



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



|                 |                            |                             |
|-----------------|----------------------------|-----------------------------|
| Transformer No. | MED4000                    | 1 -fase / -con. 50 Hz       |
| Customer        | MEDICAL ISOLATION STANDARD | Note                        |
| Assembly Comp.  | CENTER POTTED              | Date/sign. 09-13-2009 KEVIN |

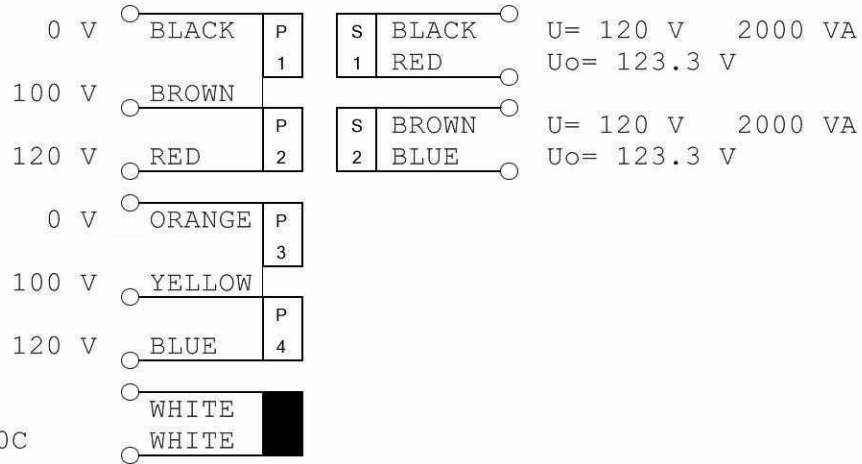

THERMAL FUSE  
THERMIK SO6 110C  
(MAX 10 AMPS)

SHIELD --- GREEN/YELLOW ---

Marking



MADE BY AMGIS LLC USA  
TRANSFORMER P/N MED4000  
PRIM.2\*(0-100-120V) 50/60Hz 4093VA  
SEC.2\*120V 2\*2000VA



Changed from

Changed to

|             |                      |                    |                   |            |
|-------------|----------------------|--------------------|-------------------|------------|
| Tests.      | Uo. Tolerance, ± 3 % | Iomax: 510.2 (mA)  | 100 V over P1.    | Isol: 4K V |
| Dimensions: | Max H: 4" (mm)       | Max. Ø: 12.3" (mm) | Terminals: 250 mm |            |

(mm)

Center potted with 1/2" dia hole  
1 pc neoprene gasket 11" dia x 1/2" ID x 1/4" thk  
  
  
  
  
  
  
Shipping Weight: 57 lbs