



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



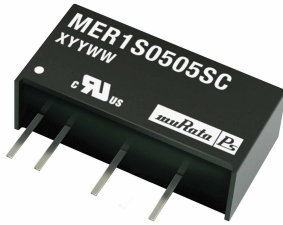

FEATURES

- UL 60950 recognized
- RoHS compliant
- Typical efficiency to 89%
- Wide temperature performance at full load, -40°C to 85°C
- UL 94V-0 package material
- No heatsink required
- Industry standard pinout
- 1kVDC isolation 'Hi Pot Test'
- 5V, 12V, 15V, 24V, & 48V inputs
- 5V, 9V, 12V, & 15V output
- Fully encapsulated with toroidal magnetics
- No external components required
- No electrolytic or tantalum capacitors

PRODUCT OVERVIEW

The MER1 series is the new high performance version of our 1W NMR series. The MER1 series is more efficient and offers improved regulation performance for applications where a wide output voltage variation can not be tolerated. They are ideally suited for providing local supplies on control system boards with the added benefit of 1kVDC galvanic isolation to reduce switching noise.

SELECTION GUIDE

| Order Code | Nominal Input Voltage | Output Voltage | Output Current | Input Current at Rated Load | Load Regulation (Typ) | Load Regulation (Max) | Ripple & Noise (Typ) ¹ | Ripple & Noise (Max) ¹ | Efficiency (Min.) | Efficiency (Typ.) | Isolation Capacitance | MTTF ² |
|-------------|-----------------------|----------------|----------------|-----------------------------|-----------------------|-----------------------|-----------------------------------|-----------------------------------|-------------------|-------------------|-----------------------|-------------------|
| | V | V | mA | mA | % | % | mVp-p | mVp-p | % | % | pF | kHrs |
| MER1S0505SC | 5 | 5 | 200 | 233 | 5.5 | 6.5 | 15 | 25 | 82 | 84 | 50 | 7684 |
| MER1S0509SC | 5 | 9 | 111 | 226 | 4.2 | 5 | 11 | 20 | 84 | 87 | 55 | 7698 |
| MER1S0512SC | 5 | 12 | 84 | 227 | 4.6 | 5.2 | 9 | 17 | 85 | 87 | 53 | 7175 |
| MER1S0515SC | 5 | 15 | 67 | 225 | 4.4 | 5 | 9 | 17 | 86 | 87.5 | 54 | 6496 |
| MER1S1205SC | 12 | 5 | 200 | 97 | 4.5 | 5 | 11 | 20 | 82 | 84 | 49 | 7569 |
| MER1S1209SC | 12 | 9 | 111 | 95 | 3 | 3.4 | 9 | 17 | 84 | 86.5 | 66 | 7317 |
| MER1S1212SC | 12 | 12 | 84 | 93 | 3 | 3.4 | 9 | 17 | 86 | 88.5 | 91 | 6647 |
| MER1S1215SC | 12 | 15 | 67 | 94 | 2.4 | 2.7 | 7 | 17 | 85 | 88 | 78 | 6279 |
| MER1S1505SC | 15 | 5 | 200 | 79 | 3.8 | 4.5 | 10 | 20 | 81 | 83.5 | 43 | 7167 |
| MER1S1509SC | 15 | 9 | 111 | 77 | 2.4 | 2.8 | 8 | 17 | 83 | 86.5 | 68 | 6906 |
| MER1S1512SC | 15 | 12 | 84 | 76 | 2.3 | 2.7 | 7 | 15 | 84 | 87.5 | 75 | 6523 |
| MER1S1515SC | 15 | 15 | 67 | 75 | 2.4 | 2.8 | 7 | 15 | 86 | 89 | 107 | 5916 |
| MER1S2405SC | 24 | 5 | 200 | 50 | 3.1 | 3.7 | 15 | 25 | 81 | 84 | 52 | 7391 |
| MER1S2409SC | 24 | 9 | 111 | 48 | 2.1 | 2.5 | 10 | 20 | 83 | 86.5 | 75 | 6490 |
| MER1S2412SC | 24 | 12 | 84 | 48 | 1.8 | 2.4 | 9 | 20 | 84 | 87.5 | 91 | 6772 |
| MER1S2415SC | 24 | 15 | 67 | 48 | 1.7 | 2.3 | 9 | 20 | 84 | 87.5 | 101 | 5957 |
| MER1S4805SC | 48 | 5 | 200 | 26 | 3.4 | 3.9 | 19 | 30 | 77 | 79.5 | 47 | 7354 |
| MER1S4809SC | 48 | 9 | 111 | 25 | 2.4 | 2.8 | 14 | 25 | 80 | 83 | 76 | 7120 |
| MER1S4812SC | 48 | 12 | 84 | 25 | 2.0 | 2.4 | 12 | 25 | 79 | 82.5 | 88 | 7088 |
| MER1S4815SC | 48 | 15 | 67 | 25 | 1.9 | 2.4 | 11 | 25 | 80 | 83 | 103 | 7238 |

INPUT CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|--------------------------|---------------------------------------|------|------|------|--------|
| Voltage Range | Continuous operation, 5V input types | 4.5 | 5 | 5.5 | V |
| | Continuous operation, 12V input types | 10.8 | 12 | 13.2 | |
| | Continuous operation, 15V input types | 13.5 | 15 | 16.5 | |
| | Continuous operation, 24V input types | 21.6 | 24 | 26.4 | |
| | Continuous operation, 48V input types | 43.2 | 48 | 52.8 | |
| Reflected Ripple Current | 5V input types | | 7 | 15 | mA p-p |
| | 12V input types | | 4 | 12 | |
| | 15V input types | | 4 | 12 | |
| | 24V input types | | 8 | 20 | |
| | 48V input types | | 25 | 40 | |

ABSOLUTE MAXIMUM RATINGS

| | |
|---|-------|
| Lead temperature 1mm from case for 10 seconds | 260°C |
| Input voltage V _{IN} , 5Vin types | 7V |
| Input voltage V _{IN} , 12Vin types | 15V |
| Input voltage V _{IN} , 15Vin types | 18V |
| Input voltage V _{IN} , 24Vin types | 28V |
| Input voltage V _{IN} , 48Vin types | 54V |

- See Ripple & Noise characterisation method.
 - Calculated using MIL-HDBK-217F FN2 with nominal input voltage at full load.
- All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.



For full details go to
www.murata-ps.com/rohs

OUTPUT CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|----------------------------|---|------|------|------|-------|
| Rated Power | T _A =-40°C to 85°C | | | 1 | W |
| Voltage Set Point Accuracy | See tolerance envelope | | | | |
| Line regulation | High V _{IN} to low V _{IN} | | 1.05 | 1.1 | %/% |

ISOLATION CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|------------------------|---------------------------|------|------|------|-------|
| Isolation test voltage | Flash tested for 1 second | 1000 | | | VDC |
| Resistance | Viso= 1000VDC | 10 | | | GΩ |


GENERAL CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|---------------------|-----------------------|------|------|------|-------|
| Switching frequency | 5V & 48V input types | | 62 | | kHz |
| | 12V & 15V input types | | 75 | | |
| | 24V input types | | 82 | | |


TEMPERATURE CHARACTERISTICS

| Parameter | Conditions | Min. | Typ. | Max. | Units |
|-------------------------------------|---|------|------|----------|-------|
| Specification | All output types | -40 | | 85 | °C |
| Storage | | -50 | | 125 | |
| Case Temperature rise above ambient | 5V, 12V, & 15V input types 24V & 48V input types | | | 15 20 | |
| Cooling | Free air convection | | | | |

TEMPERATURE DERATING GRAPH

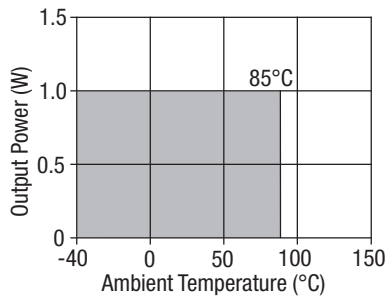

OUTPUT VOLTAGE TOLERANCE ENVELOPE

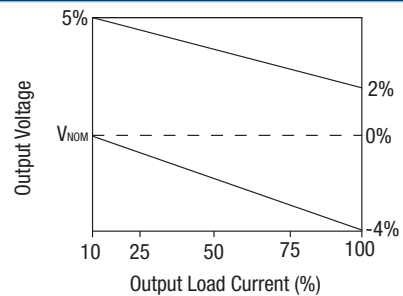

The voltage tolerance envelope shows typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading.

RoHS COMPLIANT INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. They are backward compatible with Sn/Pb soldering systems. For further information, please visit www.murata-ps.com/rohs

APPLICATION NOTES

Minimum load


The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

Capacitive loading and start up

Typical start up times for this series, with a typical input voltage rise time of 2.2µs and output capacitance of 10µF, are shown in the table below. The product series will start into a capacitance of 47µF with an increased start time, however, the maximum recommended output capacitance is 10µF.

| Start-up time | | Start-up time | |
|---------------|------|---------------|------|
| µs | | µs | |
| MER1S0505SC | 600 | MER1S1512SC | 3375 |
| MER1S0509SC | 1730 | MER1S1515SC | 5090 |
| MER1S0512SC | 3780 | MER1S2405SC | 431 |
| MER1S0515SC | 6700 | MER1S2409SC | 245 |
| MER1S1205SC | 750 | MER1S2412SC | 1634 |
| MER1S1209SC | 2605 | MER1S2415SC | 2682 |
| MER1S1212SC | 3754 | MER1S4805SC | 512 |
| MER1S1215SC | 5280 | MER1S4809SC | 1432 |
| MER1S1505SC | 704 | MER1S4812SC | 2528 |
| MER1S1509SC | 1859 | MER1S4815SC | 3884 |

Typical Start-Up Wave Form

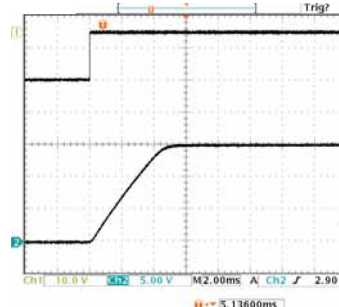


Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

| | |
|-------|--|
| C1 | 1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC/DC converter |
| C2 | 10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC/DC converter with an ESR of less than 100mΩ at 100 kHz |
| C3 | 100nF multilayer ceramic capacitor, general purpose |
| R1 | 450Ω resistor, carbon film, ±1% tolerance |
| R2 | 50Ω BNC termination |
| T1 | 3T of the coax cable through a ferrite toroid |
| RLOAD | Resistive load to the maximum power rating of the DC/DC converter. Connections should be made via twisted wires |

Measured values are multiplied by 10 to obtain the specified values.

Differential Mode Noise Test Schematic

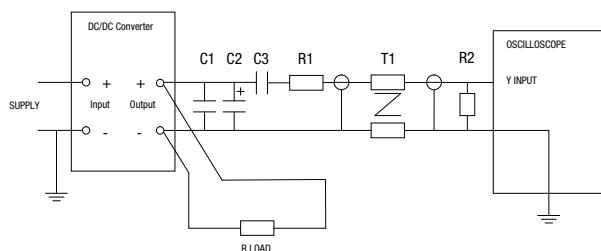

APPLICATION NOTES (continued)

Output Ripple Reduction


By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.

Component selection

Capacitor: It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended.

The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC/DC converter.

Inductor: The rated current of the inductor should not be less than that of the output of the DC/DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC/DC converter. The SRF (Self Resonant Frequency) should be >20MHz.

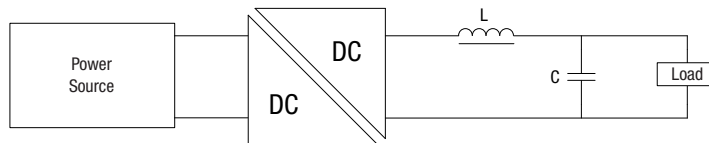

| | Inductor | | | Capacitor |
|-------------|------------|--------|--------------|------------|
| | L, μ H | SMD | Through Hole | C, μ F |
| MER1S0505SC | 10 | 82103C | 11R103C | 4.7 |
| MER1S0509SC | 22 | 82223C | 11R223C | 2.2 |
| MER1S0512SC | 47 | 82473C | 11R473C | 1 |
| MER1S0515SC | 47 | 82473C | 11R473C | 1 |
| MER1S1205SC | 10 | 82103C | 11R103C | 4.7 |
| MER1S1209SC | 22 | 82223C | 11R223C | 2.2 |
| MER1S1212SC | 47 | 82473C | 11R473C | 1 |
| MER1S1215SC | 47 | 82473C | 11R473C | 1 |
| MER1S1505SC | 10 | 82103C | 11R103C | 4.7 |
| MER1S1509SC | 22 | 82223C | 11R223C | 2.2 |
| MER1S1512SC | 47 | 82473C | 11R473C | 1 |
| MER1S1515SC | 47 | 82473C | 11R473C | 1 |
| MER1S2405SC | 10 | 82103C | 11R103C | 4.7 |
| MER1S2409SC | 22 | 82223C | 11R223C | 2.2 |
| MER1S2412SC | 47 | 82473C | 11R473C | 1 |
| MER1S2415SC | 47 | 82473C | 11R473C | 1 |
| MER1S4805SC | 10 | 82103C | 11R103C | 4.7 |
| MER1S4809SC | 22 | 82223C | 11R223C | 2.2 |
| MER1S4812SC | 47 | 82473C | 11R473C | 1 |
| MER1S4815SC | 47 | 82473C | 11R473C | 1 |

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions MER1 series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1kVDC for 1 second.

A question commonly asked is, "What is the continuous voltage that can be applied across the part in normal operation?"

The MER1 has been recognized by Underwriters Laboratory for functional insulation, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system.

The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The MER1 series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

SAFETY APPROVAL

The MER1 series has been recognized by Underwriters Laboratory (UL) to UL 60950 for functional insulation in a maximum ambient temperature of 85°C and/or case temperature limit of 130°C (case temperature measured on the face opposite the pins). File number E151252 applies.

The MER1 Series of converters are not internally fused so to meet the requirements of UL 60950 an anti-surge input line fuse should always be used with ratings as defined below.

MER1S05xxSC: 1A

MER1S12xxSC: 0.375A

MER1S15xxSC: 0.375A


MER1S24xxSC: 0.2A

MER1S48xxSC: 0.1A


All fuses should be UL approved and rated to at least the maximum allowable DC input voltage.

EFFICIENCY VS LOAD


MER1S05XXSC

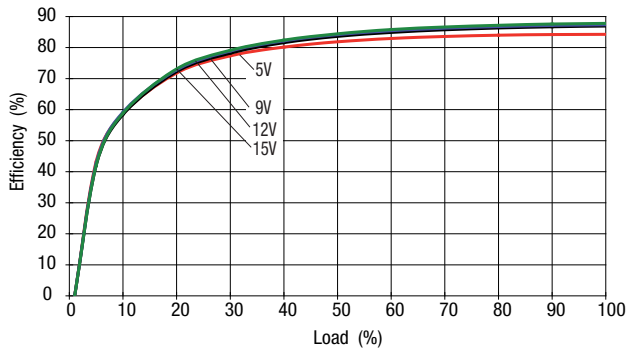


MER1S12XXSC

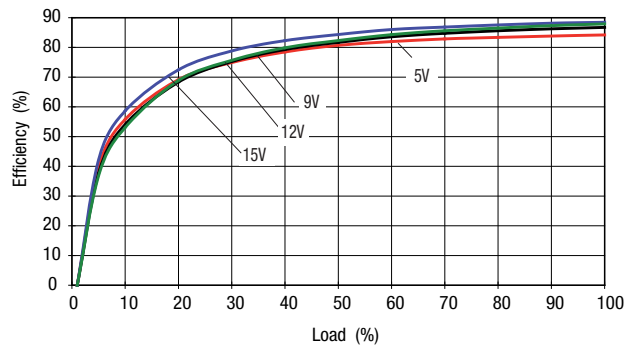


MER1S15XXSC

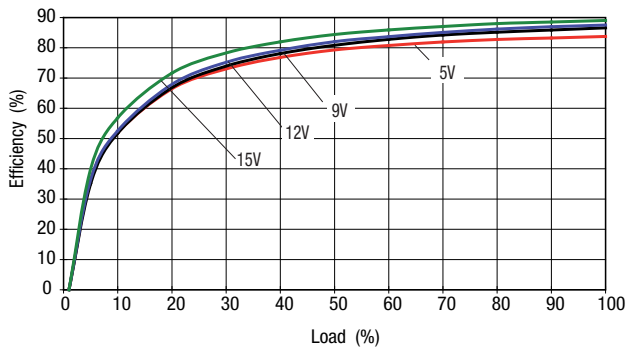

MER1S24XXSC

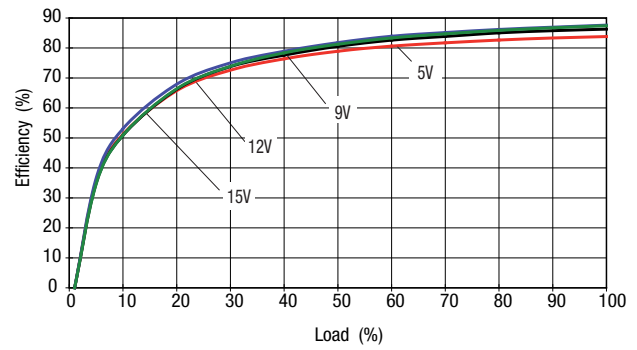


MER1S48XXSC

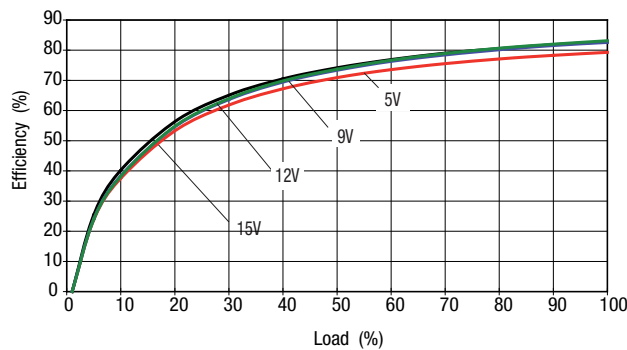

EMC FILTERING AND SPECTRA


FILTERING

An input capacitor and inductor is required to meet EN 55022 Curve B, Quasi-Peak EMC limit, as shown in the following plots. The following plots show positive and negative quasi peak and CISPR22 Average Limit B (green line) and Quasi Peak Limit B (pink line) adherence limits.

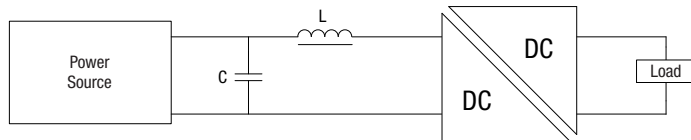


| | Inductor | | | Capacitor C, μ F |
|-------------|------------|--------|--------------|-------------------------|
| | L, μ H | SMD | Through Hole | |
| MER1S0505SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S0509SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S0512SC | 10 | 82103C | 11R103C | 1 |
| MER1S0515SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S1205SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S1209SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S1212SC | 10 | 82103C | 11R103C | 0.68 |
| MER1S1215SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S1505SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S1509SC | 10 | 82103C | 11R103C | 1 |
| MER1S1512SC | 10 | 82103C | 11R103C | 1 |
| MER1S1515SC | 10 | 82103C | 11R103C | 1 |
| MER1S2405SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S2409SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S2412SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S2415SC | 10 | 82103C | 11R103C | 2.2 |
| MER1S4805SC | 10 | 82103C | 11R103C | 4.7 |
| MER1S4809SC | 10 | 82103C | 11R103C | 4.7 |
| MER1S4812SC | 10 | 82103C | 11R103C | 4.7 |
| MER1S4815SC | 10 | 82103C | 11R103C | 4.7 |

MER1S0505SC

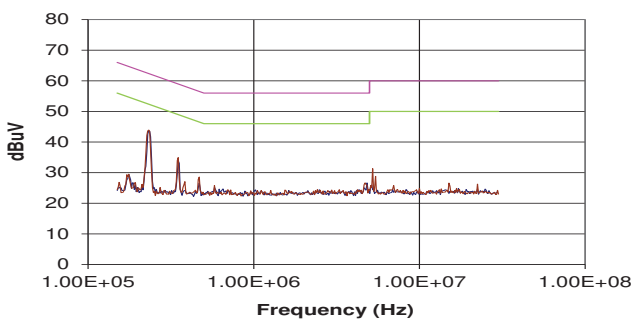


MER1S0509SC

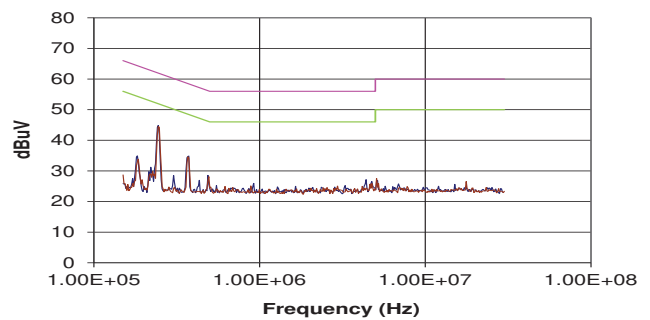


EMC FILTERING AND SPECTRA


MER1S0512SC

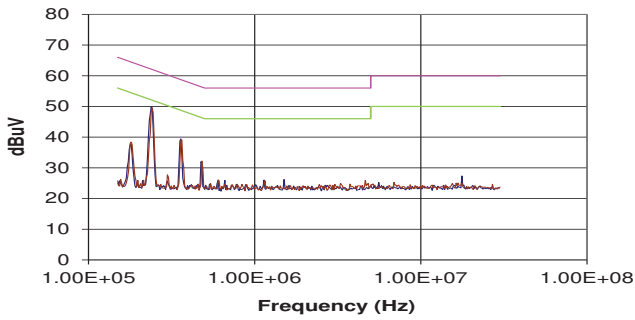


MER1S0515SC

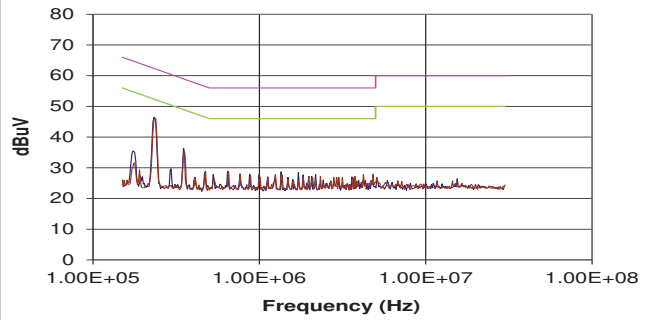


MER1S1205SC

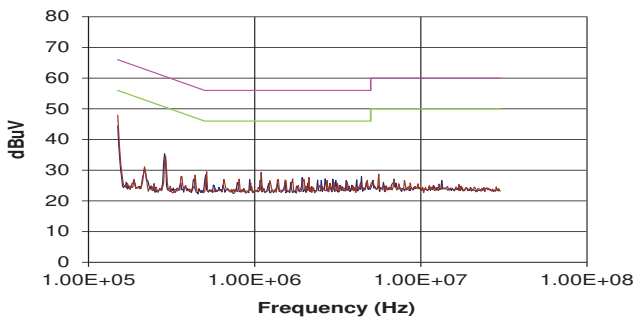


MER1S1209SC

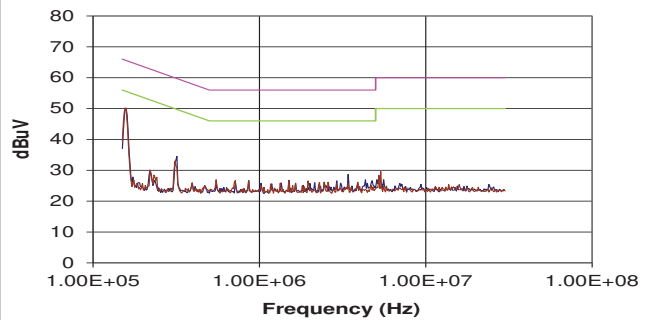

MER1S1212SC

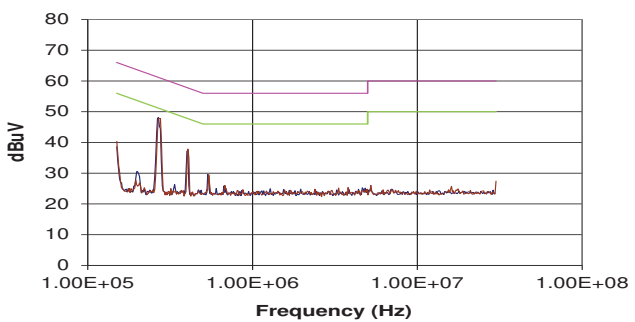


MER1S1215SC

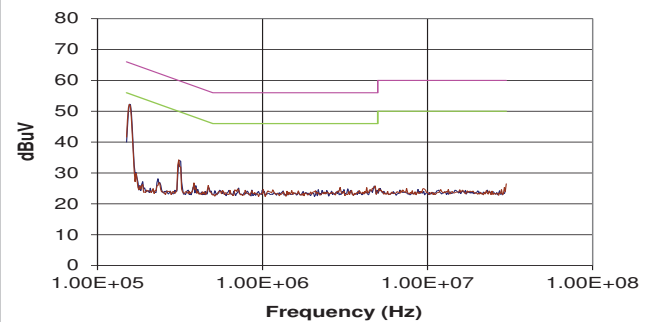


EMC FILTERING AND SPECTRA


MER1S1505SC

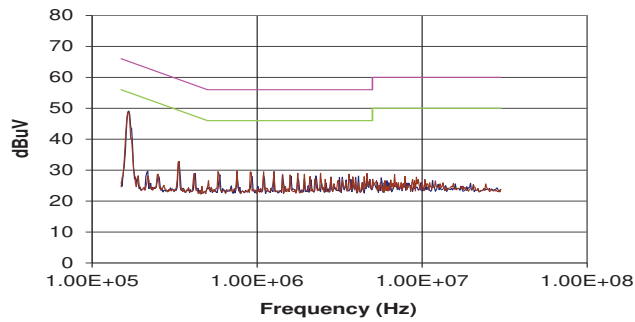


MER1S1509SC

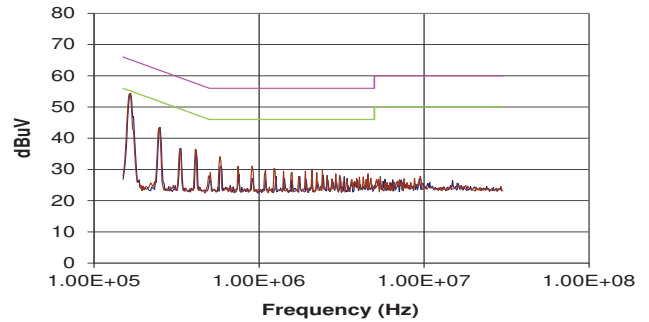


MER1S1512SC

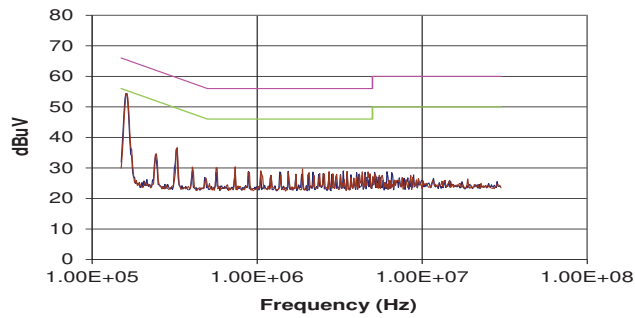


MER1S1515SC

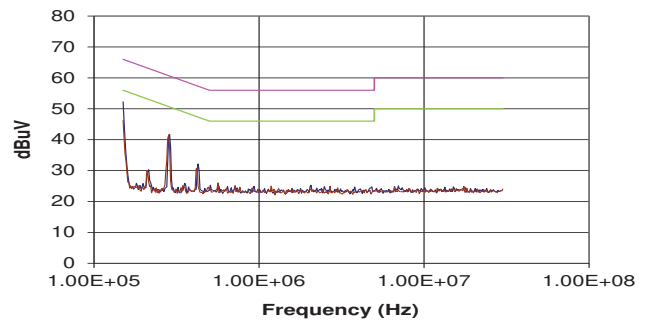

MER1S2405SC

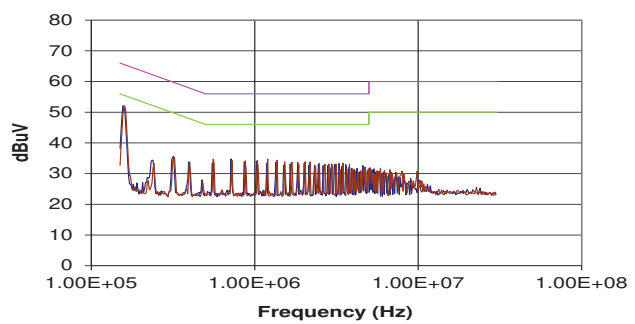


MER1S2409SC

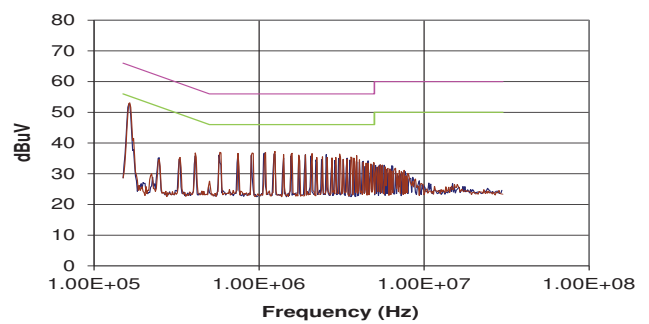


EMC FILTERING AND SPECTRA (continued)


MER1S2412SC

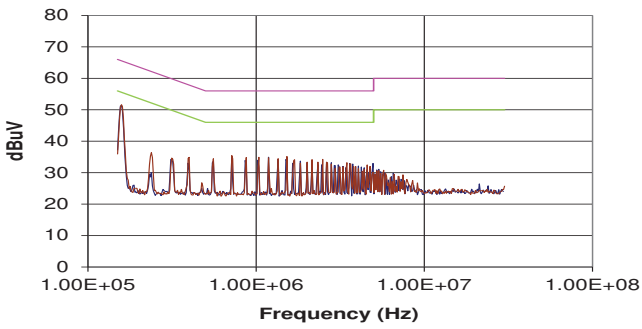


MER1S2415SC

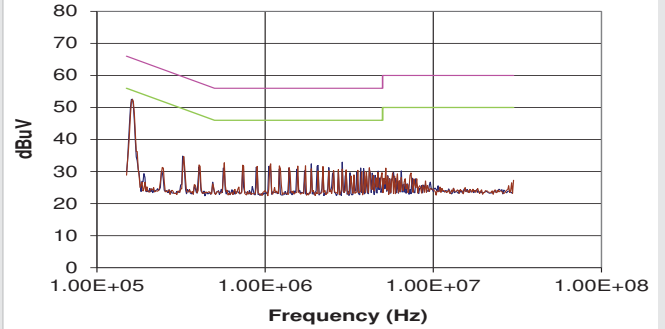


MER1S4805SC

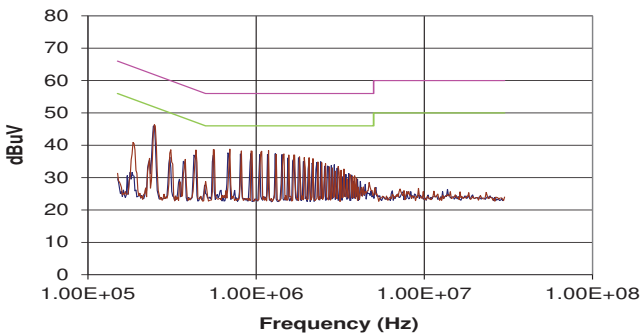


MER1S4809SC

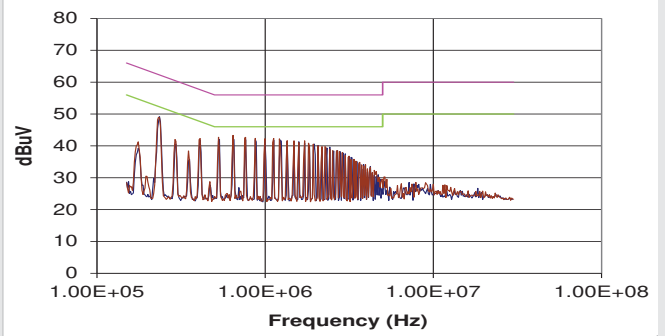

MER1S4812SC

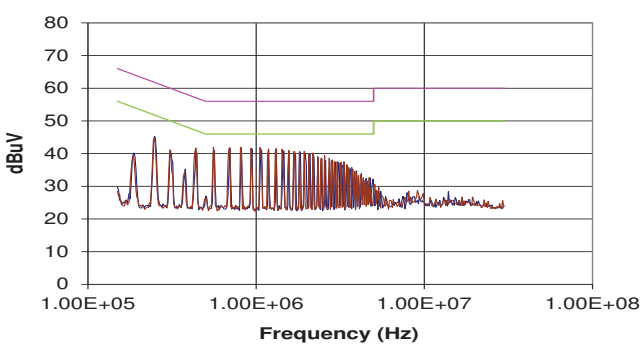


MER1S4815SC

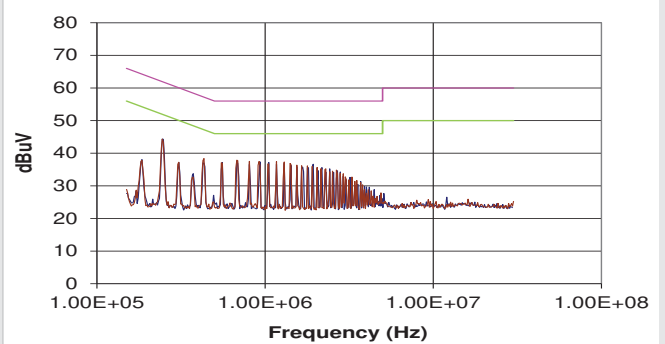

PACKAGE SPECIFICATIONS

MECHANICAL DIMENSIONS

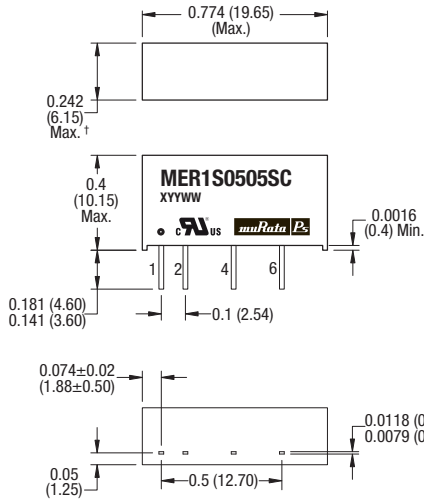


Unless otherwise stated, all dimensions in inches ± 0.01 (mm ± 0.25 mm). All pins on a 0.1 (2.54) pitch and within ± 0.01 (0.25) of true position.
 † 48V input variants: 0.301 (7.65). Weight: 48Vin types: 2.75g (Typ.), all other types: 2.25g (Typ.)

PIN CONNECTIONS


| Pin | Function |
|-----|----------|
| 1 | +VIN |
| 2 | -VIN |
| 4 | -VOUT |
| 6 | +VOUT |

RECOMMENDED FOOTPRINT DETAILS

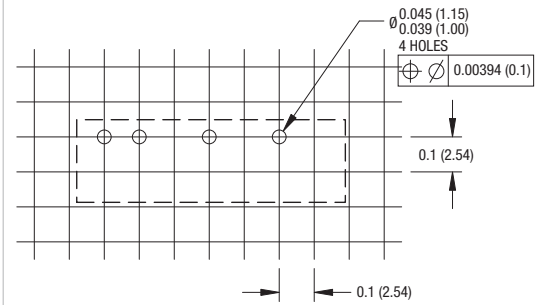

Unless otherwise stated all dimensions in inches (mm) ± 0.5 mm.

TUBE OUTLINE DIMENSIONS

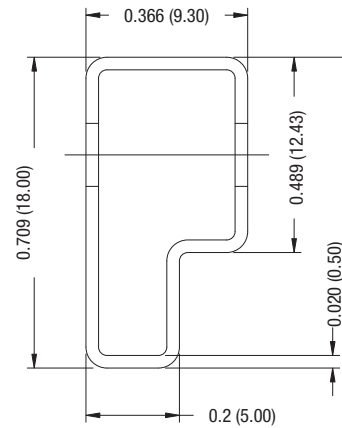

Unless otherwise stated all dimensions in inches (mm) ± 0.5 mm.
 Tube length : 20.47 (520mm ± 2 mm). Tube Quantity : 25

Murata Power Solutions, Inc.
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
 ISO 9001 and 14001 REGISTERED



This product is subject to the following **operating requirements** and the **Life and Safety Critical Application Sales Policy**:
 Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.
 © 2016 Murata Power Solutions, Inc.