

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Status

REVISION -09/09/97 TS


REVISION A REVISED AND REDRAWN ON CAD 9/9/97 TS

REVISION B ADDED RoHS 12/02/05 MP TELECOMMUNICATION COUPLING MINIATURE ENCAPSULATED TRANSFORMER DESIGNED TO OPERATE 40mW MAX IN PRIMARY AND REFLECT A PRIMARY SOURCE IMPEDANCE OF APPROXIMATELY $10K\Omega$ CT WITH $2K\Omega$ CT LOAD ON SECONDARY.

- A. Electrical Specifications (@ 20 ° C)
 - 1. Pri Source Impedance; 10KΩ CŤ
 - 2. Sec Load Impedance; $2K\Omega$ CT
 - 3. Pri DC Current; 1 mA MAX
 - 4. Operating Level; 40 mW MAX @ 300 Hz
 - 5. Frequency Response (relative to 1 KHz); ±2.0 dB, @ 300 Hz to 100 KHz
 - 6. Longitudinal Balance; 60 dB MIN @ 1 KHz
 - 7. DC Resistance;
 - (1-3) 1000Ω ±20% (4-6) 300Ω ±20%
 - 8. Turns Ratio; (1-3): (4-6) = 2.23 : 1 ±2%
 - 9. Dielectric Strength;

500 Vrms 0.5 minute @ Pri - Sec

B. Marking; MET-11, TAMURA, Primary and Secondary Impedence, PM19-M, MICROTRAN, TF5S21ZZ, Date code, and Country of origin

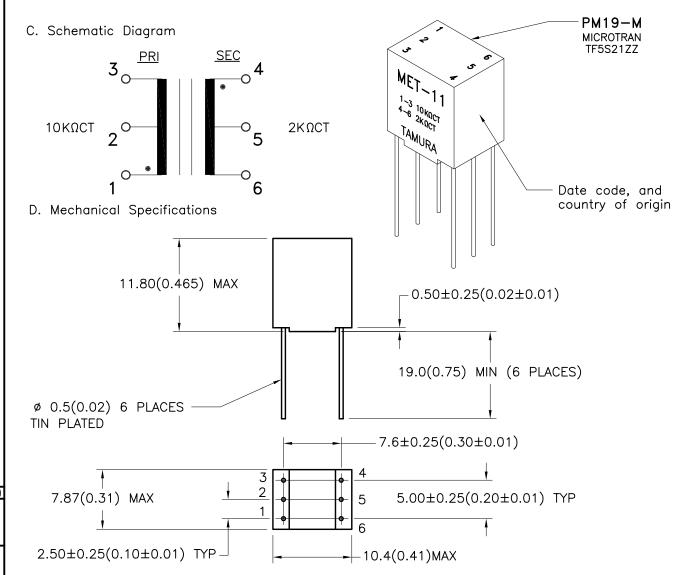

TOLERANCES (mm) 4 ± 0.2 $4 \le 20 \pm 0.3$ $20 \le 50 \pm 0.4$

PREPARED BY:

K. BRENNAN

ENGINEER: M. PITCHAI

QUALITY CONTROL:

T. CLEM

Y. SEKIGUCHI

APPROVED:

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT SUBJECT TO (

P-A1-10285

ACAD\MET\A1102851.DWG

CONTROL NO. REV

AUDIO COUPLING MINIATURE ENCAPSULATED TRANSFORMER

TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (951) 699-1270 FAX 9516769482 MET-11

MODEL SPECIFICATION DIM: mm(In) SCL: 2/1 SH: 1 0F

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.