



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




MF58 MF51



CANTHERM

Supplying high-quality bimetal and thermal sensor products.

PRECISION GLASS ENCAPSULATED
NTC THERMISTORS (MF58 & MF51)



MF58



Glass Shell Precision NTC Thermistors


The MF58 is a NTC thermistor which is manufactured using a combination of ceramic and semiconductor techniques. It is equipped with tinned axial leads and then wrapped with purified glass.

Applications

Temperature compensation and detection for:

- Household appliances (air conditioners, microwave ovens, electric fans, electric heaters etc.)
- Office equipment (copiers, printers etc.)
- Industrial, medical, environmental, weather and food processing equipment
- Liquid level detection and flow rate measurement
- Mobile phone battery
- Apparatus coils, integrated circuits, quartz crystal oscillators and thermocouples.

Dimensions (mm)

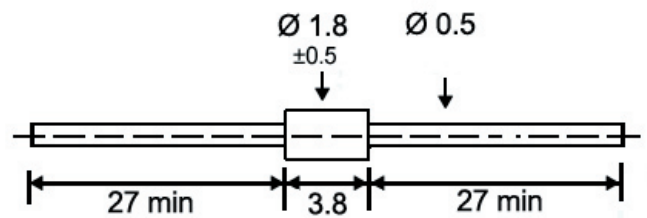


Features

- Good stability and repeatability
- High reliability
- Wide range of resistance: 0.1~1000K Ω
- Tight tolerance on resistance and Beta values
- Usable in high-temperature and high-moisture environments
- Small, light, strong package,
- Suitable for automatic insertion on thru-hole PCBs
- Rapid response
- High sensitivity


Main Techno-Parameter

- Zero power resistance range (R25): 0.1~1000K Ω
- Available tolerances of R25:
F=±1% G=±2% H=±3% J=±5% K=±10%
- B value (B25/50°C) range: 3100~4500K
- Available tolerances of B value: ±0.5%, ±1%, ±2%
- Dissipation factor: $\geq 2\text{mW}/^\circ\text{C}$ (In Still Air)
- Thermal time constant: $\leq 20\text{S}$ (In Still Air)
- Operating temperature range: $-55^\circ\text{C} \sim +200^\circ\text{C}$
- Rated Power: $\leq 50\text{mW}$

Specifications

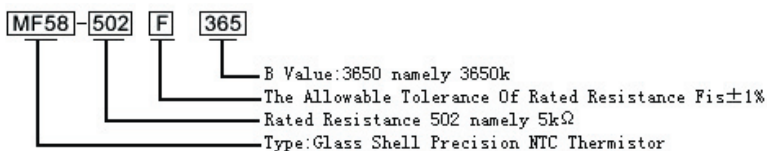

MF51-B

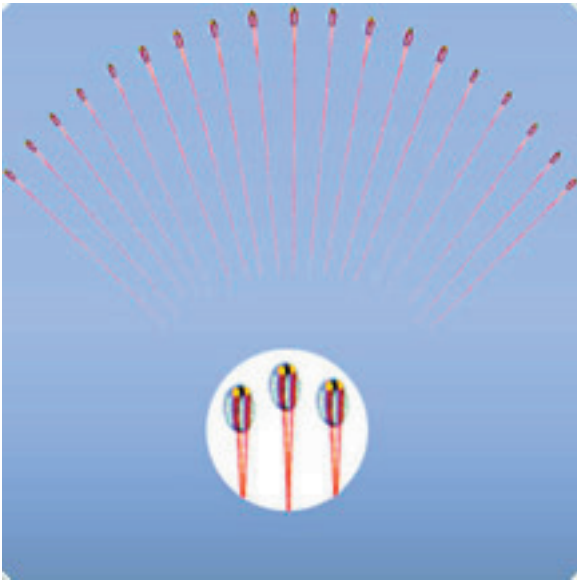


Precision Glass Encapsulated NTC Thermistor for Temperature Measurement

The MF51 NTC thermistor is a small chip thermistor encased in glass with bare radial copper leads. The chip is made from a new material using new techniques which provide benefits such as high precision, fast response, reliable stability, no aging effect and improved moisture resistance.

Applications

It can be used in applications such as refrigeration, HVAC, heating equipment, electronic thermostats, liquid level sensing, automotive electronics, electronic dashboards, etc.

Dimensions (mm)

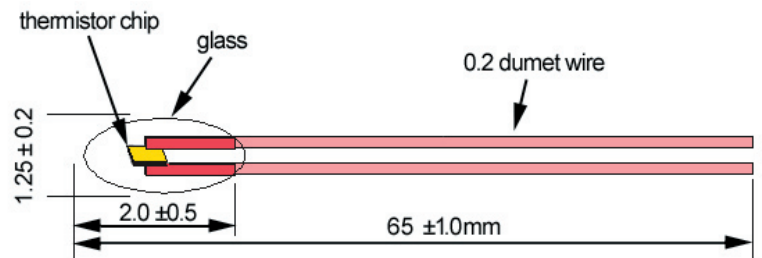

Specifications

MF51 B 103 F 3380

F = ±1%
G = ±2%
H = ±3%
J = ±5%

- The first pane holds the dimensional code.
 - The second pane shows the rated resistance at 25C (R25).
 - The third pane shows the tolerance code of rated resistance.
 - The fourth pane shows the Beta value (B25/50C)
- Type high precision temp. measurement chip in glass NTC thermistor

Note: Specifications can change without notice.

MF51 Continued >



CANTHERM

MF51-B Physical Characteristics

Model	Dissi. Coef (mW/°C)	Thermal Time Constant (S)
	In still air	In still air
MF51-B	≥ 1.0	≤ 12

Model	Rated Resistance R25		B Value (25/50°C)		Operating Temp. (°C)
	KΩ	Tolerance	K	Tolerance	
MF51B __3380	2 - 10	± 1% ± 2% ± 3% ± 5%	3380	* ± 2% ± 3%	-50°C–260°C
MF51B __3950	10 - 50		3950		
MF51B __3950	50 - 100		3950		
MF51B __4150	100 - 350		4150		

* If the tolerance of R25 is ±1%, the tolerance of B25/50 = ±1%.

If the tolerance of R25 is ±2% or greater, the tolerance of B25/50 = ±2%.



CANTHERM

Supplying high-quality bimetal and thermal sensor products.

8415 Mountain Sights Avenue • Montreal (Quebec), H4P 2B8, Canada

Tel: (514) 739-3274 • 1-800-561-7207 • Fax: (514) 739-2902 • E-mail: sales@cantherm.com

Website: www.cantherm.com | Division of Microtherm

2011/Jan MF51/MF58