



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# T-1 3/4 SUB-MINIATURE LAMP

## Socket and Fresnel Lens

- Flange Base Socket for Model MF200

### TO ORDER, FOLLOW THE EXAMPLE:

Select one **BOLD** component from each SHADED column in the tables below.

<b>1</b> Socket		
MFS1-B		
<b>1</b> Model	<b>2</b> Lens Diffusion	<b>3</b> Lens Color
MF61	-C	R


→ Part Number **MFS1-B** (Socket)  
**MF61-CR** (Model MF61, Clear Red Lens)

SOCKET	
1 Part #	Description
MFS1-B <sup>[1]</sup>	For Use With Model MF200 and MF61 lens


Lens (For Use With MFS1-B Socket)		
1 MODEL	2 Lens Diffusion	3 Lens Color
MF61	-C Clear	R Red
	-N Diffused	A Amber
		Y Yellow
		G Green
		B Blue
		W Water Clear
		-S <sup>[2]</sup> Smoke



### MFS1-B

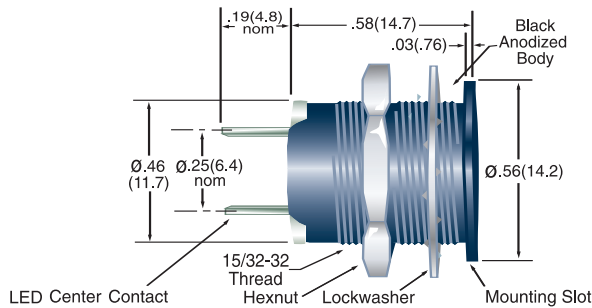

### MF61

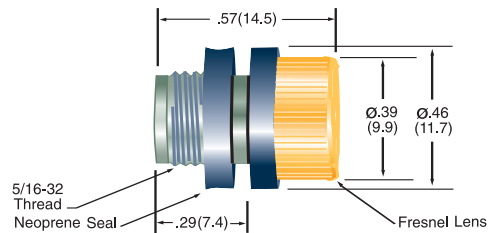

[1] For Mounting Diameter .470" +/- .005"; Panel Thickness 1/16" to 5/16".  
 [2] Do not select a Diffusion Code (e.g. MF61-S).

### All dimensions are in inches (mm)

Tolerances: .xx"(x) ±.025"(.63) / .xxx"(xx)±.010"(.25)  
 Specifications are subject to change without notice.