



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



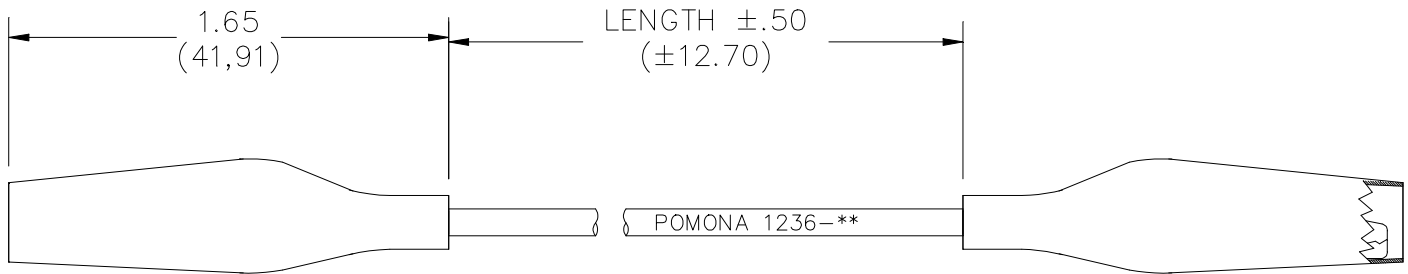

FEATURES:

- Features flex boots for insulation protection.
- Alligators are nickel plated for tarnish resistance.
- Alligator clip has .187" (4.75mm) max. jaw opening.
- Ideal for use as a temporary wire.

MATERIALS:

Alligator:

Body: Steel, Nickel Plated

Spring: Stainless Steel

Flex Boot: Vinyl

Wire:

(Model 1236) 20 AWG, Stranding: 41 x 36 tinned copper, PVC Insulation, .087" (2.21 mm) O.D.

Marking: "POMONA 1236-XX"

(Model MG-B) 18 AWG, Stranding: 65 x 36 tinned copper, PVC Insulation, .144" (3.66 mm) O.D.

Marking: "POMONA MG-B-XX"

RATINGS:

Operating Voltage: 33VRMS/70VDC MAX

Operating Temperature: +50°C (+122°F)

Current: 5 Amperes

ORDERING INFORMATION: XX = Length in inches

Model 1236-XX-*

Standard Lengths: 24" (60.96mm)

Additional lengths can be quoted upon request.

Model MG-B-XX-*

Standard Lengths: 12" (30.48mm), 24" (60.96mm)

Additional lengths can be quoted upon request.

* = Color of Flex Boot and Wire, -0 Black, -2 Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

10/1/07

D1093637
Rev. 101

Sales: 800-490-2361 Fax: 425-446-5844
Technical Support: technicalsupport@pomonatest.com

www.pomonaelectronics.com
Page 1 of 1