



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MGA-30989

2 - 6GHz, High Linearity Gain Block



Data Sheet


Description

Avago Technologies' MGA-30989 is a broadband, high linearity gain block MMIC amplifier achieved through the use of Avago Technologies' proprietary 0.25um GaAs Enhancement-mode pHEMT process.


The device required simple dc biasing components to achieve wide bandwidth performance. The temperature compensated internal bias circuit provides stable current over temperature and process threshold voltage variation.

The MGA-30989 is housed inside a low cost RoHS compliant SOT89 industry standard SMT package (4.5 x 4.1 x 1.5 mm).

Component Image

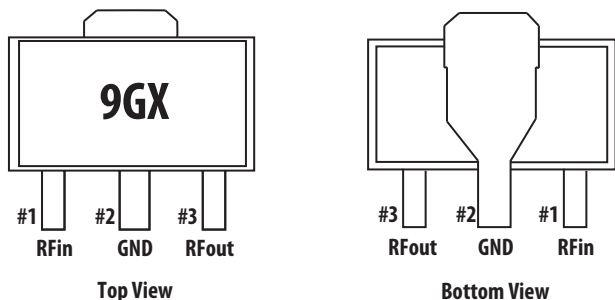

Notes:
Package marking provides orientation and identification
"9G" = Device Code
"X" = Month of Manufacture



Attention: Observe precautions for handling electrostatic sensitive devices.
ESD Machine Model = 50 V
ESD Human Body Model = 1000 V
Refer to Avago Application Note A004R: Electrostatic Discharge, Damage and Control.

Features

- High linearity
- Built in temperature compensated internal bias circuitry
- No RF matching components required
- GaAs E-pHEMT Technology^[1]
- Standard SOT89 package
- Single, Fixed 5V supply
- Excellent uniformity in product specifications
- MSL-1 and Lead-free halogen free
- High MTTF for base station application

Specifications

3.5GHz, 5V, 51mA (typical)

- 12 dB Gain
- 36.8 dBm Output IP3
- 2 dB Noise Figure
- 23.6 dBm Output Power at 1dB gain compression

5GHz, 5V, 51mA (typical)

- 9.6 dB Gain
- 38.4 dBm Output IP3
- 1.65 dB Noise Figure
- 23.8 dBm Output Power at 1dB gain compression

Applications

- IF amplifier, RF driver amplifier
- General purpose gain block

Note:

1. Enhancement mode technology employs positive gate voltage, thereby eliminating the need of negative gate voltage associated with conventional depletion mode devices.

Absolute Maximum Rating^[1] T_A=25°C

| Symbol | Parameter | Units | Absolute Max. |
|---------------------|--|-------|---------------|
| V _{dd,max} | Device Voltage, RF output to ground | V | 5.5 |
| P _{in,max} | CW RF Input Power | dBm | 24 |
| P _{diss} | Total Power Dissipation ^[3] | W | 0.47 |
| T _{j,MAX} | Junction Temperature | °C | 150 |
| T _{STG} | Storage Temperature | °C | -65 to 150 |

Thermal Resistance

Thermal Resistance^[2] $\theta_{JC} = 81.2^{\circ}\text{C}/\text{W}$
(V_{dd} = 5 V, I_{ds} = 48 mA, T_c = 85°C)

Notes:

1. Operation of this device in excess of any of these limits may cause permanent damage.
2. Thermal resistance measured using Infrared measurement technique.
3. This is limited by maximum V_{dd} and I_{ds}. Derate 12.3 mW/°C for T_c > 112°C.

Product Consistency Distribution Charts^[1, 2]

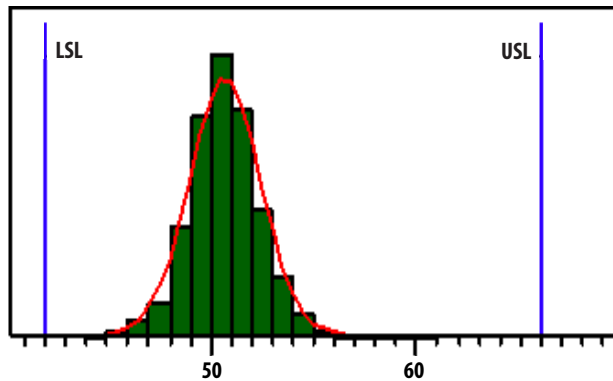


Figure 1. I_{ds}, LSL=42mA, nominal=51mA, USL=66mA

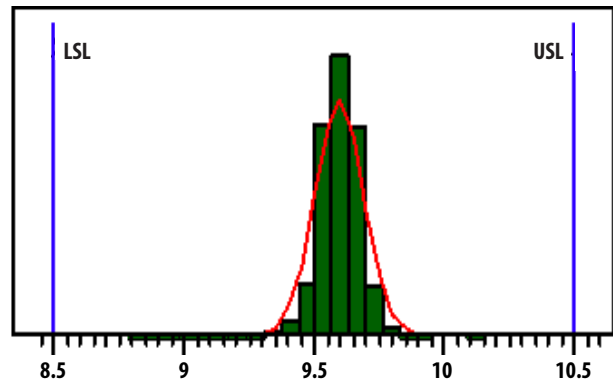


Figure 2. Gain, LSL=8.5dB, nominal=9.6dB, USL=10.5dB

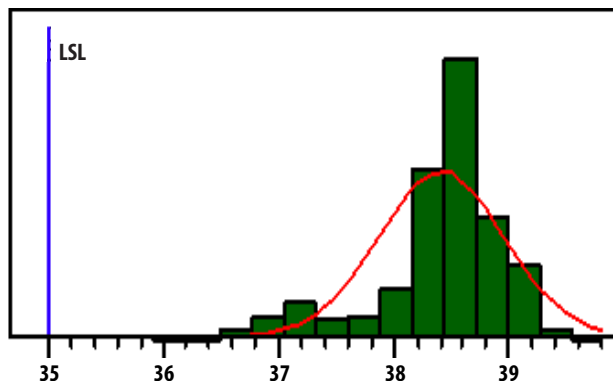


Figure 3. OIP3, LSL=35dBm, nominal=38.4dBm

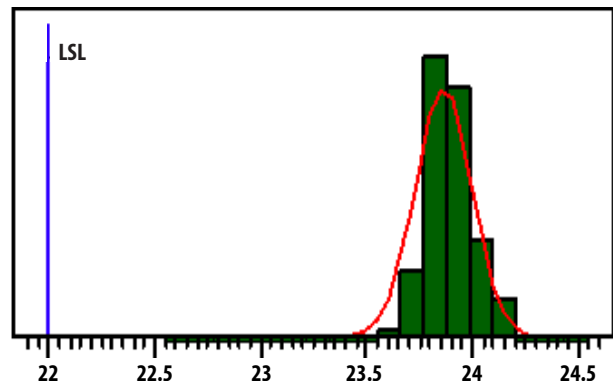


Figure 4. P1dB, LSL=22dBm, nominal=23.8dBm

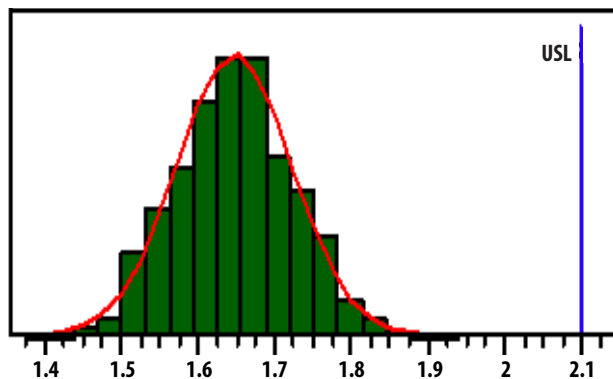


Figure 5. NF, nominal=1.65dB, USL=2.1dB

Notes:

1. Distribution data sample size is 3000 samples taken from 3 different wafer lots. Future wafers allocated to this product may have nominal values anywhere between the upper and lower limits.
2. Measurements were made on a characterization test board, which represents a trade-off between optimal OIP3, gain and P1dB. Circuit trace losses have not been de-embedded from measurements above.

Electrical Specifications ^[1]

T_A = 25°C, V_{dd} = 5V

| Symbol | Parameter and Test Condition | Frequency | Units | Min. | Typ. | Max. |
|---------------------|--------------------------------------|------------------|-------|------|--------------|------|
| I _{ds} | Quiescent current | N/A | mA | 42 | 51 | 66 |
| Gain | Gain | 3.5 GHz 5 GHz | dB | 8.5 | 12 9.6 | 10.5 |
| OIP3 ^[2] | Output Third Order Intercept Point | 3.5 GHz 5 GHz | dBm | 35 | 36.8 38.4 | - |
| NF | Noise Figure | 3.5 GHz 5 GHz | dB | - | 2 1.65 | 2.1 |
| S11 | Input Return Loss, 50Ω source | 3.5 GHz 5 GHz | dB | | -18 -16 | |
| S22 | Output Return Loss, 50Ω load | 3.5 GHz 5 GHz | dB | | -16 -15 | |
| S12 | Reverse Isolation | 3.5 GHz 5 GHz | dB | | -21 -18 | |
| OP1dB | Output Power at 1dB Gain Compression | 3.5 GHz 5 GHz | dBm | 22 | 22 23.8 | - |

Notes:

1. Measurements obtained using demo board described in Figure 22 and 23. Both 3.5GHz and 5GHz data were taken with 3GHz - 6GHz Application Test Circuits.
2. OIP3 test condition: F_{RF1} - F_{RF2} = 10MHz with input power of -10dBm per tone measured at worse side band.
3. Use proper bias, heat sink and de-rating to ensure maximum channel temperature is not exceeded. See absolute maximum ratings and application note (if applicable) for more details.

Typical Performance (2GHz - 4GHz)

$T_A = 25^\circ\text{C}$, $V_{dd} = 5\text{V}$, Input Signal = CW. Application Test Circuit is shown in Figure 22 and Table 1.

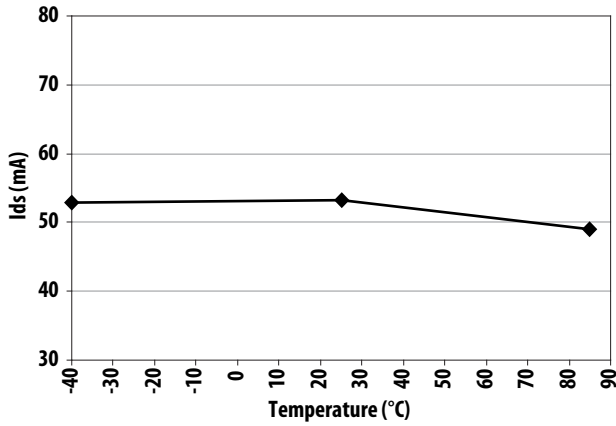


Figure 6. Ids over Temperature

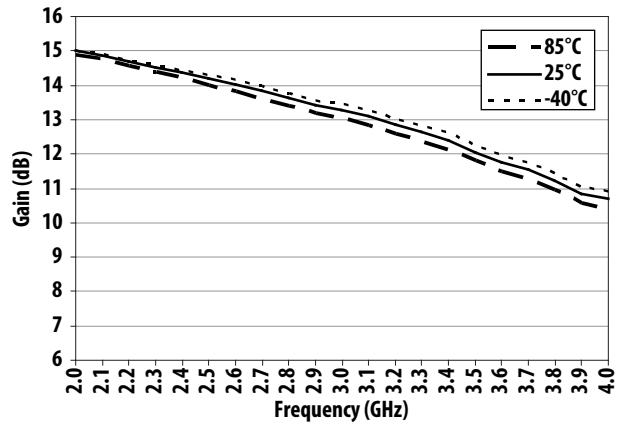


Figure 7. Gain over Frequency and Temperature

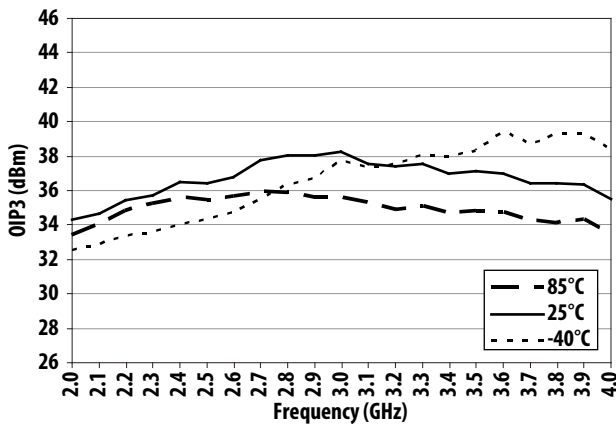


Figure 8. OIP3 over Frequency and Temperature

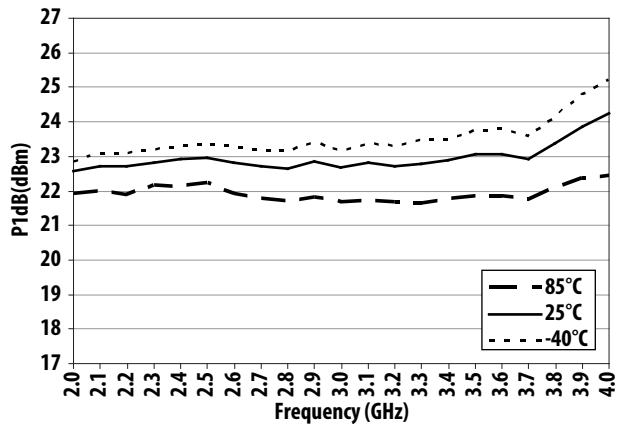


Figure 9. P1dB over Frequency and Temperature

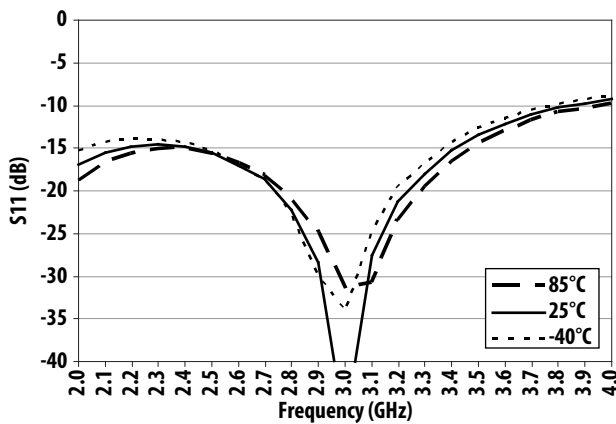


Figure 10. S11 over Frequency and Temperature

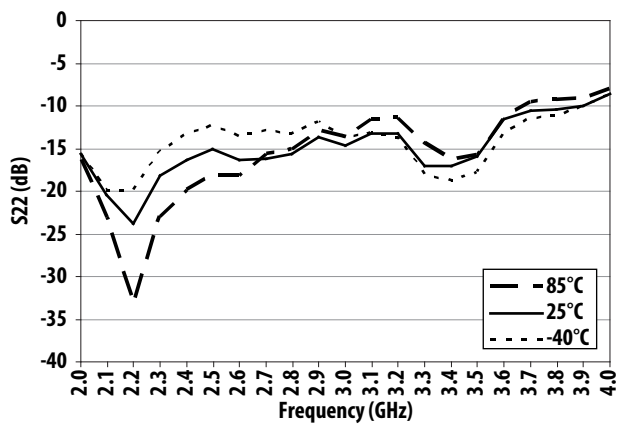


Figure 11. S22 over Frequency and Temperature

Typical Performance (2GHz - 4GHz)

T_A = 25°C, V_{dd} = 5V, Input Signal = CW. Application Test Circuit is shown in Figure 22 and Table 1.

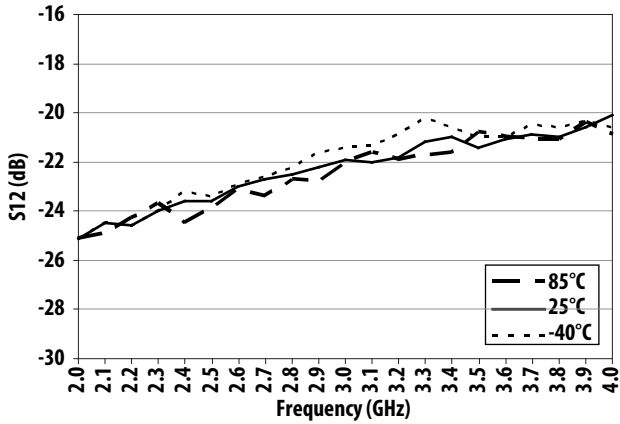


Figure 12. S12 over Frequency and Temperature

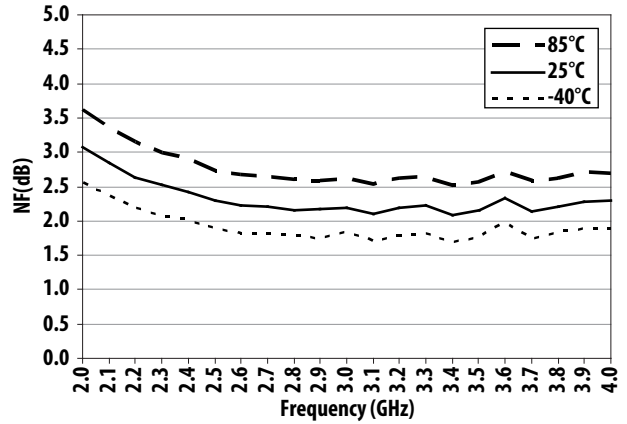


Figure 13. Noise Figure over Frequency and Temperature

Typical Performance (3GHz - 6GHz)

T_A = 25°C, V_{dd} = 5V, Input Signal = CW. Application Test Circuit is shown in Figure 22 and Table 2.

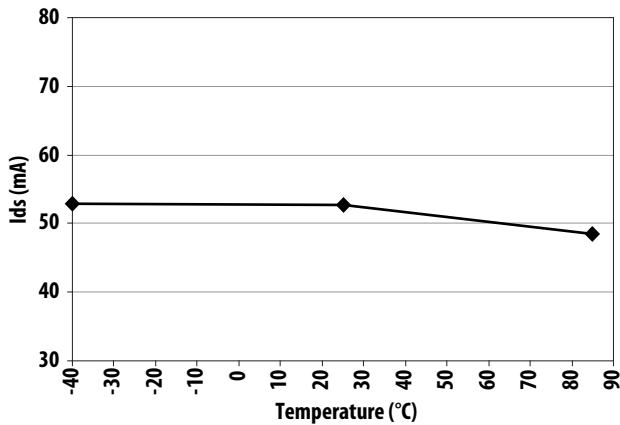


Figure 14. Ids over Temperature

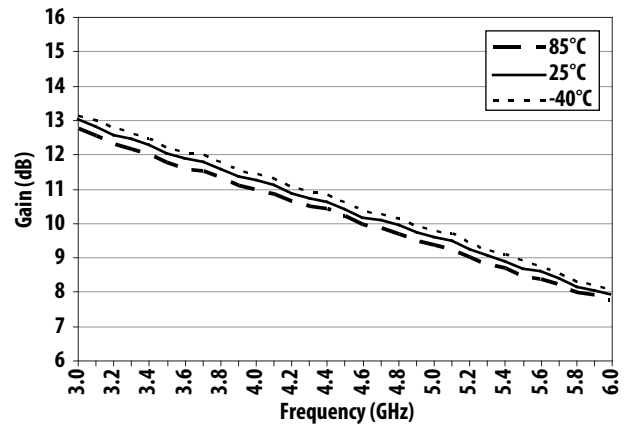


Figure 15. Gain over Frequency and Temperature

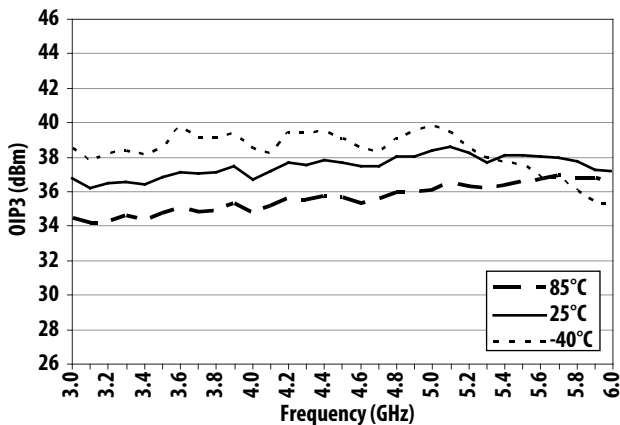


Figure 16. OIP3 over Frequency and Temperature

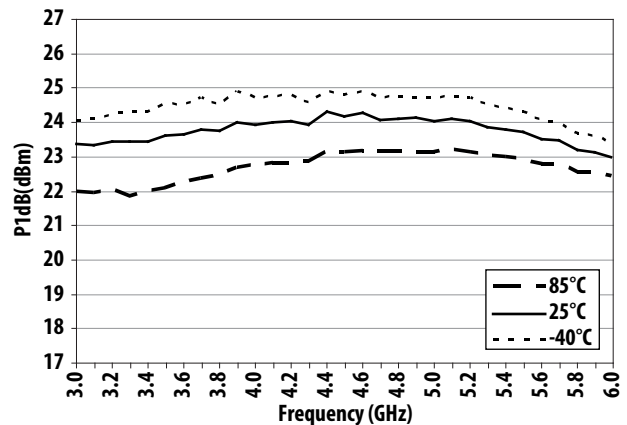


Figure 17. P1dB over Frequency and Temperature

Typical Performance (3GHz - 6GHz)

$T_A = 25^\circ\text{C}$, $V_{dd} = 5\text{V}$, Input Signal = CW. Application Test Circuit is shown in Figure 22 and Table 2.

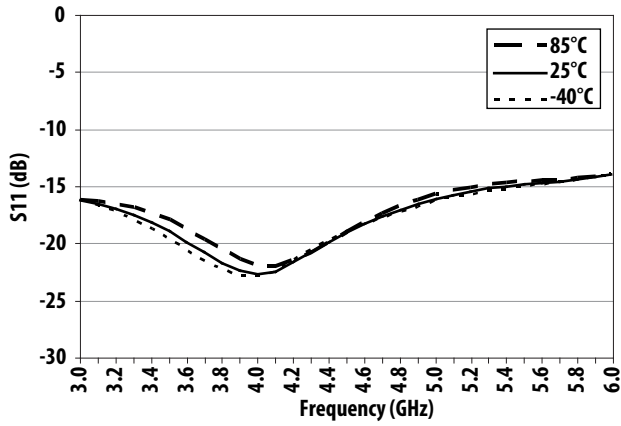


Figure 18. S11 over Frequency and Temperature

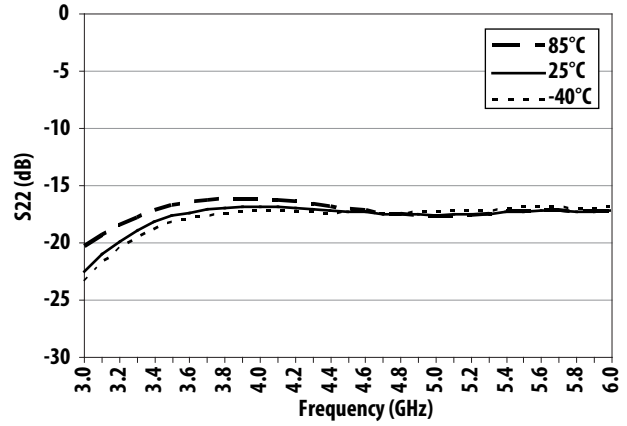


Figure 19. S22 over Frequency and Temperature

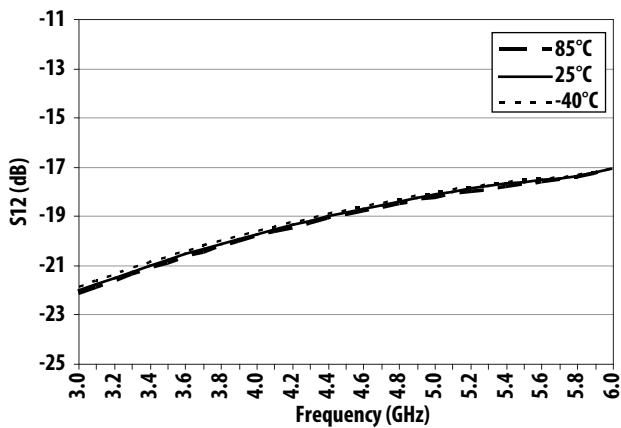


Figure 20. S12 over Frequency and Temperature

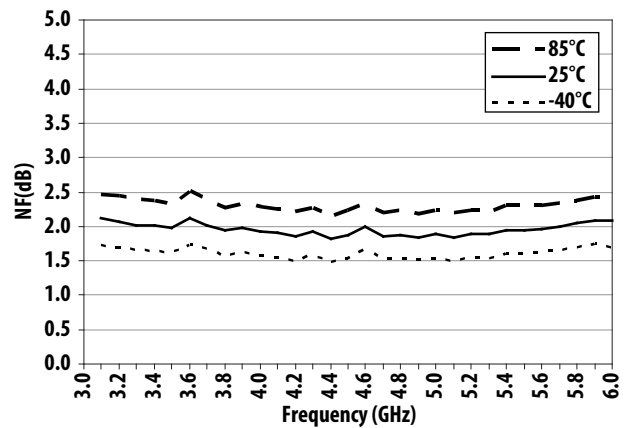


Figure 21. Noise Figure over Frequency and Temperature

Application Schematic Components Table and Demo Board

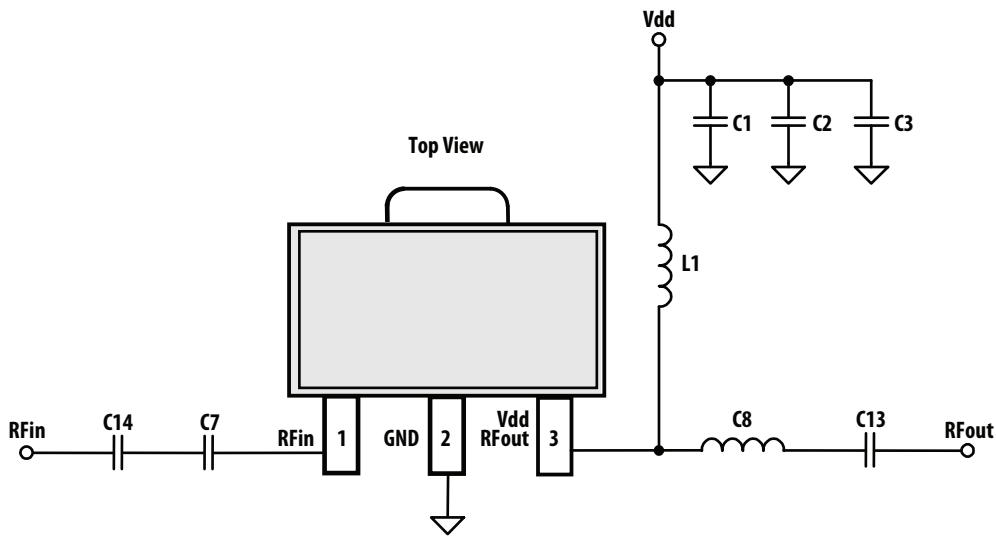


Figure 22. Application Schematic

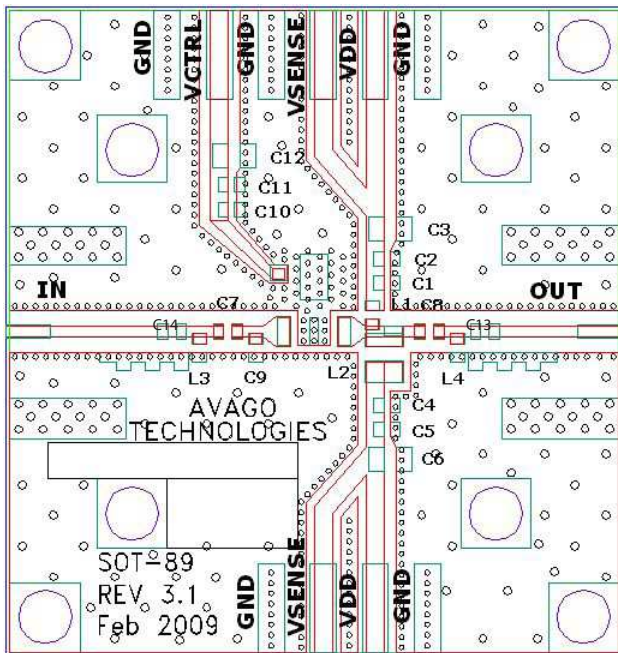


Figure 23. Demo board Layout

- Recommended PCB material is 10 mils Rogers RO4350, with FR4 backing for mechanical strength.
- Suggested component values may vary according to layout and PCB material.

Demo board Part List

Table 1. 2GHz - 4GHz Application Schematic Components

| Circuit Symbol | Size | Value | Part Number | Description |
|----------------|------|-------|-----------------------------|--------------------------|
| L1 | 0603 | 8.2nH | LLQ1608-F8N2 (Toko) | Wire Wound Chip Inductor |
| C1 | 0402 | 100pF | GRM1555C1H101JZ01 (Murata) | Ceramic Chip Capacitor |
| C2 | 0402 | 0.1uF | GRM155R71C104KA88D (Murata) | Ceramic Chip Capacitor |
| C3 | 0805 | 2.2uF | GRM21BR61E225KA12L (Murata) | Ceramic Chip Capacitor |
| C7 | 0402 | 1nH | LL1005-FHL1N0 (Toko) | MLC Inductor |
| C8 | 0402 | 1nH | LL1005-FHL1N0 (Toko) | MLC Inductor |
| C13 | 0402 | 39pF | CM05CH390J50AH (Kyocera) | Ceramic Chip Capacitor |
| C14 | 0402 | 39pF | CM05CH390J50AH (Kyocera) | Ceramic Chip Capacitor |

Table 2. 3GHz - 6GHz Application Schematic Components

| Circuit Symbol | Size | Value | Part Number | Description |
|----------------|------|-------|-----------------------------|--------------------------|
| L1 | 0603 | 8.2nH | LLQ1608-F8N2 (Toko) | Wire Wound Chip Inductor |
| C1 | 0402 | 100pF | GRM1555C1H101JZ01 (Murata) | Ceramic Chip Capacitor |
| C2 | 0402 | 0.1uF | GRM155R71C104KA88D (Murata) | Ceramic Chip Capacitor |
| C3 | 0805 | 2.2uF | GRM21BR61E225KA12L (Murata) | Ceramic Chip Capacitor |
| C7 | 0402 | 39pF | CM05CH390J50AH (Kyocera) | Ceramic Chip Capacitor |
| C8 | 0402 | 39pF | CM05CH390J50AH (Kyocera) | Ceramic Chip Capacitor |
| C13 | | | NA | |
| C14 | | | NA | |

Test Circuit for S-Parameter and Noise Parameter

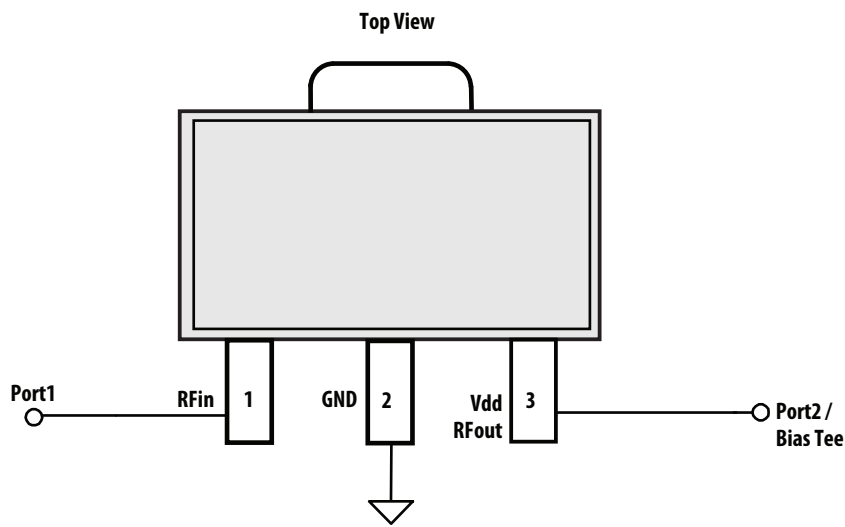


Figure 24. S-parameter and Noise parameter test circuit

Typical S-Parameter (Vdd = 5V, T_A = 25°C, 50 ohm)

| Freq (GHz) | S11 (dB) | S11 (ang) | S21 (dB) | S21 (ang) | S12 (dB) | S12 (ang) | S22 (dB) | S22 (ang) |
|------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|
| 0.1 | -0.83 | 171.33 | -49.08 | 107.91 | -70.09 | 11.18 | -11.42 | 156.15 |
| 0.5 | -0.85 | 133.94 | -29.47 | 73.45 | -72.22 | 8.53 | -9.79 | 54.38 |
| 1 | -1.73 | 69.70 | -7.88 | 124.85 | -51.74 | 42.20 | -7.59 | -28.70 |
| 1.5 | -18.64 | 13.90 | 14.19 | -16.36 | -28.40 | -110.19 | -13.30 | -84.47 |
| 2 | -16.77 | 21.81 | 15.26 | -118.45 | -24.68 | 162.38 | -16.46 | -119.30 |
| 2.2 | -17.69 | 26.98 | 15.08 | -146.17 | -23.80 | 140.85 | -20.71 | -136.97 |
| 2.4 | -17.47 | 27.84 | 14.78 | -169.72 | -23.09 | 123.10 | -27.25 | -147.15 |
| 2.6 | -17.54 | 21.54 | 14.41 | 169.77 | -22.45 | 107.84 | -36.62 | -119.61 |
| 2.8 | -18.71 | 9.75 | 14.06 | 151.46 | -21.86 | 94.47 | -33.44 | -73.79 |
| 3 | -21.50 | -7.64 | 13.71 | 134.78 | -21.30 | 82.34 | -29.50 | -90.05 |
| 3.2 | -26.62 | -45.95 | 13.35 | 119.28 | -20.77 | 71.05 | -26.66 | -116.49 |
| 3.4 | -25.94 | -124.50 | 12.98 | 104.86 | -20.30 | 60.36 | -23.92 | -140.25 |
| 3.6 | -20.44 | -160.65 | 12.60 | 91.24 | -19.87 | 50.23 | -21.74 | -159.02 |
| 3.8 | -16.93 | -177.59 | 12.21 | 78.46 | -19.49 | 40.73 | -20.32 | -173.92 |
| 4 | -14.77 | 170.22 | 11.82 | 66.38 | -19.14 | 31.67 | -19.31 | 175.19 |
| 4.2 | -13.39 | 160.76 | 11.45 | 54.96 | -18.81 | 23.05 | -19.03 | 166.34 |
| 4.4 | -12.66 | 151.96 | 11.09 | 43.99 | -18.49 | 14.81 | -19.23 | 160.06 |
| 4.6 | -12.37 | 142.32 | 10.78 | 33.45 | -18.16 | 6.72 | -19.80 | 154.58 |
| 4.8 | -12.28 | 131.95 | 10.50 | 23.16 | -17.82 | -1.24 | -20.57 | 150.45 |
| 5 | -12.32 | 119.49 | 10.23 | 12.97 | -17.50 | -9.24 | -21.46 | 145.29 |
| 5.2 | -11.90 | 102.53 | 9.97 | 2.27 | -17.18 | -17.80 | -24.67 | 123.26 |
| 5.4 | -11.51 | 86.82 | 9.69 | -7.74 | -16.90 | -25.83 | -23.37 | 106.21 |
| 5.6 | -10.94 | 70.38 | 9.40 | -17.72 | -16.65 | -33.97 | -21.51 | 91.68 |
| 5.8 | -10.14 | 53.71 | 9.10 | -27.77 | -16.45 | -42.22 | -19.44 | 79.92 |
| 6 | -9.13 | 38.09 | 8.75 | -37.67 | -16.30 | -50.47 | -17.49 | 69.67 |
| 6.2 | -8.04 | 24.75 | 8.37 | -47.47 | -16.21 | -58.70 | -15.67 | 59.26 |
| 6.4 | -6.95 | 13.52 | 7.95 | -57.15 | -16.17 | -66.81 | -13.97 | 48.91 |
| 6.6 | -5.97 | 4.20 | 7.50 | -66.64 | -16.19 | -74.66 | -12.52 | 38.89 |
| 6.8 | -5.14 | -2.97 | 7.00 | -75.60 | -16.24 | -82.14 | -11.26 | 28.93 |
| 7 | -4.46 | -8.67 | 6.51 | -83.99 | -16.31 | -89.21 | -10.27 | 19.35 |
| 8 | -2.90 | -25.68 | 4.58 | -121.23 | -16.31 | -120.23 | -7.84 | -28.28 |
| 9 | -2.46 | -52.31 | 2.99 | -158.46 | -16.20 | -152.20 | -6.19 | -69.12 |
| 10 | -1.73 | -90.52 | 0.67 | 164.95 | -16.99 | 175.54 | -4.64 | -97.97 |
| 11 | -0.89 | -118.15 | -2.55 | 136.43 | -18.81 | 150.58 | -3.14 | -118.40 |
| 12 | -0.61 | -129.25 | -5.00 | 117.68 | -19.97 | 134.70 | -2.55 | -131.60 |
| 13 | -0.76 | -143.32 | -6.00 | 96.90 | -19.81 | 116.35 | -2.38 | -146.90 |
| 14 | -1.01 | -166.19 | -6.20 | 70.58 | -18.85 | 92.19 | -2.68 | -168.13 |
| 15 | -0.88 | 168.37 | -7.47 | 41.66 | -19.03 | 65.52 | -2.36 | 162.57 |
| 16 | -0.85 | 157.29 | -8.58 | 25.78 | -18.91 | 51.09 | -2.07 | 153.40 |
| 17 | -1.18 | 147.97 | -8.14 | 9.21 | -17.33 | 35.32 | -2.29 | 140.45 |
| 18 | -1.83 | 133.03 | -7.18 | -10.20 | -15.36 | 16.25 | -2.52 | 133.73 |
| 19 | -3.05 | 112.54 | -5.32 | -38.11 | -12.58 | -11.48 | -4.28 | 116.79 |
| 20 | -4.26 | 92.05 | -4.57 | -70.41 | -10.96 | -43.88 | -5.03 | 93.24 |


Typical Noise Parameters (V_{dd} = 5V, T_A = 25°C, 50 ohm)

| Freq (GHz) | F _{min} (dB) | Γ _{opt} Mag | Γ _{opt} Ang | R _n /Z ₀ |
|------------|-----------------------|----------------------|----------------------|--------------------------------|
| 2.0 | 2.95 | 0.086 | 49 | 0.52 |
| 2.5 | 2.32 | 0.12 | 90 | 0.29 |
| 3.0 | 1.83 | 0.15 | 122 | 0.19 |
| 3.5 | 1.54 | 0.18 | 174 | 0.18 |
| 4.0 | 1.53 | 0.22 | -145 | 0.17 |
| 4.5 | 1.61 | 0.24 | -103 | 0.21 |
| 5.0 | 1.78 | 0.27 | -62 | 0.22 |
| 5.5 | 2.05 | 0.30 | -35 | 0.32 |
| 6.0 | 2.22 | 0.33 | -7.8 | 0.37 |

Part Number Ordering Information


| Part Number | No. of Devices | Container |
|----------------|----------------|---------------|
| MGA-30989-BLKG | 100 | 7" Tape/Reel |
| MGA-30989-TR1G | 3000 | 13" Tape/Reel |

SOT89 Package Dimensions

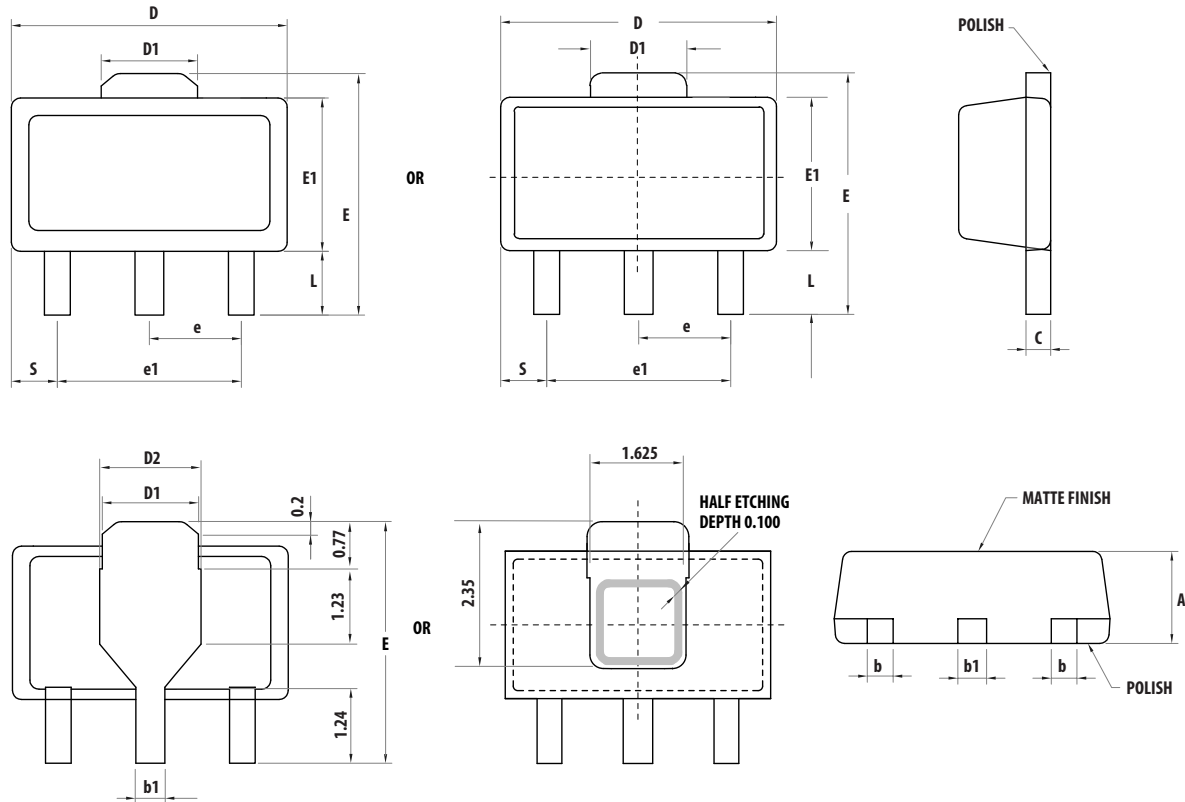


| Symbols | Dimensions in mm | | | Dimensions in inches | | |
|---------|------------------|---------|---------|----------------------|---------|---------|
| | Minimum | Nominal | Maximum | Minimum | Nominal | Maximum |
| A | 1.40 | 1.50 | 1.60 | 0.055 | 0.059 | 0.063 |
| L | 0.89 | 1.04 | 1.20 | 0.0350 | 0.041 | 0.047 |
| b | 0.36 | 0.42 | 0.48 | 0.014 | 0.016 | 0.018 |
| b1 | 0.41 | 0.47 | 0.53 | 0.016 | 0.018 | 0.030 |
| C | 0.38 | 0.40 | 0.43 | 0.014 | 0.015 | 0.017 |
| D | 4.40 | 4.50 | 4.60 | 0.173 | 0.177 | 0.181 |
| D1 | 1.40 | 1.60 | 1.75 | 0.055 | 0.062 | 0.069 |
| D2 | 1.45 | 1.65 | 1.80 | 0.055 | 0.062 | 0.069 |
| E | 3.94 | - | 4.25 | 0.155 | - | 0.167 |
| E1 | 2.40 | 2.50 | 2.60 | 0.094 | 0.098 | 0.102 |
| e1 | 2.90 | 3.00 | 3.10 | 0.114 | 0.118 | 0.122 |
| S | 0.65 | 0.75 | 0.85 | 0.026 | 0.030 | 0.034 |
| e | 1.40 | 1.50 | 1.60 | 0.054 | 0.059 | 0.063 |

Device Orientation

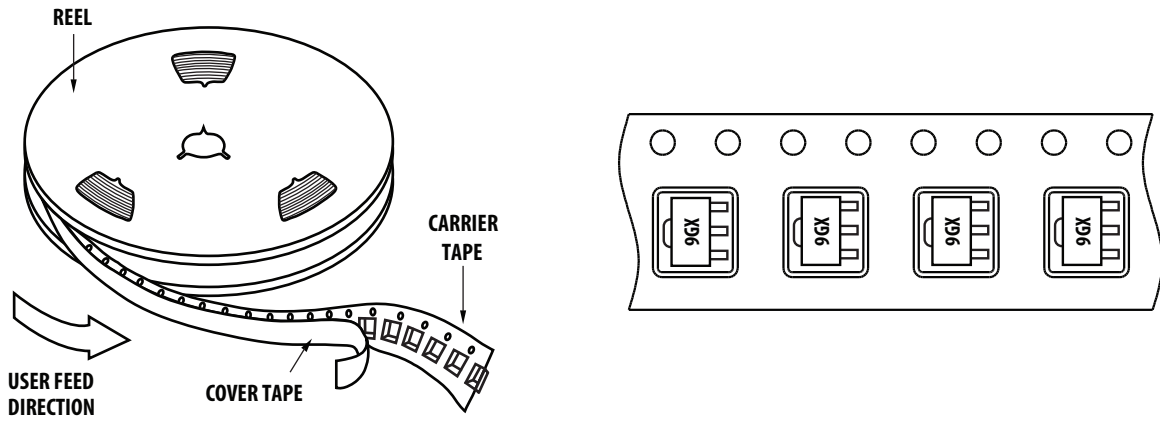

Tape Dimensions

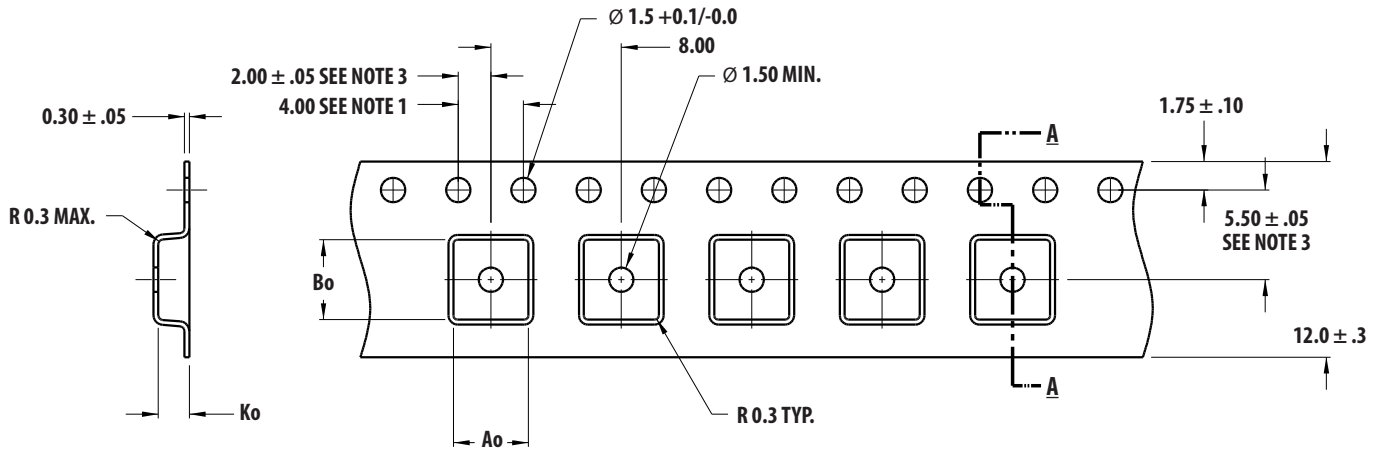

SECTION A - A


$A_o = 4.60$
 $B_o = 4.90$
 $K_o = 1.90$

DIMENSIONS IN MM

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

Reel Dimensions – 13" Reel

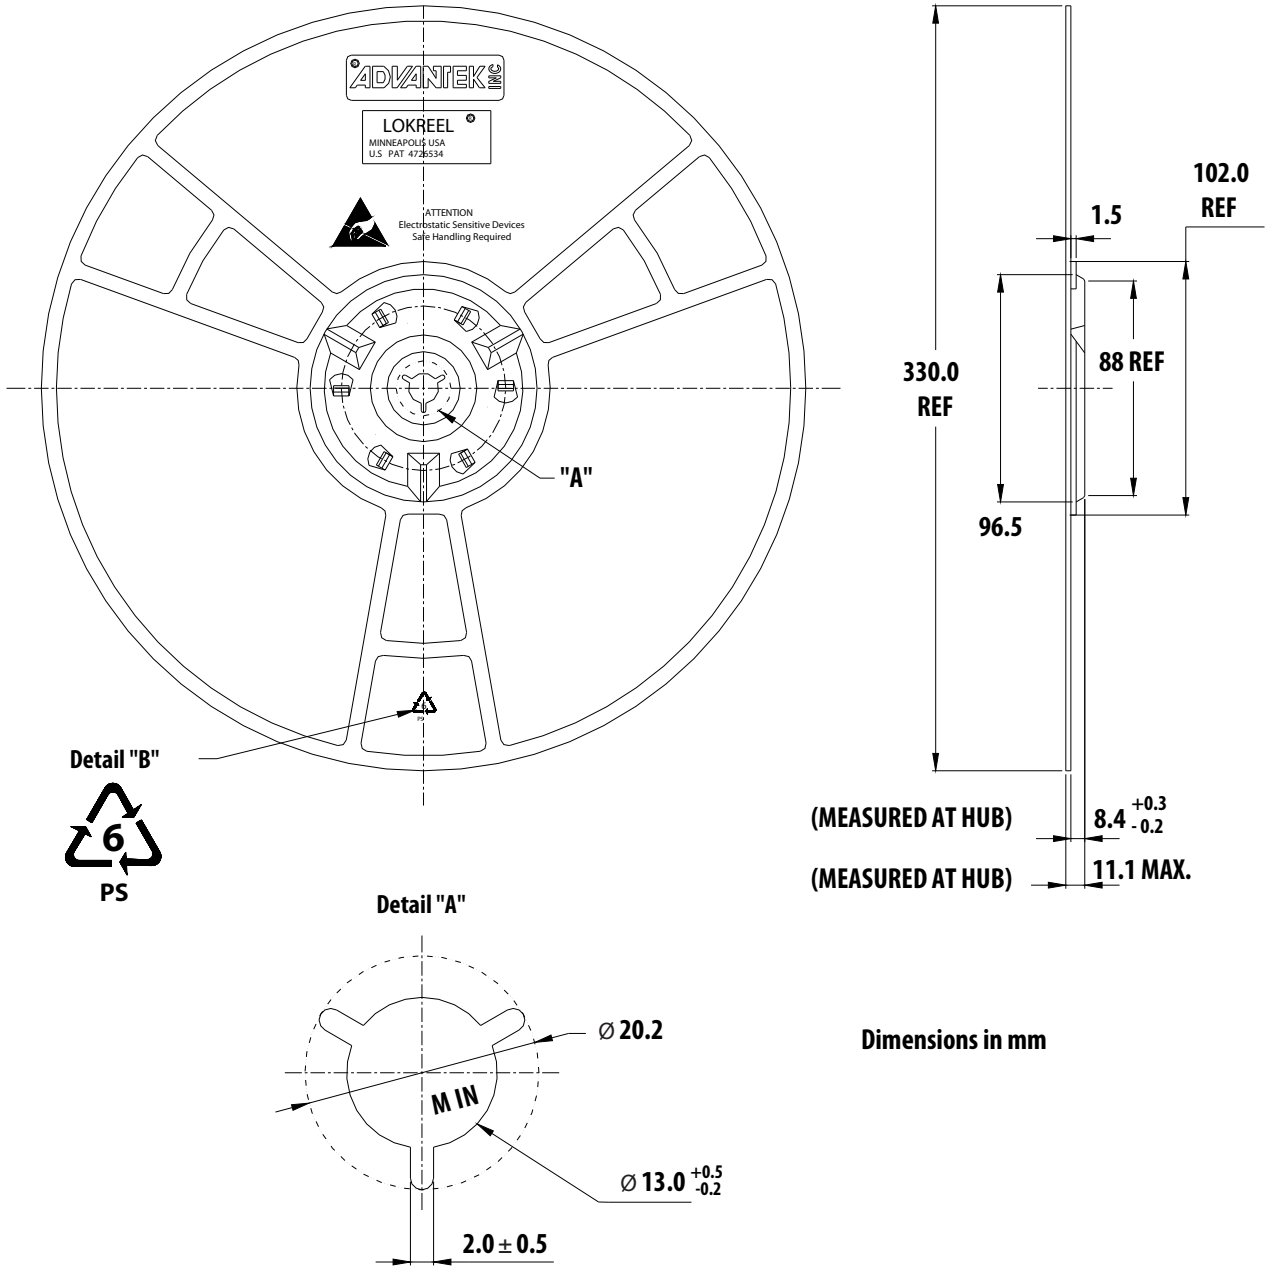

Dimensions in mm

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2013 Avago Technologies. All rights reserved. AV02-2251EN - November 11, 2013

