



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# MGV1207R82M-10





## PHYSICAL DIMENSIONS:

|   |       |   |      |
|---|-------|---|------|
| A | 13.50 | ± | 0.50 |
| B | 12.60 | ± | 0.30 |
| C | 6.20  | ± | 0.30 |
| D | 3.60  | ± | 0.50 |
| E | 2.30  | ± | 0.50 |

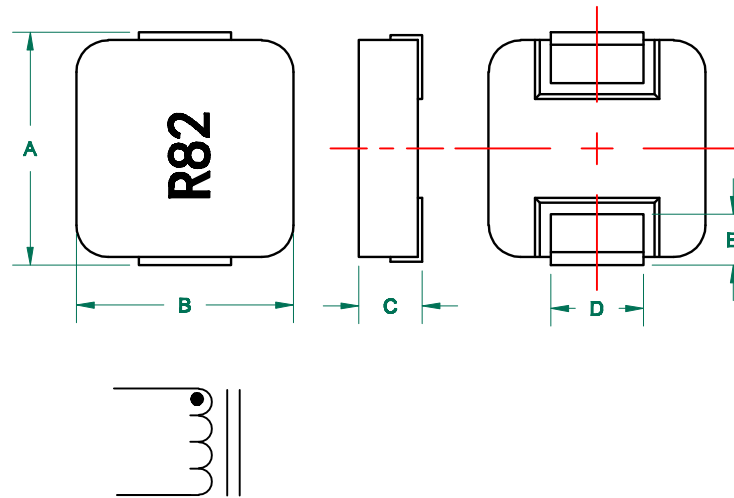

## LAND PATTERNS FOR REFLOW SOLDERING

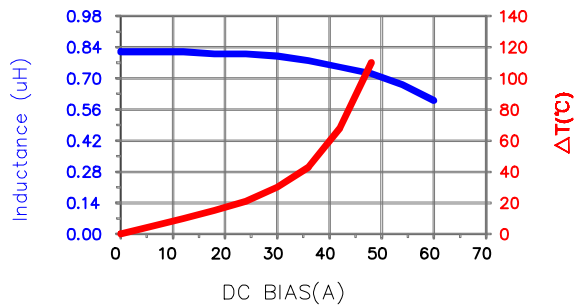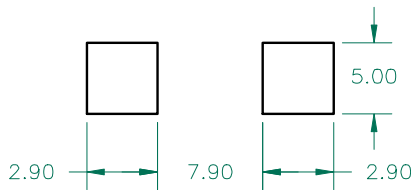

## ELECTRICAL SPECIFICATION @ 25°C

|                            | Min   | Nom  | Max    |
|----------------------------|-------|------|--------|
| INDUCTANCE (uH)            |       |      |        |
| L @ 100 KHz/0.25V<br>± 20% | 0.656 | 0.82 | 0.984  |
| DCR (Ω)                    |       |      | 0.0019 |

|   |      |
|---|------|
| Saturation Current <sup>3</sup><br>Isat (A)       | 50.0 |
| Temperature Rise<br>Current Irms <sup>4</sup> (A) | 33.0 |

## NOTES: UNLESS OTHERWISE SPECIFIED

- COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
- OPERATION TEMPERATURE RANGE:  
-40°C~+125°C (INCLUDING SELF-HEATING).
- SATURATION CURRENT Isat IS DEFINED AS MAXIMUM AMOUNT OF CURRENT BY WHICH INDUCTANCE WILL DROP BY TYPICAL VALUE OF 25% OF INITIAL INDUCTANCE (Ta=25±5°C).
- TEMPERATURE RISE CURRENT (Irms): DC CURRENT THAT CAUSES THE TEMPERATURE RISE (ΔT ≤ 40°C) FROM 25°C AMBIENT.

| DIMENSIONS ARE IN mm. |                |          |     | This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. |                | <b>Laird</b>     |  |
|-----------------------|----------------|----------|-----|---|----------------|------------------|--|
| PROJECT/PART NUMBER:  |                |          |     | REV   | PART TYPE      | DRAWN BY:        |  |
| MGV1207R82M-10        |                |          |     | A   | POWER INDUCTOR | QIU              |  |
| DATE:                 |                |          |     | SCALE:  | SHEET:         |                  |  |
| 06/26/13              |                |          |     | NTS   | 1 of 1         |                  |  |
| REV                   | DESCRIPTION    | DATE     | INT | CAD #   | TOOL #         |                  |  |
| A                     | ORIGINAL DRAFT | 06/26/13 | QIU |   |                |                  |  |
|                       |                |          |     |   |                | MGV1207R82M-10-A |  |