

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







MI1812K121R-10

UNCONTROLLED DOCUMENT


PHYSICAL DIMENSIONS:


± 0.25 [.010] A 4.50 [.177]

± 0.25 [.010] B 3.20 [.126]

± 0.25 [.010] C 1.40 [.055]

D 0.46 [.018] ± 0.20 [.008]

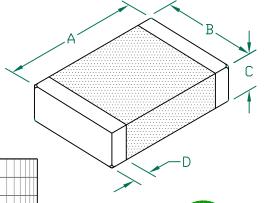

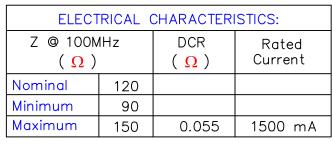


NOTES: UNLESS OTHERWISE SPECIFIED

- 1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 2500 PCS/REEL.
- 2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
- 3. TERMINATION FINISH IS 100% TIN.
- 4. OPERATING TEMP. RANGE: -40°C~+125°C. (INCLUDING SELF-HEATING)


Z vs FREQUENCY 200 --- 0mA 180 --- 250mA **1**60 - 500mA 140 --- 750mA **IMPEDANCE** 120 40 20 10 100 1000 10000

FREQUENCY (MHz)

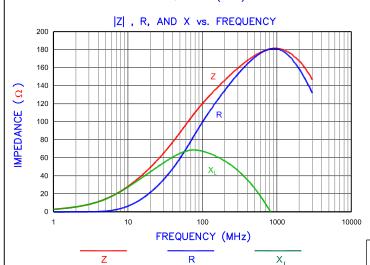


AGILENT E4991A RF Impedance/Material Analyzer HP 16194A Test Fixture. TEST REF. 6213

LAND PATTERNS FOR REFLOW SOLDERING



(For wave soldering, add 0.762 [.030] to this dimension.)

RECOMMENDED SOLDERING CONDITIONS

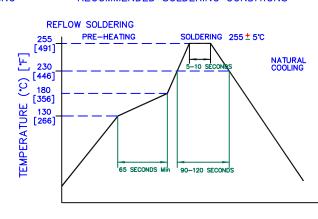

DIMENSIONS ARE IN INCHES (mm).				This print is the property of Laird				
				Tech. and is loaned in confidence subject to return upon request of	nd I	I _	=	T,
				with the understanding that no	""	[®] Laird		
				copies shall be made without the written consent of Laird Tech. Al	: I	LU		
				rights to design or invention are	' -			
D	ADD OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE	08/05/13	QU	reserved.				
				PROJECT/PART NUMBER:	REV	PART T	PE:	DRAWN BY:
С	UPDATE COMPANY LOGO	09/09/08	JRK	MI1812K121R-10	[) co-	-FIRE	JRK
В	UPDATE CURVES & COMPANY LOGO ADD ROHS	05/16/07	JRK	DATE: 04 /14 /04 S	CALE:	NTC	SHEET:	
Α	ORIGINAL DRAFT	04/14/04	JRK	04/14/04		NTS		
REV	DESCRIPTION	DATE	INT	CAD # MI1812K121R-10-D	OOL #	_	2	of 2