



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



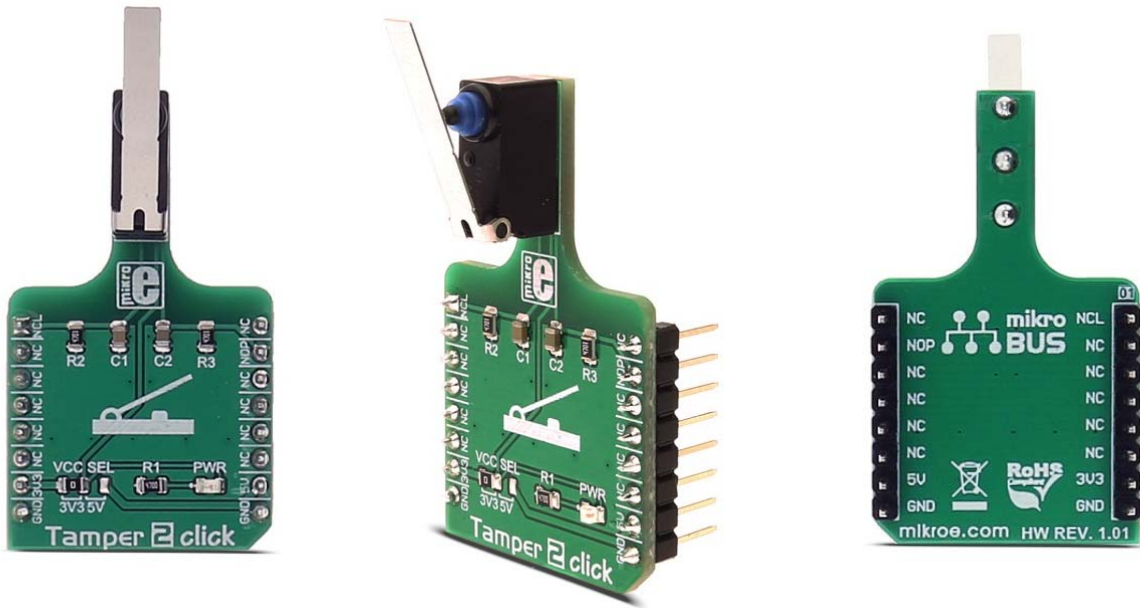

Tamper 2 click

PID: MIKROE-2552


Weight: 23 g

Tamper 2 click contains a levered D2HW-A221D switch by Omron, which outputs signal in both positions - pressed and released. Omron switches, also known as microswitches, are well renowned for their reliability and endurance. The PCB of this click is designed so that the lever of the microswitch is easily accessible, making the click useful for all kinds of different applications, where precise, two position switches are required. Both the NO (Normally Open) and NC (Normally Closed) pins of the microswitch are routed to mikroBUS™, so it can be easily connected to the microcontroller.

Switches of this kind are widely used in many different applications. The most common use of the Tamper 2 click is door opening or closing detection, detecting the end of travel of a linear actuator, a Morse code input device and so on.

How does it work?

Tamper 2 click contains a levered D2HW-A221D microswitch by Omron, specifically positioned on the board so it is easily accessible for interacting with various objects that could press the lever, activating the microswitch that way. The microswitch is actuated by applying very little physical force, using a tipping-point mechanism which results in fast and reliable snap-in action. It also has both NC and NO contacts routed to the mikroBUS™ so both states of the switch can be detected. Both lines are equipped with the RC filters, which serve as debouncing elements for the switch and also to pull down the lines when they are left afloat. This way, the contact bouncing is reduced even further, resulting in an accurate detection of the switching event.

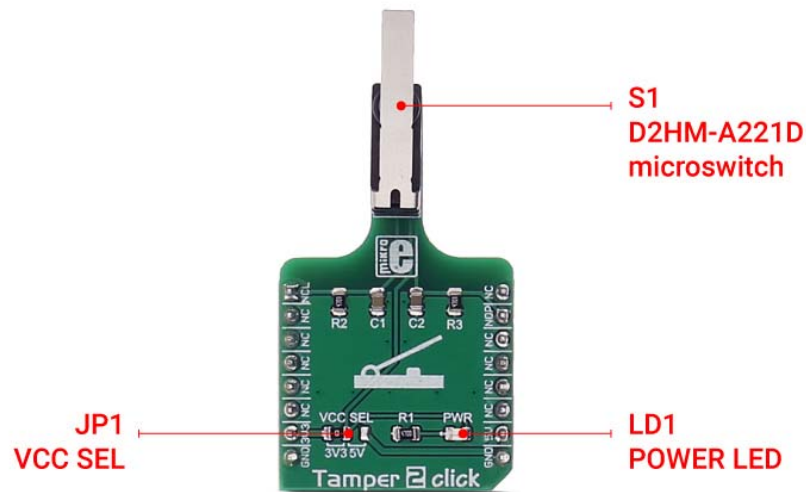

The switch itself is very durable and its rated up to 42VDC / 0.5A, also can endure a very high number of switching cycles – up to 1000000.

The click board™ also features an onboard jumper selector, which is used to select the voltage level that is connected to the microswitch input pin, making it usable for both 3V3 and 5V capable microcontroller pins.


Specifications

Type	Button
Applications	Door opening or closing detection, detecting the end of travel of a linear actuator, a Morse code input device, etc.
On-board modules	D2HW-A221D switch by Omron

Key Features	High-quality Omron microswitch, high mechanical and electrical durability, debouncing features
Interface	GPIO
Input Voltage	3.3V or 5V
Click board size	S (28.6 x 25.4 mm)

Pinout diagram

This table shows how the pinout on **Tamper 2 click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
Normally closed	NCL	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	NOP	Normally open
	NC	3	CS	RX	14	NC	
	NC	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	NC	
	NC	6	MOSI	SDA	11	NC	
Power supply	3V3	7	3.3V	5V	10	5V	Power supply
Ground	GND	8	GND	GND	9	GND	Ground

Tamper 2 click electrical specifications

Description	Min	Typ	Max	Unit
Contact resistance			100	mΩ
Mechanical durability (30 operations/min)			1 million	cycles
Electrical durability (20 operations/min)			10000	cycles

Onboard settings and indicators

Label	Name	Default	Description
JP1	VCC SEL	Left	Power supply voltage selection. Left position 3V3, right position 5V
LD1	Power LED		Power LED indicates that the click is powered on
S1	SWITCH		Onboard switch

Software support

We provide an example for the Tamper 2 click on our LibStock page, as well as a demo application (example), developed using MikroElektronika compilers. The demo can run on all the main MikroElektronika development boards.

Examples Description

The application is composed of three sections :

- System Initialization - Initializes UART module used for data logging
- Application Initialization - Initializes Tamper 2 click GPIO pins
- Application Task - Check the state of both GPIO pins and reports current state by logging information to UART

```
void Tamper_2_click_Task ()
{
    if (TAMPER_ON_STATE == 1)
    {
        UART0_Write_text("Tamper 2 click is in ON state\r\n");
    }

    if (TAMPER_OFF_STATE == 1)
    {
        UART0_Write_text("Tamper 2 click is in OFF state\r\n");
    }

    Delay_ms(500);
}
```

The example code for all architectures and compilers, and ready to use projects can be found on our LibStock page.

Other mikroE Libraries used in the example:

- UART

Additional notes and information

Depending on the development board you are using, you may need USB UART click, USB UART 2 click or RS232 click to connect to your PC, for development systems with no UART to USB interface available on the board. The terminal available in all MikroElektronika compilers, or any other terminal application of your choice, can be used to read the message.