



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Keylock click

PID: MIKROE-2564



Keylock click carries a processed sealed key lock mechanism that can be set in three different positions. The click is designed to run on either 3.3V or 5V power supply. It communicates with the target microcontroller over the PWM, INT, and AN pin on the mikroBUS™ line.

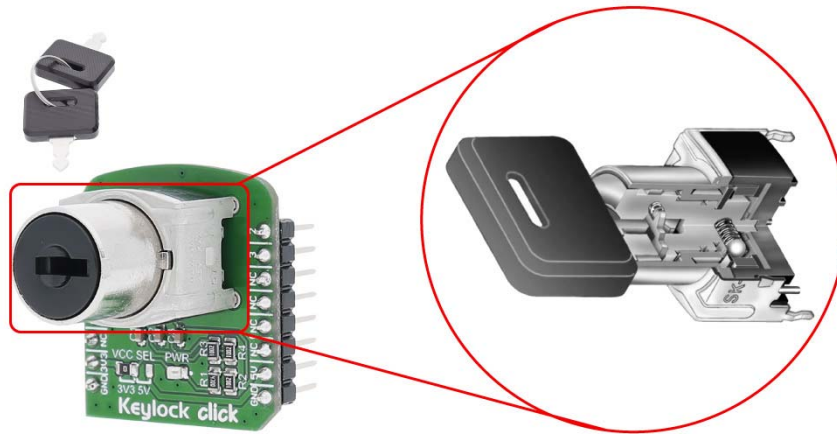

The key can be removed from the lock in any of the three positions. The package contains two keys and one protective cap.

Keylock features

The contact mechanism provides unequalled logic-level reliability and smoother, positive detent actuation.


Detent mechanism, with its spring-operated steel ball, gives crisp, positive action for accurate switch setting.

Specifications

Type	Joystick
Applications	Use the three different positions of the mechanism to turn applications on or off, for home security applications, for industrial equipment, etc.
On-board modules	Keylock switch with 3 positions
Interface	GPIO
Input Voltage	3.3V or 5V
Click board size	S (28.6 x 25.4 mm)

Pinout diagram

This table shows how the pinout on **Keylock click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
Output position 1	1	1	AN	PWM	16	2	Output position 2
	NC	2	RST	INT	15	3	Output position 3
	NC	3	CS	TX	14	NC	
	NC	4	SCK	RX	13	NC	
	NC	5	MISO	SCL	12	NC	
	NC	6	MOSI	SDA	11	NC	
Power supply	+3.3V	7	3.3V	5V	10	+5V	Power supply
Ground	GND	8	GND	GND	9	GND	Ground

Programming

Code examples for Keylock click, written for MikroElektronika hardware and compilers are available on Libstock.

Code snippet

This is a simple example of how Keylock click works, depending on the state of the Keylock click the appropriate position will be detected.

```
01 uint8_t state;
02 char txt[20];
03
04 void systemInit()
05 {
06     ANCON0 = 0x00;
07     ANCON1 = 0x00;
08     ANCON2 = 0x00;
09     UART1_Init(9600);
```

```

10 }
11
12 void Keylock_Init ()
13 {
14     KEYLOCK_STATE_1_Direction = 1;
15     KEYLOCK_STATE_2_Direction = 1;
16     KEYLOCK_STATE_3_Direction = 1;
17 }
18
19 void Keylock_Task ()
20 {
21     state = KEYLOCK_STATE_1*1 + KEYLOCK_STATE_2*2 + KEYLOCK_STATE_3*3;
22     UART1_Write_text ("Keylock is in state:");
23     IntToStr (state,txt) ;
24     UART1_Write_Text (txt);
25     UART1_Write_Text ( "rn" );
26     delay_ms (500);
27 }
28
29 void main ()
30 {
31     systemInit ();
32     Keylock_Init ();
33
34     while( 1 )
35     {
36         Keylock_Task ();
37     }
38 }

```



<https://shop.mikroe.com/keylock-click-9-29-17>