



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# MAC Address click

PID: MIKROE-2733




**MAC Address click** provides a unique node address for your application. It also has 1Kbit of writable EEPROM memory. MAC Address click carries the 24AA025E64 2K I2C Serial EEPROM with EUJ-64™ node identity. The click is designed to run on either 3.3V or 5V power supply. MAC Address click communicates with the target microcontroller over I2C interface.

## 24AA025E64 features

The Microchip Technology Inc. 24AA025E64 is a 2Kb Serial EEPROM with a pre-programmed IEEE EUI-64 MAC Address. The device is organized as two blocks of 128 x 8-bit memory with a 2-wire serial interface. Low voltage design permits operation down to 1.7V, with maximum standby and active currents of only 1 uA and 1 mA, respectively. The 24AA025E64 also has a page write capability for up to sixteen bytes of data.

## MEMORY ORGANIZATION

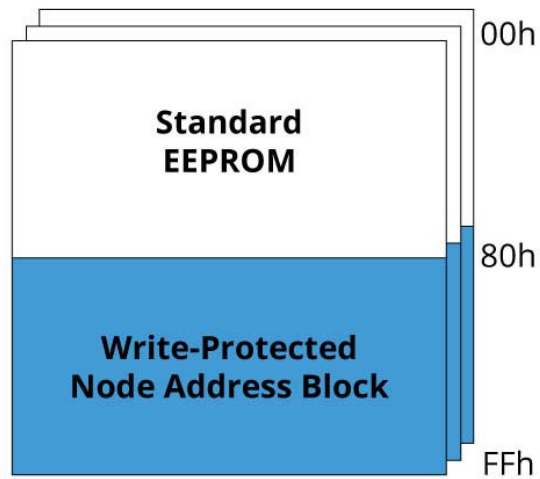


## Specifications

Type	EEPROM
On-board modules	24AA025E64 2K I2C Serial EEPROMs with EUI-64™ node identity from Microchip
Key Features	Pre-programmed globally unique, 64-bit node address; more than 1 Million erase/write cycles
Key Benefits	1Kbit of writable EEPROM memory
Interface	I2C
Input Voltage	3.3V or 5V
Click board size	S (28.6 x 25.4 mm)

## Pinout diagram

This table shows how the pinout on **MAC Address click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	NC	
	NC	3	CS	TX	14	NC	
	NC	4	SCK	RX	13	NC	
	NC	5	MISO	SCL	12	<b>SCL</b>	I2C clock
	NC	6	MOSI	SDA	11	<b>SDA</b>	I2C data
Power supply	<b>+3.3V</b>	7	3.3V	5V	10	<b>+5V</b>	Power supply
Ground	<b>GND</b>	8	GND	GND	9	<b>GND</b>	Ground

### Jumpers and settings

Designator	Name	Default Position	Default Option	Description
JP2	ADD SEL	Down	0	I2C slave address A0 (LSB) bit selection 0/1, down position 0, upper position 1.
JP3	ADD SEL	Down	0	I2C slave address A1 bit selection 0/1, down position 0, upper position 1.
PWR SEL	PWR SEL	Left	3.3V	Power Supply Voltage Selection 3V3/5V, left position 3V3, right position 5V

### Programming

Code examples for MAC Address click, written for MikroElektronika hardware and compilers are available on Libstock.

#### *Code snippet*

The following code reads one byte from EEPROM and transmits data to UART.

```
01 if( !MACADDRESS_readByte( loop, &read ) )
02 {
03     LOG( "rn Byte value [ " );
04     ByteToHex( read, txt );
05     Ltrim( txt );
06     LOG( txt );
07     LOG( " ] successfully read from [ " );
08     ByteToHex( loop, txt );
09     Ltrim( txt );
10     LOG( txt );
11     LOG( " ] address" );
12 }
13 else
14 {
15     LOG( "rn Read Byte Error" );
16 }
17 }
```