



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



UT-L 7-SEG R click


PID: MIKROE-2743

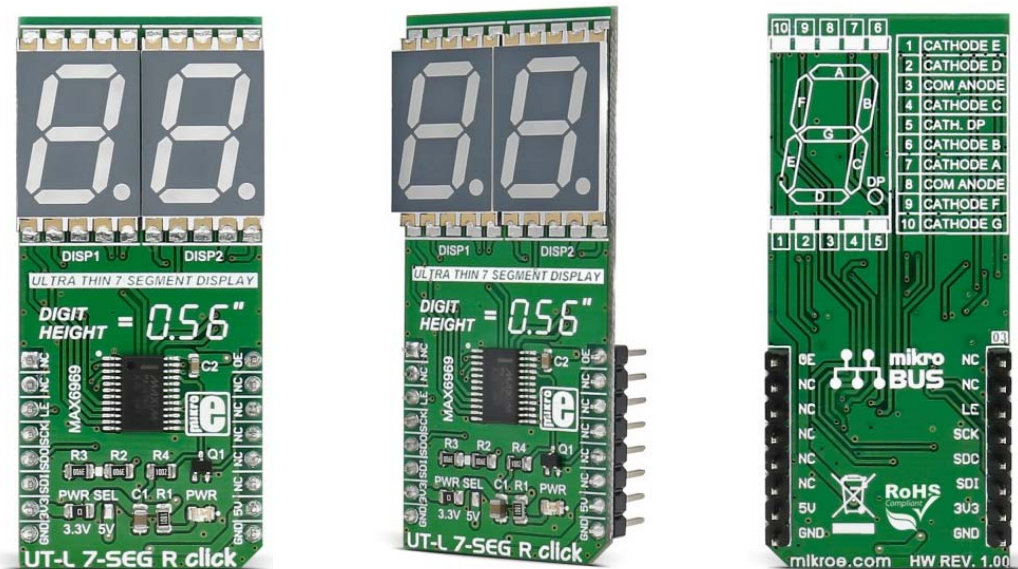

Add a double 7 segment display to your next project.

UT-L 7-SEG R click carries two SMD ultra thin (3.1mm) LED 7-SEG displays and the MAX6969 constant-current LED driver from Maxim Integrated. The click is designed to run on either 3.3V or 5V power supply. It communicates with the target microcontroller over SPI interface.

Display features

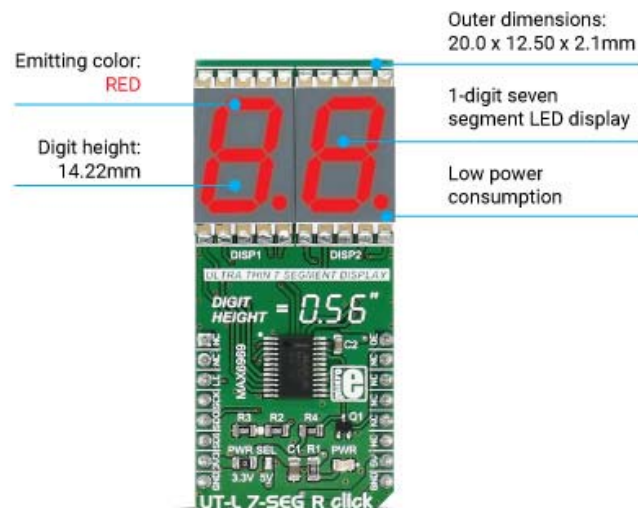

How the click works

The 7 segment displays are interfaced to the MCU over the MAX6969 16-port, constant-current LED driver IC.

It uses the common 4-wire serial bus for communication with MCU itself (LE, SCK, SDO, SDI on mikroBUS™ pin socket).

There is an additional OE (output enable) pin which is used to control the output driver state (enabled/disabled). Since it is the PWM output pin on the mikroBUS™ by default, the LED segments light intensity could be controlled by software too.

MAX6969 driver features

The MAX6969 uses the industry-standard, shift-register-plus-latch-type serial interface.


The driver accepts data shifted into a 16-bit shift register using data input DIN and clock input CLK. Input data appears at the DOUT output 16 clock cycles later to allow **cascading of multiple MAX6969s**. So, the IC allows you to connect multiple click boards™ - for applications that require more than two seven segment displays, such as digital clocks, temperature sensors, etc.

Specifications

Type	LED Segment
Applications	Displaying digits and letters on two 7 segment displays
Displays	DSM Series Ultra Thin Surface Mount Single Digit 7-Segment LED Display
On-board modules	MAX6969 6-Port, 5.5V Constant-Current LED Driver
Key Features	Excellent character appearance, low power consumption
Interface	GPIO,SPI
Input Voltage	3.3V or 5V
Click board size	L (57.15 x 25.4 mm)

Pinout diagram

This table shows how the pinout on **UT-L 7-SEG R click** corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	OE	PWM control of light intensity
	NC	2	RST	INT	15	NC	
Load-Enable input	LE	3	CS	TX	14	NC	
Clock input	SCK	4	SCK	RX	13	NC	
Serial Data Output	SDO	5	MISO	SCL	12	NC	
Serial Data Input	SDI	6	MOSI	SDA	11	NC	
Power supply	+3.3V	7	3.3V	5V	10	+5V	Power supply
Ground	GND	8	GND	GND	9	GND	Ground

Jumpers and settings

Designator	Name	Default Position	Default Option	Description
JP1	PRW.SEL.	Down	3V3	Power Supply Voltage Selection 3V3/5V, down position 3V3, up position 5V

Programming

Code examples for UT-L 7-SEG R click, written for MikroElektronika hardware and compilers are available on Libstock.

Code snippet

The following code snippet counts down from 99 to 0 on the displays of the UT-L 7-SEG R click.

```
01 sbit MAX6969_LE_PIN at RC2_bit;
02 sbit MAX6969_LE_PIN_Direction at TRISC2_bit;
03
04 uint16_t pwmPeriod;
05 static const uint8_t minus_char = 0x40;
06
07 void systemInit ()
08 {
09     AD1PCFG = 0xFFFF;
10     MAX6969_LE_PIN_Direction = 0;
11     SPI3_Init ();
12     pwmPeriod = PWM_Init (5000, 1, 1, 2);
13     PWM_Start (1);
14     PWM_Set_Duty (pwmPeriod/10, 1);
15
16 }
17
18 void MAX6969_Chip_Select ()
19 {
20     MAX6969_LE_PIN = 1;
21     asm nop
22     asm nop
23     asm nop
```

```

24     MAX6969_LE_PIN = 0;
25 }
26
27 static void U7SEG_Write(uint8_t number)
28 {
29     char numbers[10] = {0x3F, 0x06, 0x5B, 0x4F, 0x66, 0x6D, 0x7D, 0x07,
0x7F, 0x6F};
30     uint8_t tens = number / 10;
31     uint8_t ones = number % 10;
32     if (number > 99) return;
33
34     SPI_Wr_Ptr(numbers[ones]);
35     SPI_Wr_Ptr(numbers[tens]);
36 }
37
38 void main()
39 {
40     uint8_t counter;
41
42     systemInit();
43     counter = 100;
44
45     while(counter--)
46     {
47         U7SEG_Write(counter);
48         MAX6969_Chip_Select();
49         Delay_ms(500);
50     }
51
52     SPI_Wr_Ptr(minus_char);
53     SPI_Wr_Ptr(minus_char);
54     MAX6969_Chip_Select();
55 }

```