



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MINT1065

65W Single Output Series

Medical & ITE – Universal Input Power Supply



3 Year Warranty

- 65W Convection Cooled AC-DC Power Supply
- Universal Input 90-264 VAC
- Less than 0.5W No Load Power Dissipation
- Rugged EMC Compliant Design
- 2" x 4" x 1.2" Package
- Approved to EN/IEC/UL60601-1, 2nd Edition
- Approved to EN/IEC/UL60950-1, 2nd Edition
- Meets Efficiency Level IV Efficiency
- CE Compliant (LVD, RoHS)



International Safety Standard Approvals



Specifications

All Specifications are typical at nominal input, full load at 25°C unless otherwise stated.

AC Input 100-240VAC +/- 10%, 47-63 Hz single phase.	Turn On Time Less than 1 second under all rated load conditions.
Input Current 115VAC: 0.7A, 230VAC: 1.5A.	Hold-up Time <17 ms at 65W, nominal input (120VAC).
Inrush Current The inrush at 264VAC, at a cold start, will not exceed 40A.	Overvoltage Protection Built-in
Input Fuses F1, F2: 2.5A, 250VAC fuses provided on all models.	Overload Protection Hiccup Mode
Earth Leakage Current <300µA @ 264Vac, 60Hz, normal; <500µA SFC.	Short Circuit Protection Hiccup Mode
Efficiency Up to 90% typical.	Switching Frequency Variable 50-75kHz typical.
Output Power 65W continuous.	Medical Safety Standards EN/IEC/UL 60601-1, 2 nd Edition, EN/IEC/UL60950-1, 2 nd Edition
Ripple and Noise 1% pk-pk max., 20MHz BW, differential mode. Measured with noise probe directly across output terminals.	Isolation Input-Output: 4000VAC, Input-Ground: 1800VAC, Output-Ground: 500VAC
Output Voltage See chart.	Operating Temperature 0° to 70°C (derate from full rated power above 40°C).
Voltage Adjustability Voltage pre-set by fixed resistance.	Cooling Convection
Minimum Load Not required.	Output Power Derating See derating chart
Total Regulation +/- 2%. See chart.	Storage Temperature -40 to +85°C.
Transient Response 500µs max., 50% load step, typical.	Relative Humidity 5% to 95%, non-condensing

MINT1065

65W Single Output Series

Medical & ITE – Universal Input Power Supply



3 Year Warranty

Model Number	Volts (V)	Output Parameters			Total Regulation	OVP Threshold
		Open Frame	Output Current w/cover	Ripple & Noise		
MINT1065X1275C01	12V	5.25A	4.00A	120mV	±2%	15.0 ± 1.5V
MINT1065X1375C01	13.2V	4.80A	3.63A	140mV	±2%	16.0 ± 1.5V
MINT1065X1575C01	15V	4.33A	3.20A	150mV	±2%	18.0 ± 1.5V
MINT1065X1875C01	18V	3.50A	2.66A	180mV	±2%	21.0 ± 2.0V
MINT1065X2075C01	20V	3.25A	2.40A	200mV	±2%	23.0 ± 2.0V
MINT1065X2475C01	24V	2.70A	2.00A	240mV	±2%	27.0 ± 2.0V
MINT1065X4875C01	48V	1.35A	1.00A	480mV	±2%	55.0 ± 4.0V

Specifications (continued)

Vibration

Operating: 0.003 g²/Hz, 1.5 g_{rms} overall, 3 axes, 10 min. / axis

Non-Operating: 0.026 g²/Hz, 5.0 g_{rms} overall, 3 axes, 1 hr. / axis

Dimensions

W 2.0" x L 4.0" x H 1.17". See outline drawing.

Weight

150 grams

Shock

Operating: Half-sine, 20 g_{pk}, 10 ms, 3 axes, 6 shocks total

Non-Operating: Half-sine, 40 g_{pk}, 10 ms, 3 axes, 6 shocks total

Operating Altitude

-500 to 10,000 ft.

Non-operating Altitude

-500 to 40,000 ft.

EMI/EMC Compliance

Conducted Emissions	EN55011 Class B, FCC Part 15, Class B.
Radiated Emissions	EN55011 Class A, FCC Part 15, Class A.
Static Discharge Immunity	EN61000-4-2, 6kV Contact Discharge, 8kV air discharge
Radiated RF Immunity	EN61000-4-3, 3V/m.
EFT/Burst Immunity	EN61000-4-4, 2kV/5kHz..
Line Surge Immunity	EN61000-4-5, 1kV differential, 2kV common-mode
Conducted RF Immunity	EN61000-4-6, 3Vrms
Power Frequency Magnetic Field Immunity	EN61000-4-8, 3A/m
Voltage Dip Immunity	EN61000-4-11 240VAC, 0%/0.5 cycle, 40%/5cycles, 70%/25 cycles

Model Number Key

MINT 1 065 X 12 75 C 01

01 = Standard Model, 02 and higher indicates a modified model.

Input Connector - "C" = 2 pin header

"75" = Output Connector - 4 pin header

Output Voltage: "12" = 12V output, "24" = 24V output, etc.

Model Configuration: "A" = Class I (grounded); "B" = Class II (ungrounded); "C" =

Chassis/cover provided (class I only)

Output Power (Watts) - "065" = 65W

of Outputs

Product Family: "M" = Medical, "I" = Internal, "NT" = New Technology

MINT1065

65W Single Output Series

Medical & ITE – Universal Input Power Supply



3 Year Warranty

Mechanical Drawings and Connector Information

MINT1065 Series Connectors

INPUT:

J1 AMP P/N 641937-1

PIN 1) AC LINE

PIN 2) AC NEUTRAL

OUTPUT:

J2 AMP P/N 640445-4

PIN 1) +Vout PIN 3) -Vout

PIN 2) +Vout PIN 4) -Vout

MATING CONNECTORS:


P1 Molex 09-50-3031

P2 Molex 09-50-3041

Pins: Molex 08-50-0105

GND CONNECTION (Class I version)

0.187" FASTON TAB

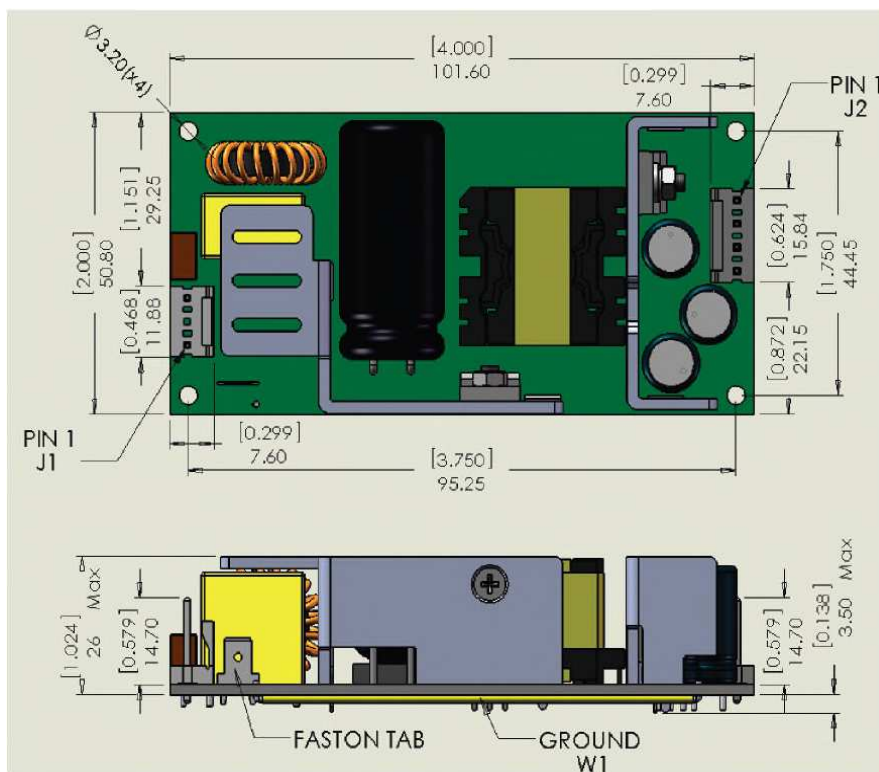

Output Power Derating Curve

