



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MIO-5250

Intel® Atom™ N2600/ D2550, 3.5"
MI/O-Compact SBC, DDR3, HDMI, Dual
LVDS, VGA, 2 GbE, CFast, iManager, MIOe

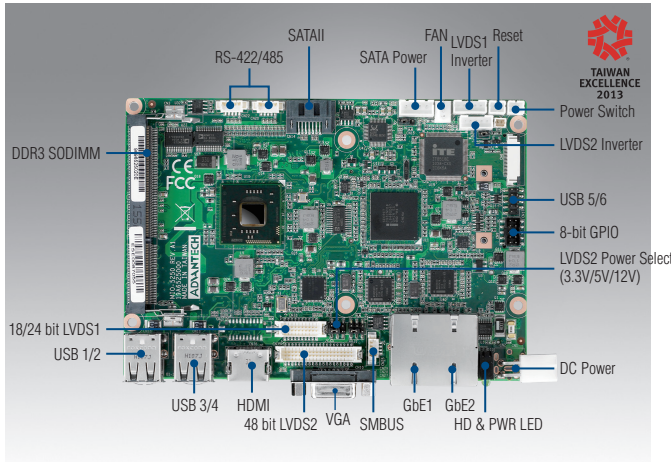

Features

- Embedded Intel® Atom™ N2600/ D2550 dual core processor + Intel NM10, 1 x DDR3 memory support up to 4 GB
- DirectX 9, multiple display: 18/24-bit LVDS1, 48-bit LVDS2, HDMI, VGA
- Flexible design using integrated multiple I/O: MIOe to approach vertical applications & keep domain knowhow.
- 2 GbE support, HD Audio, Rich I/O interface with 4 COM, 1 SATA, I²C or SMBus, 8-bit GPIO, PCIe Mini Card & CFast
- Supports iManager, SUSIAccess and Embedded Software APIs

Software APIs:



Utilities:




iManager susiAccess CE FCC

Specifications

Processor System	CPU	Intel Atom Dual Core processor N2600 1.6GHz/ D2550 1.86GHz
	Frequency	Dual-Core 1.6GHz/ 1.86GHz
	L2 Cache	1MB
	System Chipset	Intel Atom N2600/ D2550 + Intel NM10
	BIOS	AMI EFI 16Mbit
Memory	Technology	DDR3 800MHz (N2600), DDR3 1066 MHz (D2550)
	Max. Capacity	4 GB
	Socket	1 x 204-pin SODIMM
Display	Chipset	Integrated Intel GMA 3600 series
	Graphic Engine	DirectX 9 and OpenGL3.0 support HW Accelerated Decode: MPEG2, H.264, VC-1
	LVDS	18/24-bit LVDS1: up to 1366 x 768 (N2600), 1440 x 900 (D2550) 48-bit LVDS2: 1920 x 1200 (only for MIO-5250D-S8A1E)
	VGA	Up to 1920 x 1200
	HDMI	Supports 1920 x 1200, Max data rate: up to 1.65 Gb/s, Supports HDMI v1.3 Up to 1080p support
Ethernet	Multi-Display	VGA+LVDS, VGA+HDMI, HDMI+LVDS
	Speed	10/100/1000Mbps
	Controller	GbE1: Intel 82583V, GbE2: Intel 82583V
Audio	Connector	2 RJ45 on Rear I/O
	Chipsset	Realtek ALC892, High Definition Audio (HD), Line-in, Line out, Mic-in
WatchDog Timer	Amplifier	Optional via MIOe
		Output System reset, Programmable counter from 1 ~ 255 minutes/ seconds
Storage	CFast	1
	mSATA	1 (Supports either mSATA or full size miniPCIe, selected by BIOS, default support miniPCIe)
	SATA	1, up to 3Gb/s (300 MB/s)
Rear I/O	Ethernet	2
	VGA	1
	HDMI	1
	USB	4 x USB 2.0
	LED	Power, HDD
	DC Jack	1 (MIO-5250N-S6A1E only)
Internal I/O	USB	2 x USB 2.0
	Serial	2 x RS-232 from COM1/4, 2 x RS-232/422/485 from COM2/3 with auto flow control (ESD protection for RS-232: Air gap ±15kV, Contact ±8kV) COM port speed up to 115K bps
	I ² C	1 (Shares with SMBus pin)
	SMBus	1
	GPIO	8-bit general purpose input/output
Expansion	MiniPCIe	1 x Full-size with SIM Holder
	MIOe	SMBus, 1 x USB2.0, LPC, 1 x PCIe x1, line out, DisplayPort (optional), +5 Vsb/+12 Vsb power, Power On, Rest
Power	Power Type	Single 12V DC power input
	Power Supply Voltage	Supports single 12V input, ± 10%
	Power Consumption (Typical)	MIO-5250N-S6A1E: 0.606 A @ 12 V (7.27 W) MIO-5250D-S8A1E: 0.829 A @ 12 V (9.95 W)
	Power Consumption (Max, test in HCT)	MIO-5250N-S6A1E: 0.729 A @ 12 V (8.75 W) MIO-5250D-S8A1E: 1.029 A @ 12 V (12.35 W)
	Power Management	ACPI
	Battery	Lithium 3 V / 210 mAh
Environment	Operating	0 ~ 60 °C (32 ~ 140 °F) (Operating humidity: 40 °C @ 95% RH Non-Condensing)
	Non-Operating	-40 °C ~ 85 °C and 60 °C @ 95% RH Non-Condensing
Physical Characteristics	Dimensions (L x W)	146 x 102 mm (5.7" x 4"), same as 3.5"
	Weight	0.74 kg (1.63 lb), weight of total package
	Total Height	Top Side: 20 mm (including heatsink); Bottom Side: 9 mm; PCB: 1.6 mm

Block Diagram

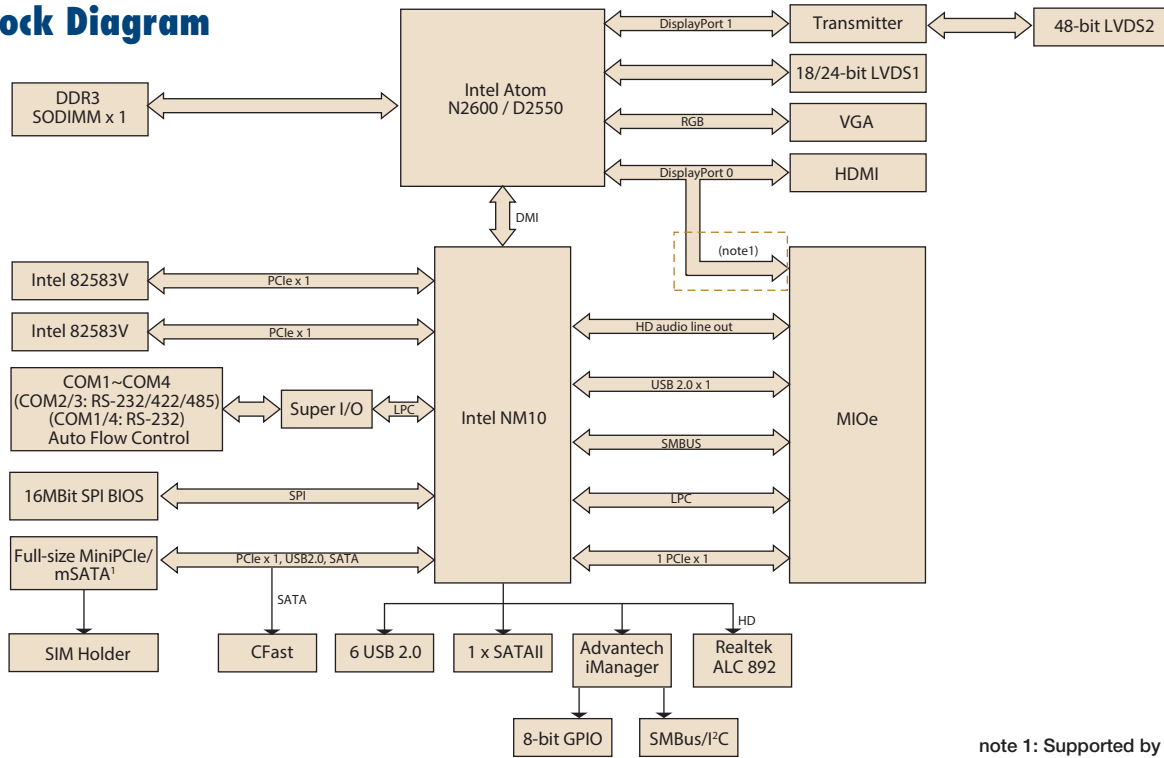

note 1: Supported by request

Ordering Information

Part No.	CPU	L2 Cache	Memory	LVDS1	LVDS2	VGA & HDMI	GbE	Audio	RS-232/422/485	RS-232	USB 2.0	SATAII	CFAST	Mini PCIe	MIOe	Power Connector	Thermal Solution	Operating Temp.
MIO-5250N-S6A1E	Intel Atom N2600 1.6G	1MB	SO-DIMM	24-bit	-	Yes	2	Yes	2	2	6	1	1	1	Yes	DC Jack	Passive	0 ~ 60 °C
MIO-5250D-S8A1E	Intel Atom D2550 1.86G	1MB	SO-DIMM	24-bit	48-bit	Yes	2	Yes	2	2	6	1	1	1	Yes	2x2 type	Passive	0 ~ 60 °C
MIO-5250NZ-2GS6A1E	Intel Atom N2600 1.6G	1MB	2GB bundle	24-bit	-	Yes	2	Yes	2	2	6	1	1	1	Yes	DC Jack	Passive	20 ~ 80 °C
MIO-5250NZ22GS6A1E	Intel Atom N2600 1.6G	1MB	2GB bundle	24-bit	-	Yes	2	Yes	2	2	6	1	1	1	Yes	DC Jack	Passive	40 ~ 85 °C
MIO-5250DZ22GS8A1E	Intel Atom D2550 1.86G	1MB	2GB bundle	24-bit	48-bit	Yes	2	Yes	2	2	6	1	1	1	Yes	2x2 type	Passive	40 ~ 85 °C

Note: Passive = fanless; Active = with fan
 Note: Wide temperature range version has been bundled with verified industrial-grade memory module

Packing List

Part No.	Description	Quantity
	MIO-5250 SBC	
	Startup Manual	
	Utility CD	
1700008941	SATA cable 7P 32CM C=R 180/180D W/Lock	1
1700018785	SATA 35cm power cable	1
1700019435	COM RS-485 D-SUB 9P (M)/1*5P 1.25 25cm cable	2
1701200220	COM RS232 Cable 2*10P-2.0/D-SUB 9P (M)*2 22CM	2
1700019584	Audio Cable 2*5P-2.0/JACK*3 20cm	1
9689000002	mini Jumper pack	1
1960054274T001	Heatsink 135 x 84.2 x 20 mm for MIO-5250	1

Optional Accessories

Part No.	Description
1960054269T001	Heat spreader for MIO-5250 (137 x 84.2 x 16.7mm)
1700006291	SATA2 cable 7P/ 7P 30cm C=R 180/90
1703100260	Internal USB cable
1757003934	Adaptor 100-240V 60W 12V 5A W/O PFC

Embedded OS/API

Embedded OS/API	Part No.	Description
Windows Embedded Standard 7	2070011953	WES7E MIO-5250 V5.1.4 ENG/GER/JPN/TC
	2070011955	WES7P MIO-5250 V5.1.3 EN/TC/SC/RU/FR/DE/ES/IT/JP/KR
Windows Embedded Standard		WES2009 (graphic driver support by case)
Windows Embedded Compact 7	2070012241	WEC7P MIO-5250 V1.0 ENG
VxWorks		6.9.2
Linux		Ubuntu 12.04 (graphic driver support by case)
Software API		iManager 2.0

Rear I/O View

