



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




IGBT Module

Single switch

Short Circuit SOA Capability
Square RBSOA

$I_{C80} = 1800 \text{ A}$
 $V_{CES} = 1700 \text{ V}$
 $V_{CE(sat) \text{ typ.}} = 2.3 \text{ V}$

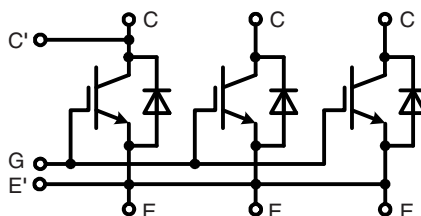

IGBT

Symbol	Conditions	Maximum Ratings		
V_{CES} V	$V_{GE} = 0 \text{ V}$	1700		
V_{GES} V		± 20		
I_{C80} A	$T_C = 80^\circ\text{C}$	1800		
I_{CM} A	$t_p = 1 \text{ ms}; T_C = 80^\circ\text{C}$	3600		
Symbol	Conditions	Characteristic Values		
t_{SC} μS	$V_{CC} = 1000 \text{ V}; V_{CEM \text{ CHIP}} = \leq 1700 \text{ V};$ ($T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)	min.	typ.	max.
$V_{CE(sat)}^*$	$V_{GE} \leq 15 \text{ V}; T_{VJ} \leq 125^\circ\text{C}$ $I_C = 1800 \text{ A}; V_{GE} = 15 \text{ V}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	2.3	2.6	V
$V_{GE(th)}$	$I_C = 240 \text{ mA}; V_{CE} = V_{GE}$	4.5		6.5 V
I_{CES}	$V_{CE} = 1700 \text{ V}; V_{GE} = 0 \text{ V}; T_{VJ} = 125^\circ\text{C}$			120 mA
I_{GES}	$V_{CE} = 0 \text{ V}; V_{GE} = \pm 20 \text{ V}; T_{VJ} = 125^\circ\text{C}$			500 nA
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	Inductive load; $T_{VJ} = 125^\circ\text{C};$ $V_{GE} = \pm 15 \text{ V}; V_{CC} = 900 \text{ V};$ $I_C = 1800 \text{ A}; R_G = 0.82 \Omega;$ $L_\sigma = 60 \text{ nH}$	285		ns
		230		ns
		950		ns
		240		ns
		530		mJ
		670		mJ
C_{ies} C_{oes} C_{res}		$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$	166	
	16.5			nF
	7.0			nF
Q_{ge}	$I_C = 1800 \text{ A}; V_{CE} = 900 \text{ V}; V_{GE} = \pm 15 \text{ V}$	15.1		μC
R_{thJC}				0.009 K/W

Features

- NPT³ IGBT
- Low-loss
- Smooth switching waveforms for good EMC
- Industry standard package
- High power density
- AISiC base-plate for high power cycling capacity
- AlN substrate for low thermal resistance

Typical Applications

- AC power converters for
 - industrial drives
 - windmills
 - traction
- LASER pulse generator

* Collector emitter saturation voltage is given at chip level

IXYS reserves the right to change limits, test conditions and dimensions.

20110119a

Diode

Symbol	Conditions	Maximum Ratings	
I_{F80}	$T_C = 80^\circ\text{C}$	1800	A
I_{FSM}	$V_R = 0\text{ V}; T_{VJ} = 125^\circ\text{C}; t_p = 10\text{ ms};$ half-sinewave	16500	A

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
V_F *	$I_F = 1800\text{ A}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.65		2.0 V
		1.70		V
I_{RM} t_{rr} Q_{RR} E_{rec}	$V_{CC} = 900\text{ V}; I_C = 1800\text{ A};$ $V_{GE} = \pm 15\text{ V}; R_G = 1.5\ \Omega; T_{VJ} = 125^\circ\text{C}$ Inductive load; $L_\sigma = 60\text{ nH}$	1470		A
		870		ns
		770		μC
		530		mJ
R_{thJC}				0.017 K/W

* Forward voltage is given at chip level

Module

Symbol	Conditions	Maximum Ratings	
T_{JM}	max. junction temperature	+150	$^\circ\text{C}$
T_{VJ}	Operating temperature	-40...+125	$^\circ\text{C}$
T_{stg}	Storage temperature	-40...+125	$^\circ\text{C}$
V_{ISOL}	50 Hz	4000	V~
M_d	Mounting torque	Base-heatsink, M6 screws	4 - 6 Nm
		Main terminals, M8 screws	8 - 10 Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
d_A	Clearance distance	terminal to base	23	mm
		terminal to terminal	19	mm
d_S	Surface creepage distance	terminal to base	33	mm
		terminal to terminal	33	mm
L_σ	Module stray inductance, C to E terminal		10	nH
$R_{term-chip}$ *)	Resistance terminal to chip		0.085	m Ω
R_{thCH}	per module; λ grease = 1 W/m \cdot K		0.006	K/W
Weight			1500	g

*) $V = V_{CE(sat)} + R_{term-chip} \cdot I_C$ resp. $V = V_F + R_{term-chip} \cdot I_F$

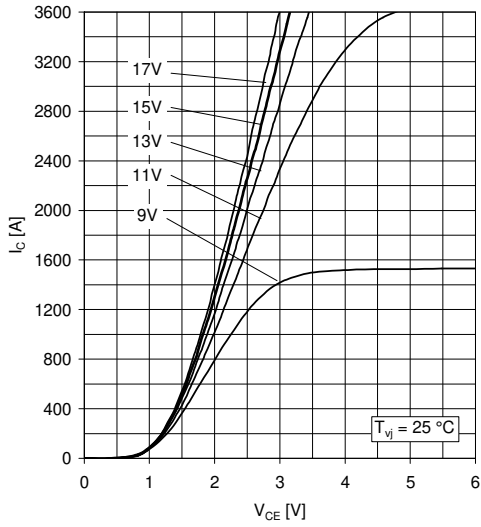


Fig. 1 Typical output characteristics, chip level

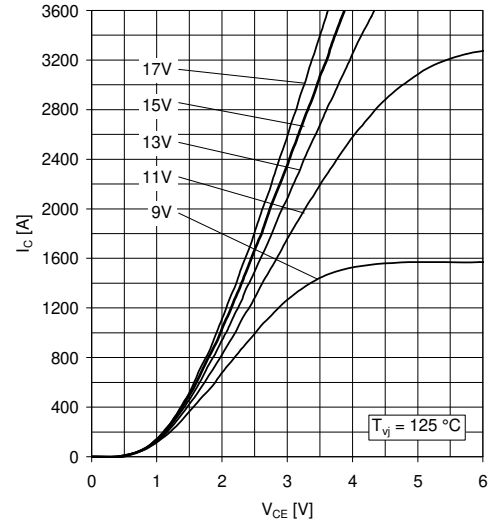


Fig. 2 Typical output characteristics, chip level

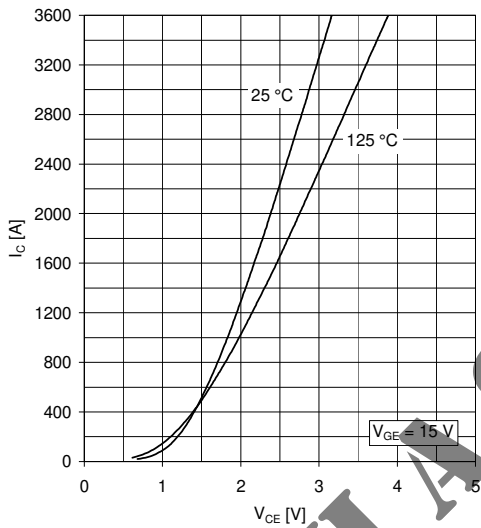


Fig. 3 Typical onstate characteristics, chip level

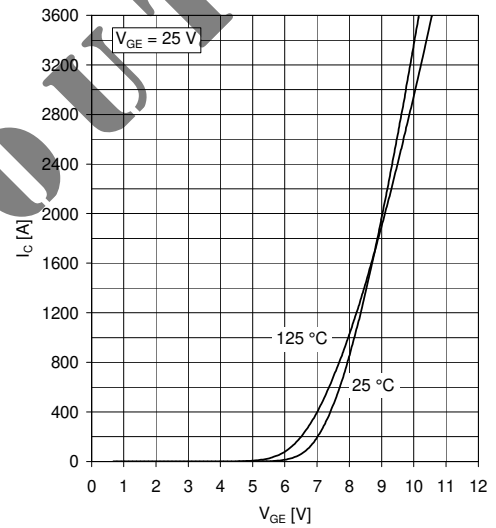


Fig. 4 Typical transfer characteristics, chip level

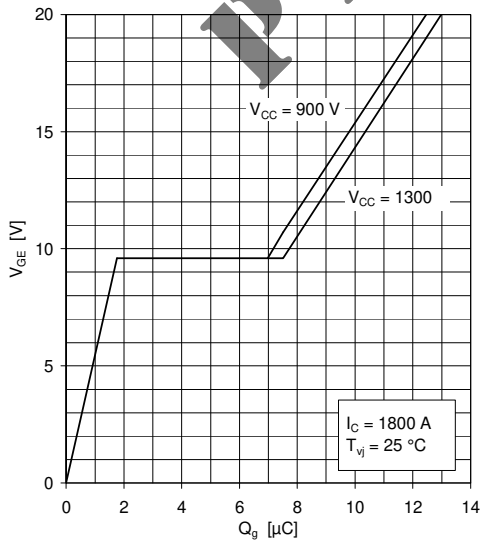


Fig. 5 Typical gate charge characteristics

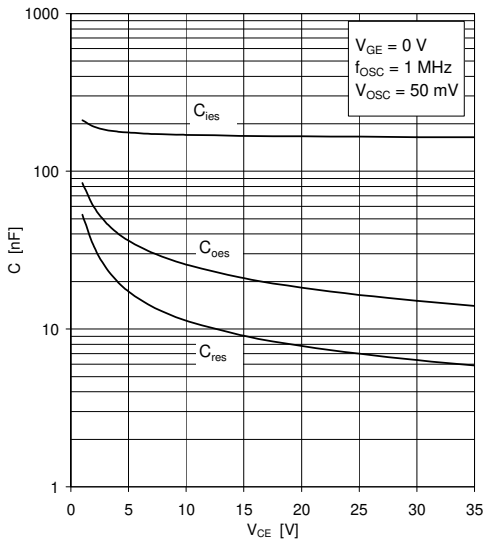


Fig. 6 Typical capacitances vs collector-emitter voltage

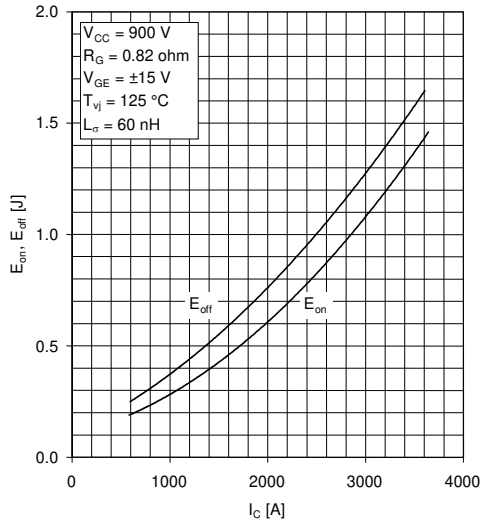


Fig. 7 Typical switching energies per pulse vs collector current

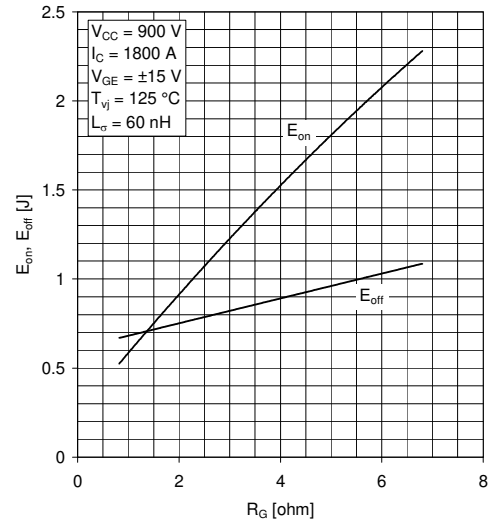


Fig. 8 Typical switching energies per pulse vs gate resistor

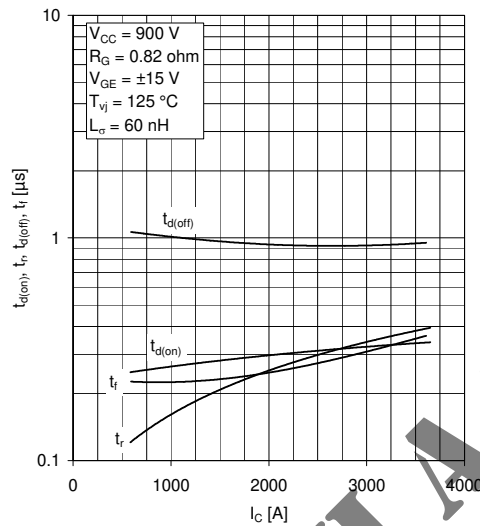


Fig. 9 Typical switching times vs collector current

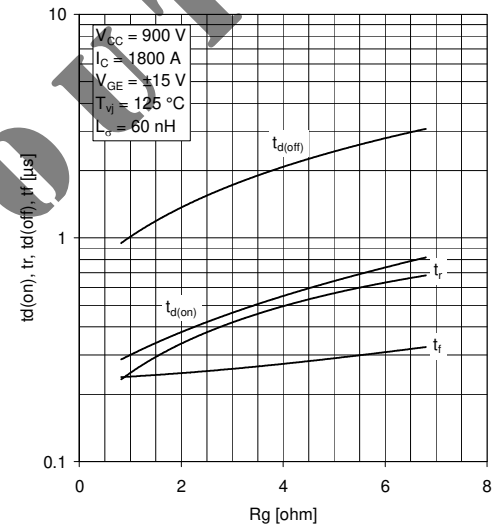


Fig. 10 Typical switching times vs gate resistor

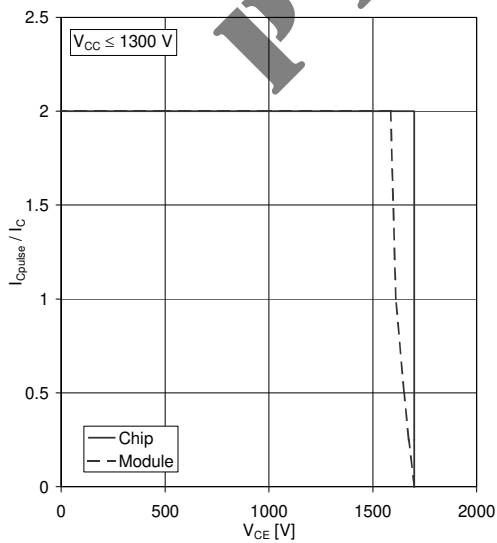


Fig. 11 Turn-off safe operating area (RBSOA)

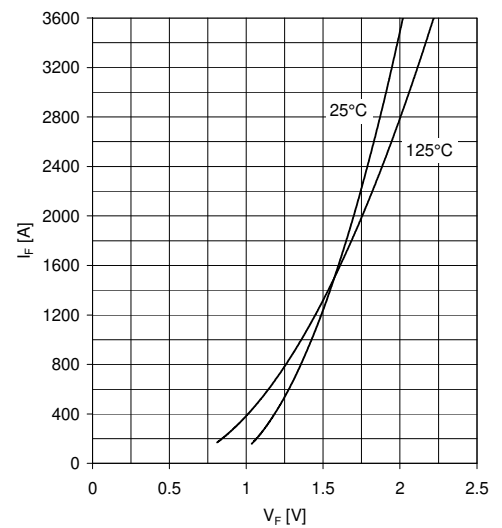


Fig. 12 Typical diode forward characteristics, chip level

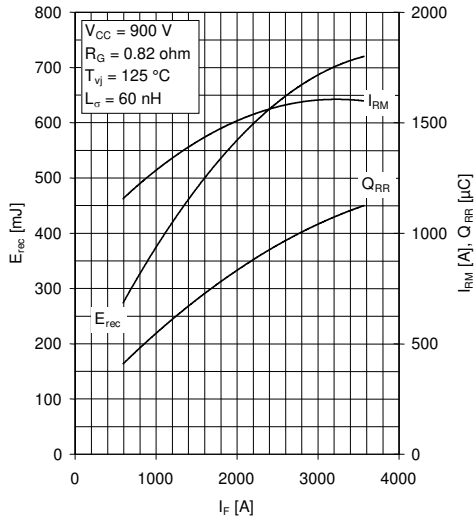


Fig. 13 Typical reverse recovery characteristics vs forward current

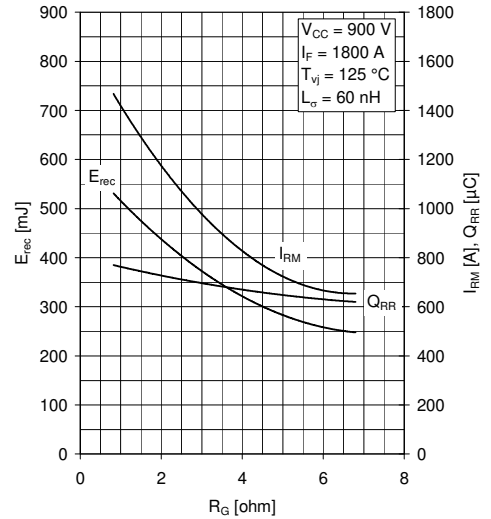


Fig. 14 Typical reverse recovery characteristics vs gate resistor


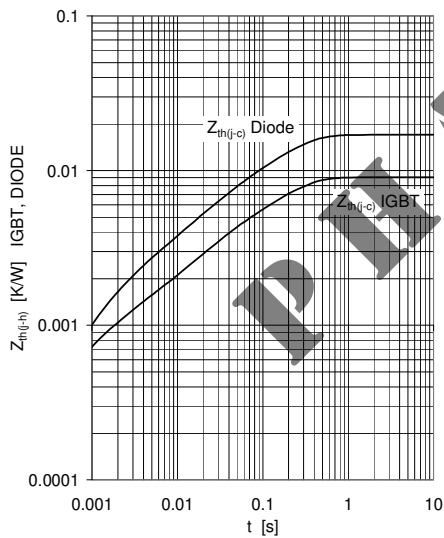


Fig. 15 Thermal impedance vs time

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

i	1	2	3	4	
IGBT	R _i (K/kW)	5.97	1.99	0.619	0.465
	τ _i (ms)	179	22	2.4	0.54
DIODE	R _i (K/kW)	11.1	3.36	1.27	1.34
	τ _i (ms)	189	30	7.4	1.4

Outline drawing

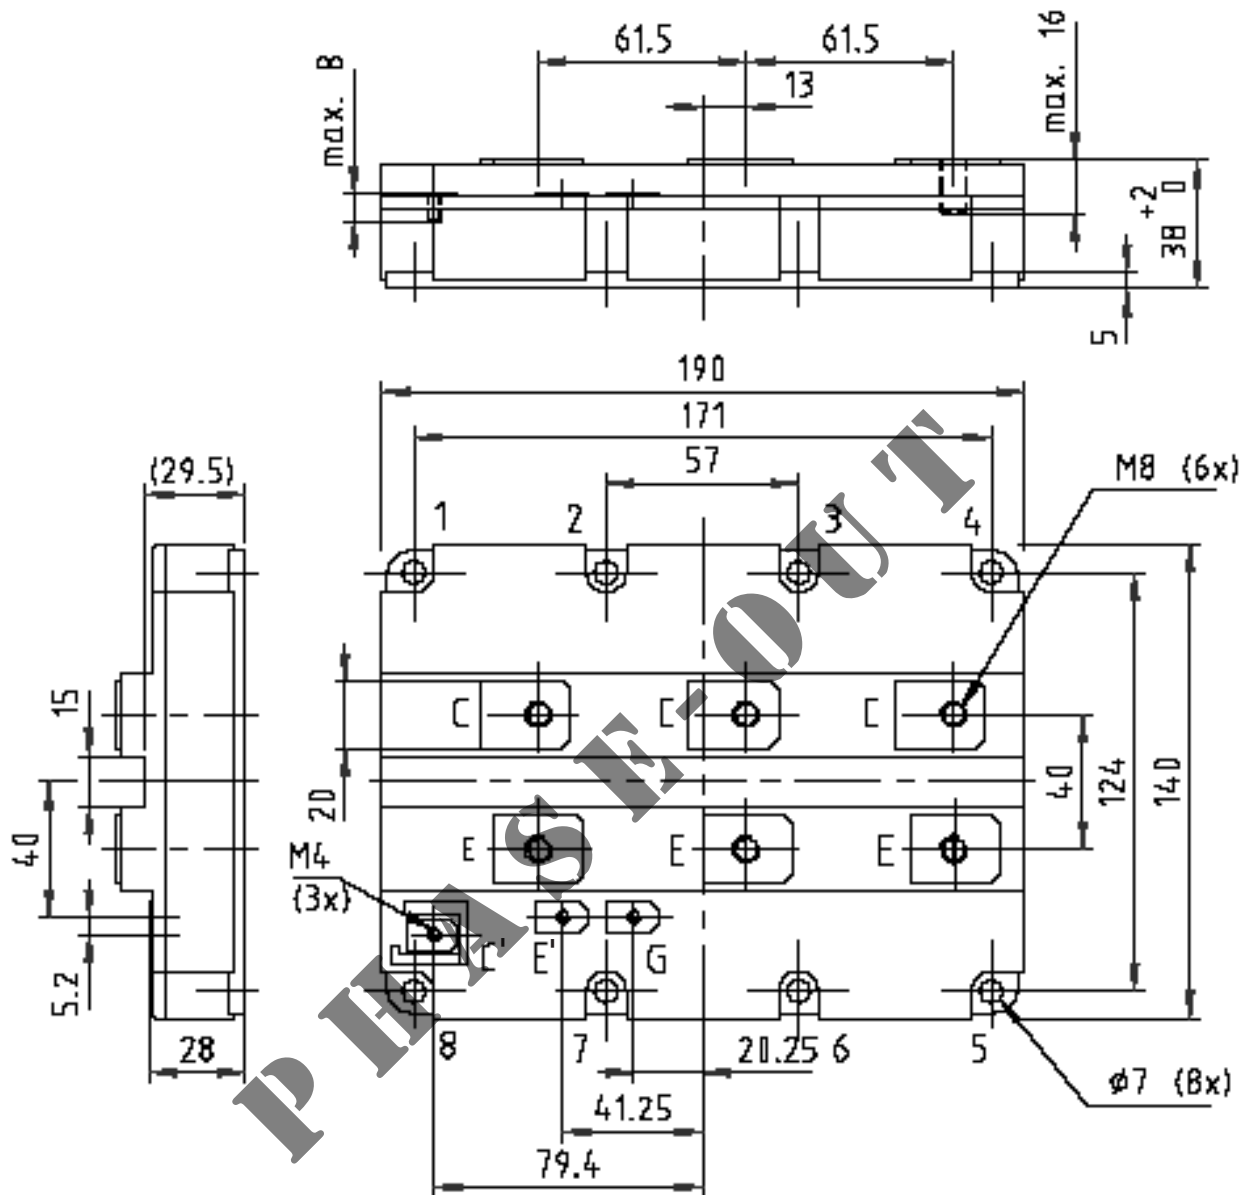

Note: all dimensions are shown in mm