



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




IGBT Module

Single switch

Short Circuit SOA Capability
Square RBSOA

I_{C80} = 600 A
 V_{CES} = 6500 V
 $V_{CE(sat) typ}$ = 4.2 V

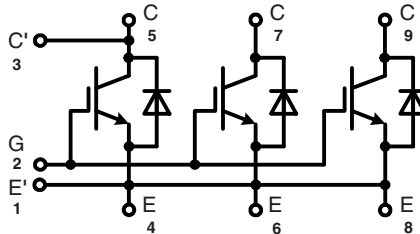

IGBT		
Symbol	Conditions	Maximum Ratings
V_{CES}	$V_{GE} = 0 V$	6500 V
V_{GES}		$\pm 20 V$
I_{C85}	$T_C = 85^\circ C$	600 A
I_{CM}	$t_p = 1 ms; T_C = 85^\circ C$	1200 A
t_{sc}	$V_{CC} = 4400 V; V_{CEM CHIP} \leq 6500 V;$ $V_{GE} \leq 15 V; T_{VJ} \leq 125^\circ C$	10 μs

Symbol	Conditions	Characteristic Values ($T_{VJ} = 25^\circ C$, unless otherwise specified)		
		min.	typ.	max.
$V_{CE(sat)} *$	$I_C = 600 A; V_{GE} = 15 V; T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		4.2 5.4	V V
$V_{GE(th)}$	$I_C = 240 mA; V_{CE} = V_{GE}$	6		8 V
I_{CES}	$V_{CE} = 6500 V; V_{GE} = 0 V; T_{VJ} = 125^\circ C$			120 mA
I_{GES}	$V_{CE} = 0 V; V_{GE} = \pm 20 V; T_{VJ} = 125^\circ C$			500 nA
$t_{d(on)}$	Inductive load; $T_{VJ} = 125^\circ C;$ $V_{GE} = \pm 15 V; V_{CC} = 3600 V;$ $I_C = 600 A; L_\sigma = 280 nH$	$R_G = 3.9 \Omega$	620	ns
t_r		$R_G = 3.9 \Omega$	270	ns
$t_{d(off)}$		$R_G = 2.7 \Omega$	1500	ns
t_f		$R_G = 2.7 \Omega$	930	ns
E_{on}		$R_G = 3.9 \Omega$	4250	mJ
E_{off}		$R_G = 2.7 \Omega$	3250	mJ
C_{ies}	$V_{CE} = 25 V; V_{GE} = 0 V; f = 1 MHz$		150	nF
C_{oes}			7.57	nF
C_{res}			1.46	nF
Q_{ge}	$I_C = 600 A; V_{CE} = 3600 V; V_{GE} = \pm 15 V$		9.65	μC
R_{thJC}				0.011 K/W

* Collector emitter saturation voltage is given at chip level

Features

- NPT³ IGBT
- Low-loss
- Smooth switching waveforms for good EMC
- Industry standard package
- High power density
- AISiC base-plate for high power cycling capacity
- AlN substrate for low thermal resistance

Typical Applications

- AC power converters for
 - industrial drives
 - windmills
 - traction
- LASER pulse generator

Diode			
Symbol	Conditions	Maximum Ratings	
I_{F80}	$T_C = 80^\circ\text{C}$	600	A
I_{FSM}	$V_R = 0\text{ V}; T_{VJ} = 125^\circ\text{C}; t_p = 10\text{ ms};$ half-sinewave	6000	A

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
V_F *	$I_F = 600\text{ A};$ $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	3.2		V
		3.4		V
I_{RM} t_{rr} Q_{RR} E_{rec}	$V_{CC} = 3600\text{ V}; I_C = 600\text{ A};$ $V_{GE} = \pm 15\text{ V}; R_G = 3.9\ \Omega; T_{VJ} = 125^\circ\text{C}$ Inductive load; $L_\sigma = 280\text{ nH}$	930		A
		2200		ns
		1150		μC
		2100		mJ
R_{thJC}			0.021	K/W

* Forward voltage is given at chip level

Symbol	Conditions	Maximum Ratings	
T_{JM}	max junction temperature	+125	$^\circ\text{C}$
T_{VJ}	Operating temperature	-40...+125	$^\circ\text{C}$
T_{stg}	Storage temperature	-40...+125	$^\circ\text{C}$
V_{ISOL}	50 Hz, 1 min	10200	V~
M_d	Mounting torque		
	Base-heatsink, M6 screws	4 - 6	Nm
	Main terminals, M8 screws	8 - 10	Nm
	Auxiliary terminals, M4 screws	2 - 3	Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
d_A	Clearance distance	terminal to base	40	mm
	IEC 60664-1/EN 50124-1	terminal to terminal	26	mm
d_S	Surface creepage dist.	terminal to base	64	mm
	IEC 60664-1/EN 50124-1	terminal to terminal	56	mm
V_E	Partial discharge extinction voltage $f = 50\text{ Hz}, Q_{pd} \leq 10\text{ pC}$ (IEC 61287)	5100		V
CTI	Comperative tracking index	600		
L_σ	Module stray inductance, C to E terminal		18	nH
$R_{term-chip}$ *	Resistance terminal to chip		0.12	m Ω
R_{thCH}	per module; λ grease = 1 W/m \cdot K		0.006	K/W
Weight			1760	g

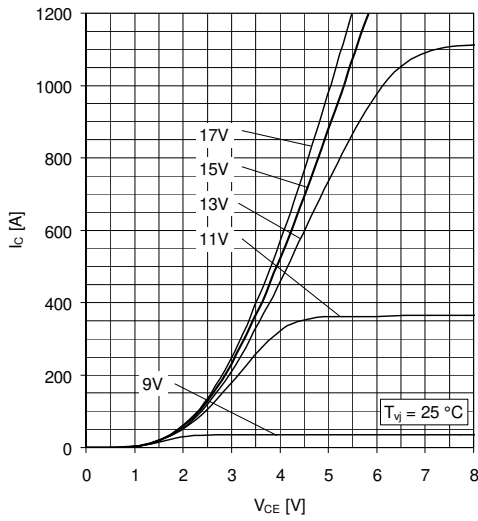


Fig. 1 Typical output characteristics, chip level

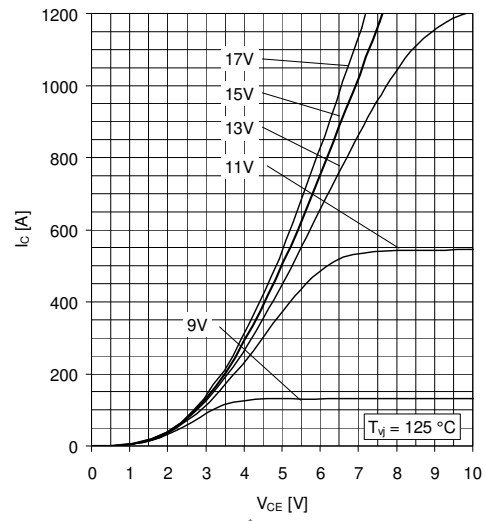


Fig. 2 Typical output characteristics, chip level

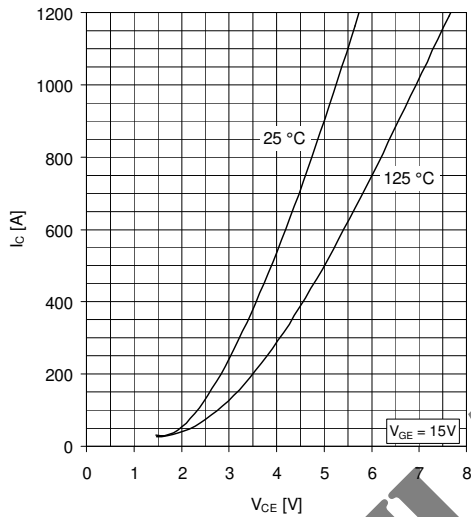


Fig. 3 Typical on-state characteristics, chip level

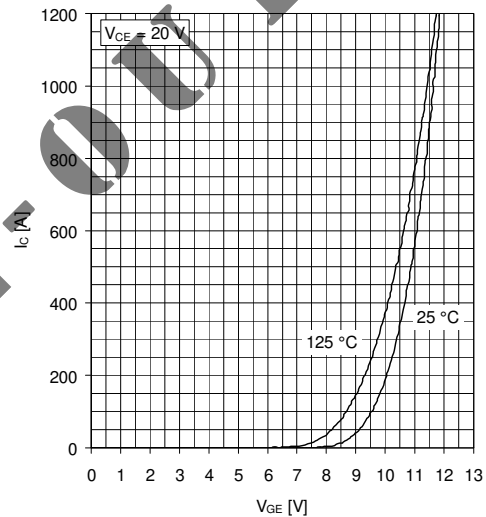


Fig. 4 Typical transfer characteristics, chip level

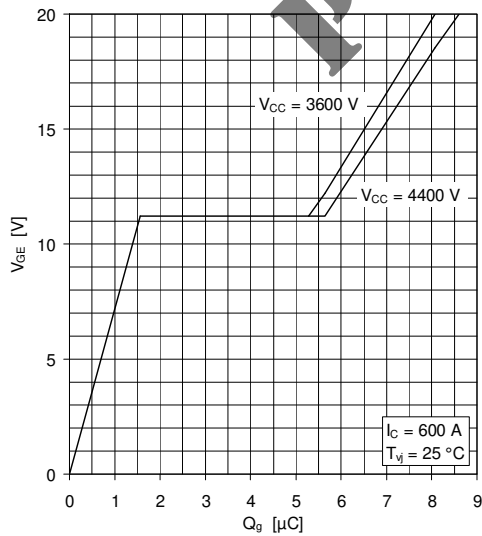


Fig. 5 Typical gate charge characteristics

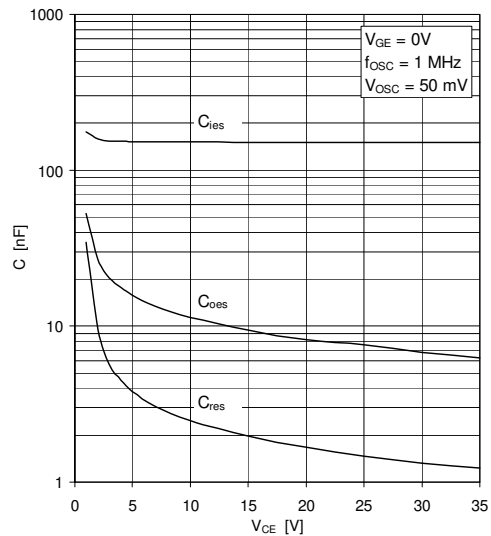


Fig. 6 Typical capacitances vs collector-emitter voltage

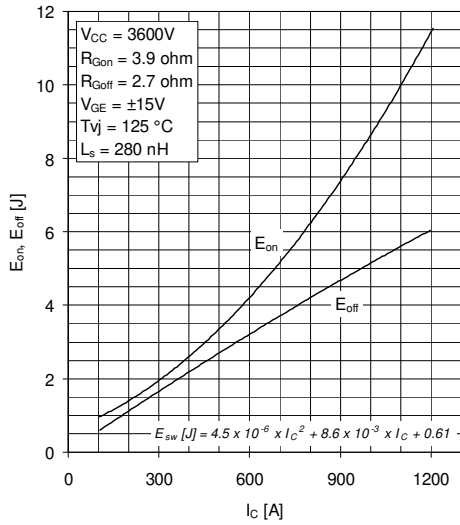


Fig. 7 Typical switching energies per pulse versus collector current

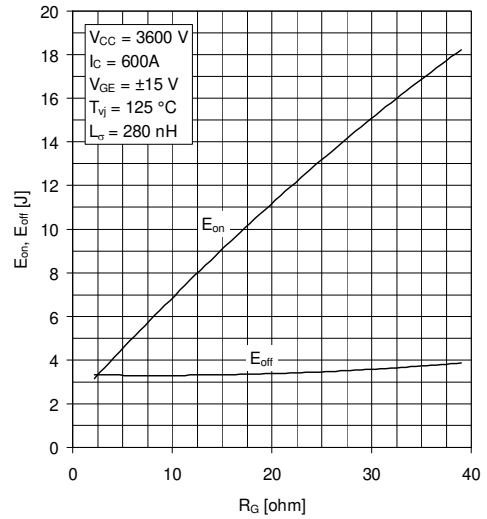


Fig. 8 Typical switching energies per pulse versus gate resistor

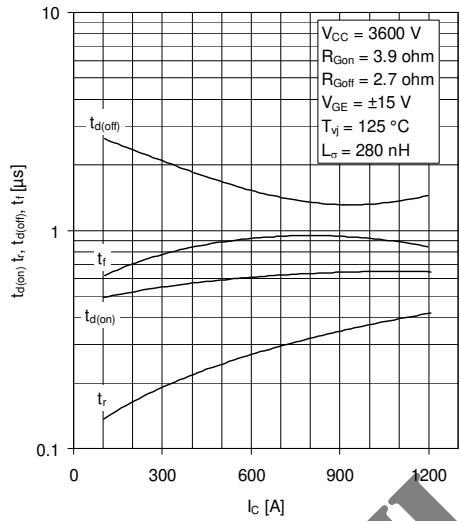


Fig. 9 Typical switching times vs. collector current

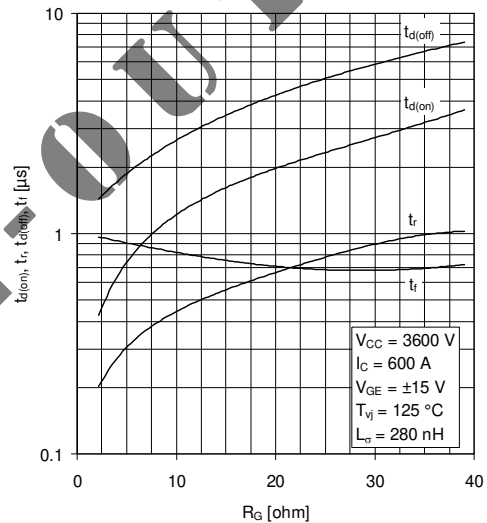


Fig. 10 Typical switching times vs. gate resistor

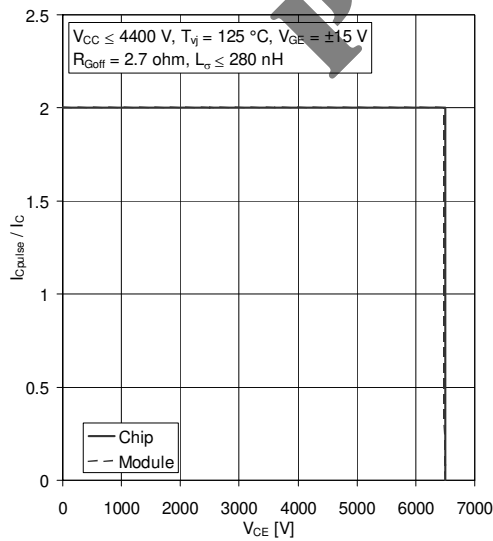


Fig. 11 Turn-off safe operating area (RBSOA)

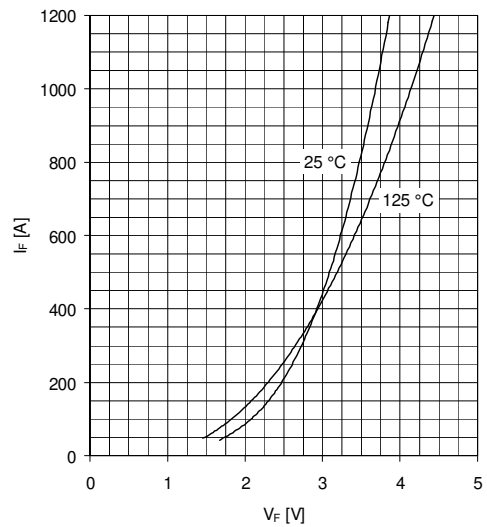


Fig. 12 Typ. diode forward characteristics, chip level

20110119a

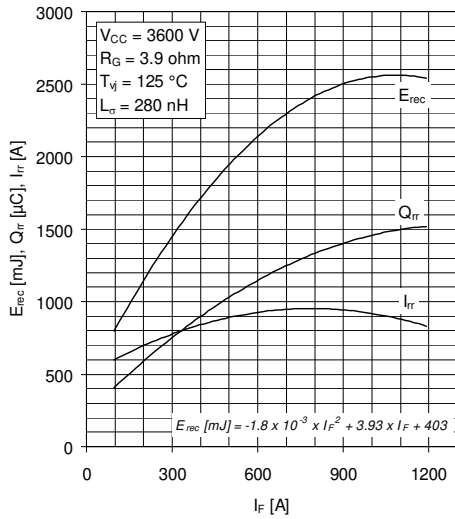


Fig. 13 Typ. reverse recovery characteristics versus forward current

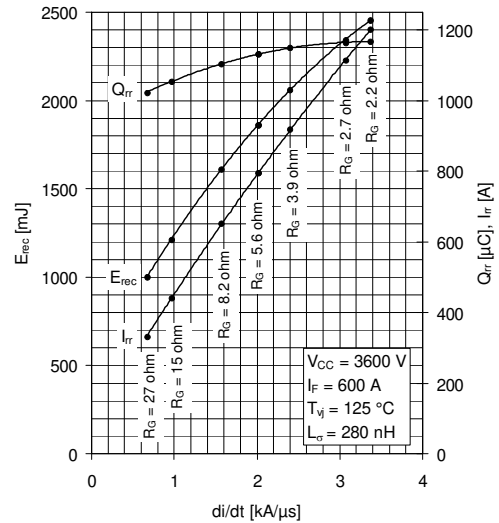


Fig. 14 Typ. reverse recovery characteristics versus di/dt

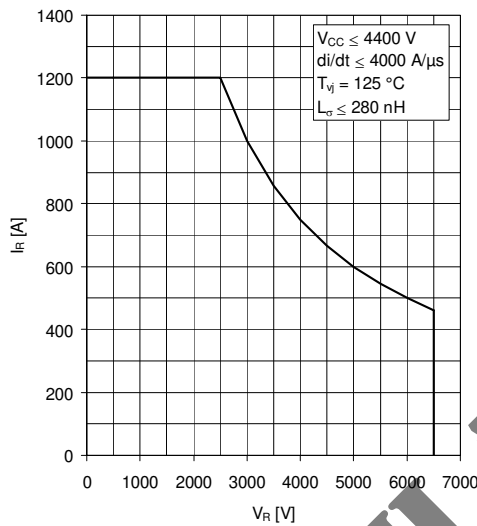


Fig. 15 Safe operating area diode (SOA)


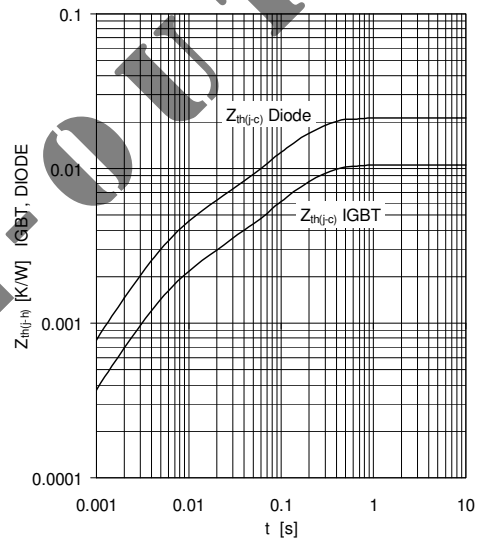


Fig. 16 Thermal impedance vs. time

Outline drawing

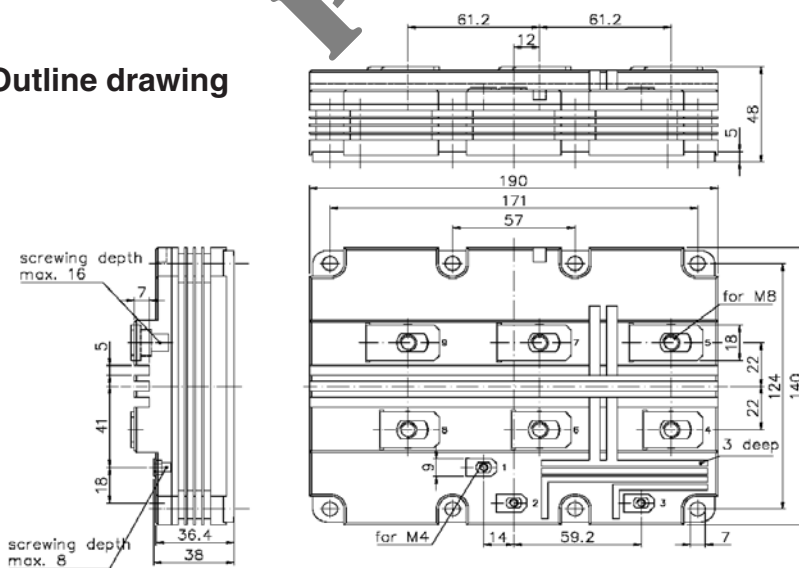

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

	i	1	2
IGBT	R_i [K/kW]	8.5	2
	t_i [ms]	151	5.84
DIODE	R_i [K/kW]	17	4.2
	t_i [ms]	144	5.83