



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MK23 Reed Sensors

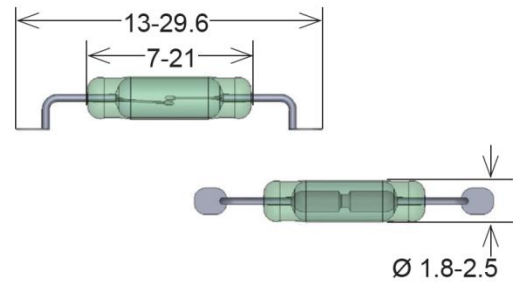

Values depend on switch model (xxx)

- Features: Miniature, Close Differential, Long Life Expectancy
- Applications: Air Conditioning, Gas Metering, Barcode Scanner, Security Panel, Water Flow Gauge & Others
- Markets: Automotive, Telecommunication, Security, Test & Measurement, Household, Medical & Others

Part Description: **M K 23 - 00 - X - 0**

Switch Model	Sensitivity	Lead Design
35, 46, 52, 66, 80, 85, 87, 90	B, C, D, E, F, G	1, 2, 4

Customer Options	Switch Model								Unit
	35	46	52	66	80	85	87	90	
Contact Data									
Rated Power (max.) Any DC combination of V&A not to exceed their individual max.'s	20	10	50	10	10	100	10	10	W
Switching Voltage (max.) DC or peak AC	200	200	350	200	170	1,000	200	175	V
Switching Current (max.) DC or peak AC	1.0	0.5	0.5	0.5	0.5	1.0	0.4	0.5	A
Carry Current (max.) DC or peak AC	1.25	1.0	2.5	1.0	0.5	2.5	0.5	1.0	A
Contact Resistance (max.) @ 0.5V & 10mA	150	150	150	150	200	150	150	150	mOhm
Breakdown Voltage (min.) According to EN60255-5	0.22	0.225	0.5	0.25	0.21	1.5	0.23	0.2	kVDC
Operating Time (max.) Incl. Bounce; Measured with 40% Overdrive	0.5	0.7	1.1	0.7	0.6	1.1	0.6	0.7	ms
Release Time (max.) Measured with no Coil Excitation	0.1	0.05	0.1	0.05	0.1	0.1	0.05	1.5	ms
Insulation Resistance (min.) RH < 45%, 100 V Test Voltage	10 ¹⁰	10 ⁹	10 ¹⁰	10 ¹⁰	10 ⁹	10 ¹⁰	10 ⁹	10 ⁹	Ohm
Capacitance (typ.) @ 10kHz across open Switch	0.3	0.3	0.5	0.3	0.2	0.5	0.2	1.5	pF

Series Datasheet – MK23 Reed Sensors

www.standexmeder.com

Dimensions (mm) and Lead Specifications	
Overall Length	13.0 – 29.6
Glass Length	7.0 – 21.0
Glass Dia.	1.8 - 2.75
Lead Dia.	0.3 to 0.6
Lead design 1	Flat, straight leads for PCB slot mounting
Lead Design 2	Flat, bent SMD leads (Gull-wing)
Lead Design 4	Round, bent SMD leads for PCB slot mounting


Environmental Data		Unit
Shock Resistance (max.) 1/2 sine wave duration 11ms	50	g
Vibration Resistance (max.)	20	g
Operating Temperature	-40 to 130	°C
Storage Temperature	-55 to 130	°C
Soldering Temperature (max.) 5 sec. max.	260	°C

Glossary		
Form A	NO = Normally Open Contacts SPST = Single Pole Single Throw	
Form B	NC = Normally Closed Contacts SPST = Single Pole Single Throw	
Form C	Changeover SPDT = Single Pole Double Throw	

Glossary Magnetic Sensitivity							
Sens.	A	B	C	D	E	F	G
AT	05-10	10-15	15-20	20-25	25-30	30-35	35-40



MK23 Reed Sensors

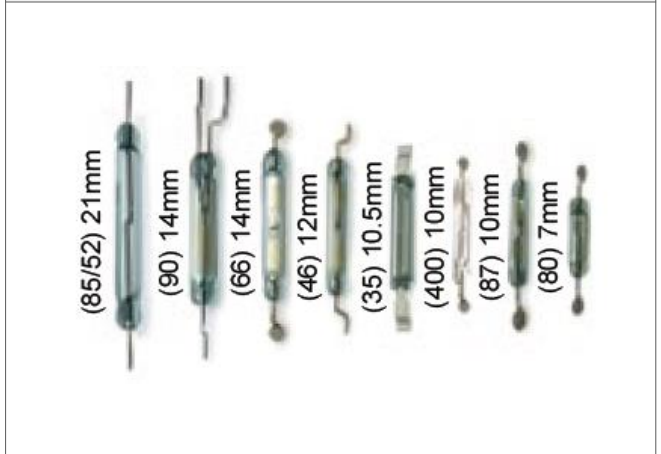

Handling & Assembly Instructions

- Use proper lead clamping or heat sinking techniques to prevent mechanical and/or heat stress during, soldering, and welding
- Mechanical shock as the result of dropping the reed sensor typically from a distance of greater than 12" may change it's magnetic sensitivity and/or destroy the sensor
- Series resistor recommended for >5m cable length

Life Test Data

*Load increase reduces life expectancy of Reed Switches

