



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Metallized Polypropylen (PP) Filter Capacitors in PCM 27.5 mm to 52.5 mm. Capacitances from 0.68 $\mu\text{F}$ to 75 $\mu\text{F}$ . Rate Voltages from 230 VAC to 440 VAC.

### Special Features

- High volume/capacitance ratio
- High peak current capabilities
- Self-healing
- Long lifetime
- According to RoHS 2011/65/EU

### Typical Applications

- For high frequency applications e.g.
- AC filtering in UPS systems
  - Harmonic filter
  - Welding equipment
  - Renewable energy - grid interface

### Construction


#### Dielectric:

Polypropylene (PP) film

#### Capacitor electrodes:

Vacuum-deposited

#### Internal construction:

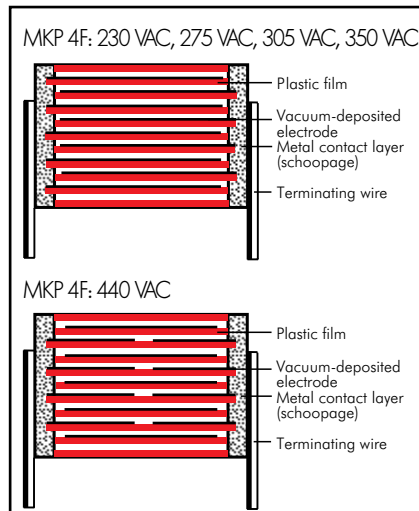

#### Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

#### Terminations:

Tinned wire.

#### Marking:

Colour: Red. Marking: Black.

### Electrical Data

#### Capacitance range:

0.68  $\mu\text{F}$  to 75  $\mu\text{F}$

**Rated voltages:** 230 VAC, 275 VAC, 305 VAC, 350 VAC, 440 VAC

#### Capacitance tolerances:

$\pm 20\%$ ,  $\pm 10\%$ ,  $\pm 5\%$

#### Operating temperature range:

$-55^\circ\text{C}$  to  $+105^\circ\text{C}$

#### Climatic test category:

55/105/56 in accordance with IEC

#### Insulation resistance at $+20^\circ\text{C}$ :

$\geq 30\,000$  sec ( $\text{M}\Omega \times \mu\text{F}$ )

Measuring voltage: 100 V/1 min.

#### Test voltage:

$1.5 U_{r,DC}$ , 10sec.

#### Test specifications:

In accordance with IEC 61071 and 60068

#### Dissipation factors at $+20^\circ\text{C}$ : $\tan \delta$

at f	PCM 27.5	PCM 37.5	PCM 52.5
1 kHz	$\leq 5 \times 10^{-4}$	$\leq 10 \times 10^{-4}$	$\leq 15 \times 10^{-4}$
10 kHz	$\leq 20 \times 10^{-4}$	$\leq 45 \times 10^{-4}$	$\leq 90 \times 10^{-4}$

Reference frequency 1 kHz in accordance with IEC 60384-1

#### Maximum pulse rise time:

PCM	max. pulse rise time V/ $\mu\text{sec}$ at $T_A < 40^\circ\text{C}$				
	230 VAC	275 VAC	305 VAC	350 VAC	440 VAC
27.5	45	55	68	100	110
37.5	20	30	35	50	70
52.5	10	13	15	25	40

for pulses equal to the rated voltage ( $U_{r,DC}$ )

### Mechanical Tests

#### Pull test on pins:

10 N in direction of pins according to IEC 60068-2-21

#### Vibration:

6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

#### Low air density:


1kPa = 10 mbar in accordance with IEC 60068-2-13

#### Bump test:

4000 bumps at 390  $\text{m}/\text{sec}^2$  in accordance with IEC 60068-2-29

#### Voltage derating:

A voltage derating factor must be applied according to the graph:

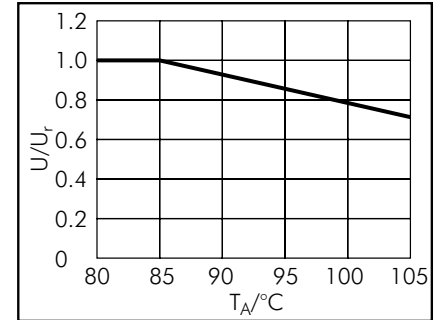

#### Reliability:

Operational life > 60000 hours at  $U_r$   
Failure rate < 10 fit ( $0.5 \times U_r$  and  $40^\circ\text{C}$ )

### Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

## Continuation

### General Data

Capacitance	W	H	L	PCM**	Pin	230 VAC*/450 VDC		Part number
						$I_s$ A	$I_{rms}$ (10 kHz) at 85° C A	
1.0 $\mu$ F	9	19	31.5	27.5	2	45	2.5	MKPF3Y41006A_____
1.5 "	11	21	31.5	27.5	2/4	70	3	MKPF3Y41506B_____
2.2 "	11	21	31.5	27.5	2/4	100	3.5	MKPF3Y42206B_____
3.3 "	13	24	31.5	27.5	2/4	150	5	MKPF3Y43306D_____
4.7 "	15	26	31.5	27.5	2/4	210	7.5	MKPF3Y44706F_____
6.8 "	17	29	31.5	27.5	2/4	300	8.5	MKPF3Y46806G_____
10 $\mu$ F	20	39.5	31.5	27.5	2/4	450	11.5	MKPF3Y51006J_____
	19	32	41.5	37.5	2/4	200	8	MKPF3Y51007F_____
12 "	19	32	41.5	37.5	2/4	240	10	MKPF3Y51207F_____
15 "	20	39.5	41.5	37.5	2/4	300	12	MKPF3Y51507G_____
20 "	24	45.5	41.5	37.5	2/4	400	14	MKPF3Y52007H_____
22 "	24	45.5	41.5	37.5	2/4	440	15	MKPF3Y52207H_____
25 "	31	46	41.5	37.5	2/4	500	17	MKPF3Y52507I_____
30 "	31	46	41.5	37.5	2/4	600	19	MKPF3Y53007I_____
	25	45	57	52.5	2/4	300	15	MKPF3Y53009D_____
35 "	35	50	41.5	37.5	2/4	700	20.5	MKPF3Y53507J_____
	25	45	57	52.5	2/4	350	15	MKPF3Y53509D_____
40 "	30	45	57	52.5	2/4	400	17.5	MKPF3Y54009E_____
45 "	30	45	57	52.5	2/4	450	18.5	MKPF3Y54509E_____
50 "	35	50	57	52.5	4	500	21	MKPF3Y55009F_____
55 "	35	50	57	52.5	4	550	22	MKPF3Y55509F_____
60 "	45	55	57	52.5	4	600	23	MKPF3Y56009H_____
65 "	45	55	57	52.5	4	650	25.5	MKPF3Y56509H_____
70 "	45	55	57	52.5	4	700	26	MKPF3Y57009H_____
75 "	45	65	57	52.5	4	750	27	MKPF3Y57509J_____


\* AC voltages:  $f \leq 100$  Hz

\*\* PCM = Printed circuit module = pin spacing


Dims. in mm.

Part number completion:	
Version code:	2-pin = 00
	4-pin = D4
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 148.	

#### 2-pin version

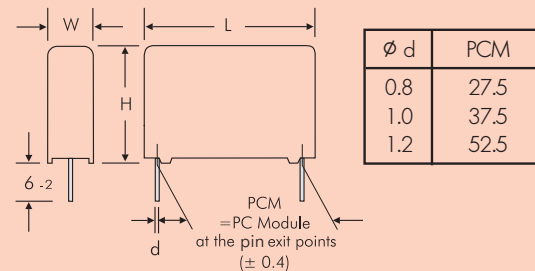

#### 4-pin version

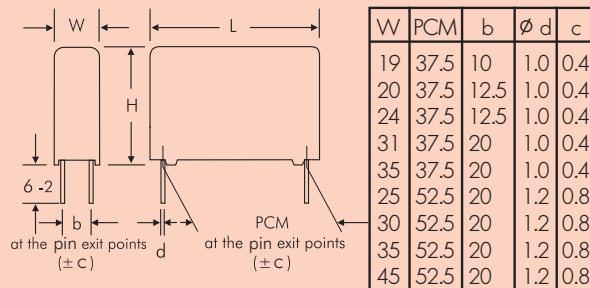

Rights reserved to amend design data without prior notification.

Continuation page 99



## Continuation

### General Data

Capacitance	W	H	L	PCM**	Pin	275 VAC*/600 VDC		Part number
						I <sub>s</sub> A	I <sub>rms</sub> (10 kHz) at 85° C A	
1.0 μF	9	19	31.5	27.5	2	55	2.5	MKPF1W41006A_____
1.5 "	11	21	31.5	27.5	2/4	80	3.5	MKPF1W41506B_____
2.2 "	13	24	31.5	27.5	2/4	120	5	MKPF1W42206D_____
3.3 "	15	26	31.5	27.5	2/4	180	5.5	MKPF1W43306F_____
4.7 "	17	34.5	31.5	27.5	2/4	260	8	MKPF1W44706I_____
6.8 "	20	39.5	31.5	27.5	2/4	370	10	MKPF1W46806J_____
10 μF	20	39.5	41.5	37.5	2/4	300	10	MKPF1W51007G_____
12 "	20	39.5	41.5	37.5	2/4	360	12	MKPF1W51207G_____
15 "	24	45.5	41.5	37.5	2/4	450	14	MKPF1W51507H_____
20 "	25	45	57	52.5	2/4	195	11	MKPF1W51509D_____
	31	46	41.5	37.5	2/4	600	16	MKPF1W52007I_____
22 "	25	45	57	52.5	2/4	260	12	MKPF1W52009D_____
	25	45	57	52.5	2/4	286	14	MKPF1W52209D_____
25 "	30	45	57	52.5	2/4	325	16	MKPF1W52509E_____
30 "	35	50	57	52.5	4	390	17	MKPF1W53009F_____
35 "	35	50	57	52.5	4	455	20	MKPF1W53509F_____
40 "	45	55	57	52.5	4	520	21	MKPF1W54009H_____
45 "	45	55	57	52.5	4	585	23	MKPF1W54509H_____
50 "	45	65	57	52.5	4	650	24	MKPF1W55009J_____


\* AC voltages:  $f \leq 100$  Hz

\*\* PCM = Printed circuit module = pin spacing


Dims. in mm.

Part number completion:	
Version code:	2-pin = 00 4-pin = D4
Tolerance:	20 % = M 10 % = K 5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 148.	

#### 2-pin version

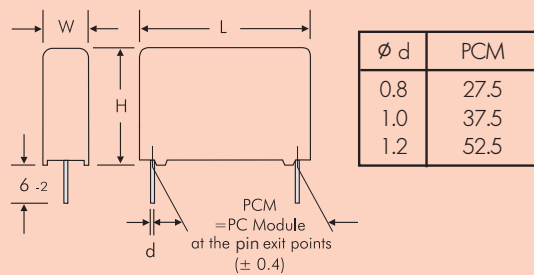

#### 4-pin version

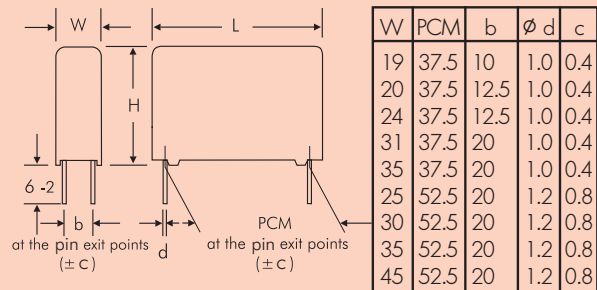

Rights reserved to amend design data without prior notification.

Continuation page 100

## Continuation

### General Data

Capacitance	W	H	L	PCM**	Pin	305 VAC*/630 VDC		Part number
						$I_s$ A	$I_{rms}$ (10 kHz) at 85° C A	
0.68 $\mu$ F	9	19	31.5	27.5	2	50	2	MKPFAW36806A_____
1.0 $\mu$ F	11	21	31.5	27.5	2/4	68	3	MKPFAW41006B_____
1.5 "	13	24	31.5	27.5	2/4	110	4	MKPFAW41506D_____
2.2 "	15	26	31.5	27.5	2/4	150	5	MKPFAW42206F_____
3.3 "	17	29	31.5	27.5	2/4	220	7	MKPFAW43306G_____
4.7 "	20	39.5	31.5	27.5	2/4	320	9	MKPFAW44706J_____
6.8 "	20	39.5	41.5	37.5	2/4	245	10	MKPFAW46807G_____
10 $\mu$ F	24	45.5	41.5	37.5	2/4	350	12	MKPFAW51007H_____
	25	45	57	52.5	2/4	150	10	MKPFAW51009D_____
12 "	24	45.5	41.5	37.5	2/4	420	13	MKPFAW51207H_____
15 "	31	46	41.5	37.5	2/4	525	15	MKPFAW51507I_____
	25	45	57	52.5	2/4	225	13	MKPFAW51509D_____
20 "	40	55	41.5	37.5	2/4	700	19	MKPFAW52007K_____
	30	45	57	52.5	2/4	300	14	MKPFAW52009E_____
22 "	35	50	57	52.5	4	330	16	MKPFAW52209F_____
25 "	35	50	57	52.5	4	375	17	MKPFAW52509F_____
30 "	45	55	57	52.5	4	450	21	MKPFAW53009H_____
35 "	45	65	57	52.5	4	525	22	MKPFAW53509J_____


\* AC voltages:  $f \leq 100$  Hz

\*\* PCM = Printed circuit module = pin spacing


Dims. in mm.

Part number completion:	
Version code:	2-pin = 00 4-pin = D4
Tolerance:	20 % = M 10 % = K 5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 148.	

#### 2-pin version

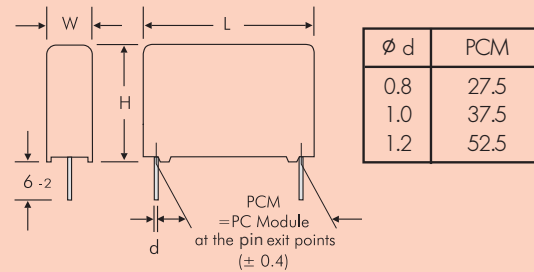

#### 4-pin version

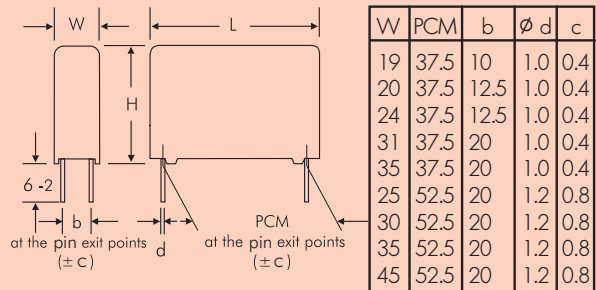

Rights reserved to amend design data without prior notification.

Continuation page 101

## Continuation

### General Data

Capacitance	W	H	L	PCM**	Pin	350 VAC*/700 VDC		Part number
						I <sub>s</sub> A	I <sub>rms</sub> (10 kHz) at 85° C A	
0.68 µF	9	19	31.5	27.5	2	70	1.5	MKPFBW36806A_____
1.0 µF	11	21	31.5	27.5	2/4	100	3	MKPFBW41006B_____
1.5 "	13	24	31.5	27.5	2/4	150	4	MKPFBW41506D_____
2.2 "	15	26	31.5	27.5	2/4	220	5	MKPFBW42206F_____
3.3 "	17	29	31.5	27.5	2/4	330	7	MKPFBW43306G_____
4.7 "	20	39.5	31.5	27.5	2/4	470	11	MKPFBW44706J_____
6.8 "	20	39.5	41.5	37.5	2/4	340	10	MKPFBW46807G_____
10 µF	24	45.5	41.5	37.5	2/4	500	13	MKPFBW51007H_____
	25	45	57	52.5	2/4	250	11	MKPFBW51009D_____
12 "	24	45.5	41.5	37.5	2/4	600	14	MKPFBW51207H_____
15 "	31	46	41.5	37.5	2/4	750	16	MKPFBW51507I_____
	25	45	57	52.5	2/4	375	13	MKPFBW51509D_____
20 "	40	55	41.5	37.5	2/4	1000	18	MKPFBW52007K_____
	30	45	57	52.5	2/4	500	16	MKPFBW52009E_____
22 "	35	50	57	52.5	4	550	18	MKPFBW52209F_____
25 "	35	50	57	52.5	4	625	19	MKPFBW52509F_____
30 "	45	55	57	52.5	4	750	22	MKPFBW53009H_____
35 "	45	65	57	52.5	4	870	25	MKPFBW53509J_____

Capacitance	W	H	L	PCM**	Pin	440 VAC*/1000 VDC		Part number
						I <sub>s</sub> A	I <sub>rms</sub> (10 kHz) at 85° C A	
0.68 "	13	24	31.5	27.5	2/4	74.8	3	MKPF4W36806D_____
1.0 µF	13	24	31.5	27.5	2/4	110	4	MKPF4W41006D_____
1.5 "	17	29	31.5	27.5	2/4	165	5	MKPF4W41506G_____
2.2 "	20	39.5	31.5	27.5	2/4	240	6	MKPF4W42206J_____
3.3 "	20	39.5	41.5	37.5	2/4	230	7.5	MKPF4W43307G_____
4.7 "	24	45.5	41.5	37.5	2/4	330	8.5	MKPF4W44707H_____
6.8 "	31	46	41.5	37.5	2/4	480	11.5	MKPF4W46807I_____
10 µF	30	45	57	52.5	2/4	400	16	MKPF4W51009E_____
12 "	35	50	57	52.5	4	480	17	MKPF4W51209F_____

\* AC voltages:  $f \leq 100$  Hz

\*\* PCM = Printed circuit module = pin spacing

Dims. in mm.




Part number completion:	
Version code:	2-pin = 00 4-pin = D4
Tolerance:	20 % = M 10 % = K 5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 148.	

Rights reserved to amend design data without prior notification.






Continuation page 102

## Continuation






Impedance change with frequency  
(general guide).

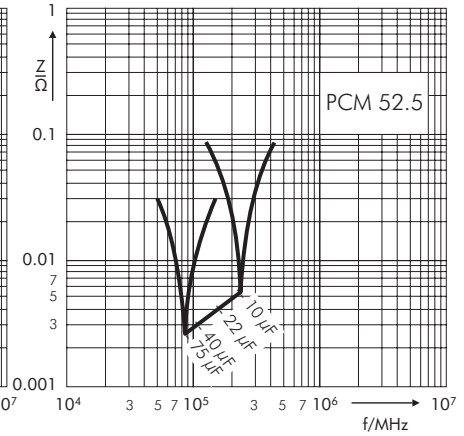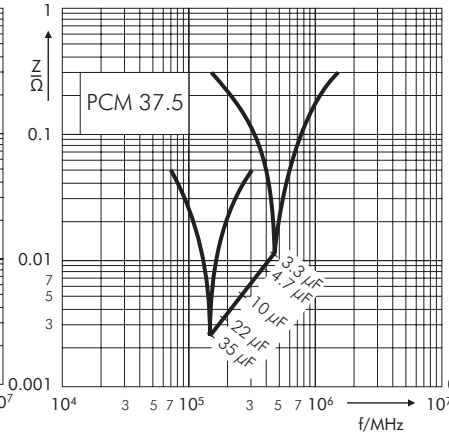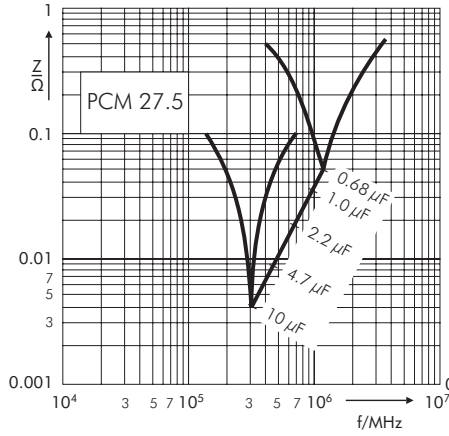

Permissible AC voltage in relation to frequency at 10° C internal temperature rise  
(general guide).

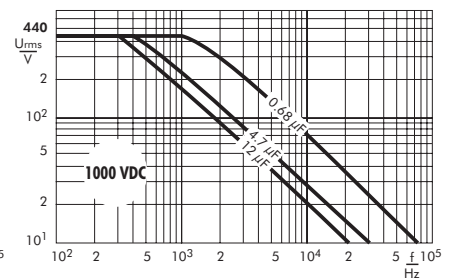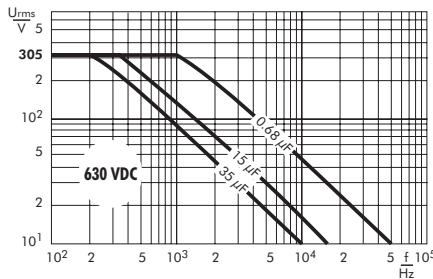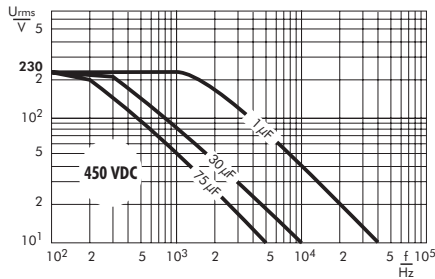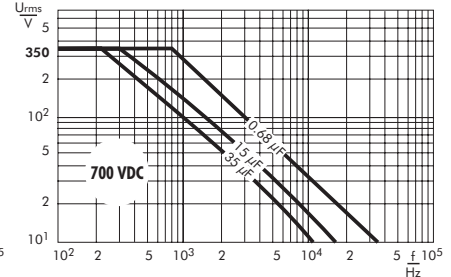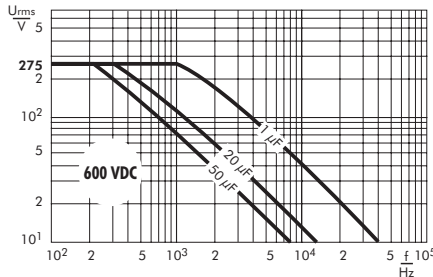

Permissible AC current in relation to frequency at 10° C internal temperature rise  
(general guide).

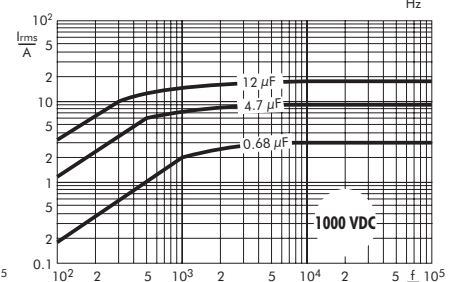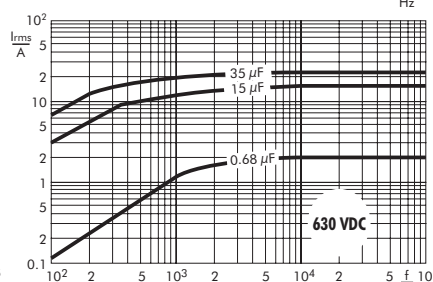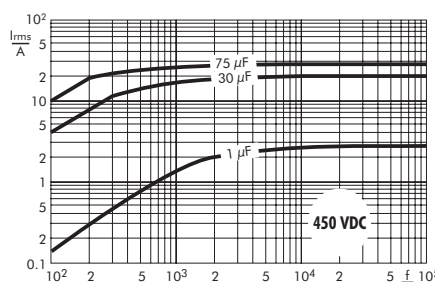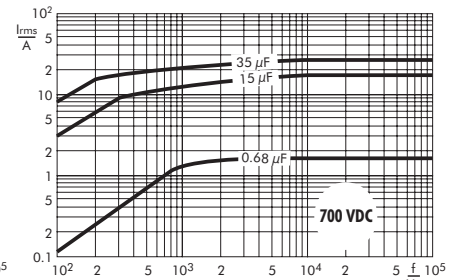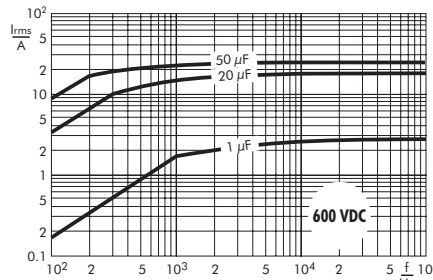

## Recommendation for Processing and Application of Through-Hole Capacitors

### Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating:  $T_{max.} \leq 125^{\circ}C$   
 soldering:  $T_{max.} \leq 135^{\circ}C$

Polypropylene: preheating:  $T_{max.} \leq 100^{\circ}C$   
 soldering:  $T_{max.} \leq 110^{\circ}C$


#### Single wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
 Dwell time:  $t < 5 \text{ sec}$

#### Double wave soldering

Soldering bath temperature:  $T < 260^{\circ}C$   
 Dwell time:  $\Sigma t < 5 \text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

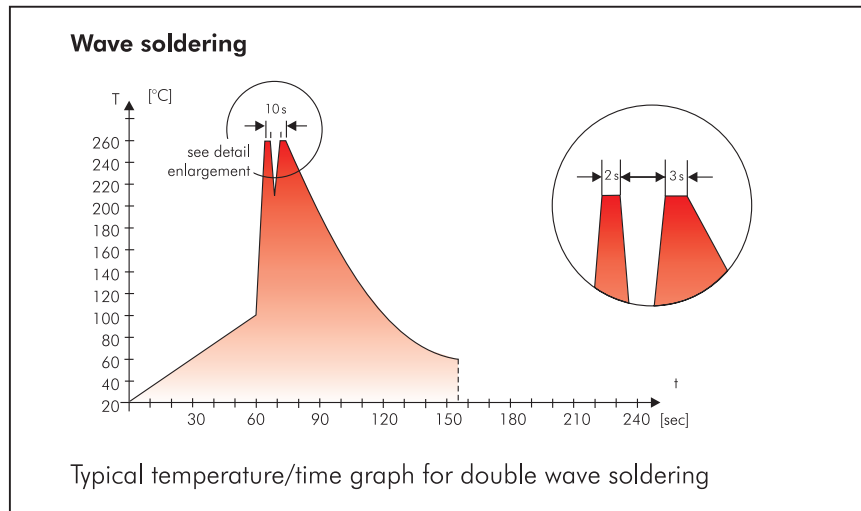

## WIMA Quality and Environmental Philosophy

### ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the infaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

### WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

### WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

### RoHS Compliance

According to the RoHS Directive 2011/65/EU certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

### DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.



# Typical Dimensions for Taping Configuration

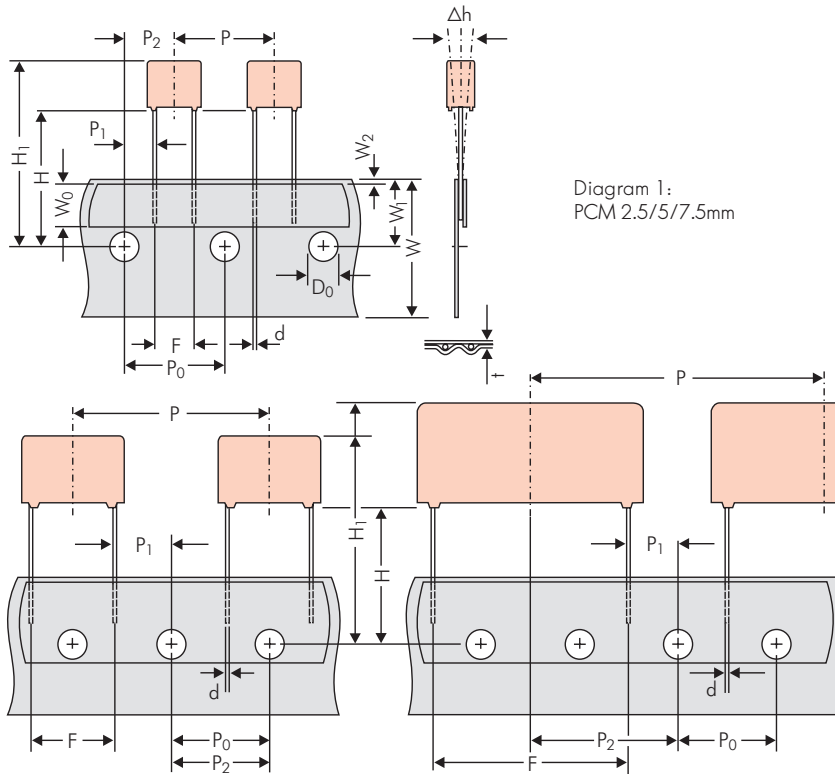


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5\*mm

\*PCM 27.5 tapping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping										
		PCM 2.5 tapping	PCM 5 tapping	PCM 7.5 tapping	PCM 10 tapping*	PCM 15 tapping*	PCM 22.5 tapping	PCM 27.5 tapping				
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5				
Hold-down tape width	W <sub>0</sub>	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape				
Hole position	W <sub>1</sub>	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5				
Hold-down tape position	W <sub>2</sub>	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.				
Feed hole diameter	D <sub>0</sub>	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2				
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5				
Feed hole pitch	P <sub>0</sub>	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch				
Feed hole centre to pin	P <sub>1</sub>	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7				
Hole centre to component centre	P <sub>2</sub>	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3				
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5				
Feed hole centre to top edge of the component	H <sub>1</sub>	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 32.25 max.	H+H <sub>component</sub> < H <sub>1</sub> 24.5 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 25.0 to 31.5	H+H <sub>component</sub> < H <sub>1</sub> 26.0 to 37.0	H+H <sub>component</sub> < H <sub>1</sub> 30.0 to 43.0	H+H <sub>component</sub> < H <sub>1</sub> 35.0 to 45.0				
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 <sup>+0.8</sup> <sub>-0.2</sub>	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8				
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.5 ±0.05 or 0.6 <sup>+0.06</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>	0.8 <sup>+0.08</sup> <sub>-0.05</sub>				
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.				
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2				
Package (see also page 149)	ROLL/AMMO			AMMO								
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2	depending on comp. dimensions		REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 or 66 ±2	REEL	φ 500 max. φ 25 ±1	B 60 ±2 68 ±2	depending on PCM and component dimensions
Unit	see details page 150.											

Dims in mm.

\* Diameter of pins see General Data.


\* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 1). P<sub>0</sub> = 12.7 or 15.0 is possible


Please clarify customer-specific deviations with the manufacturer.

## Types of Tape Packaging of Capacitors for Automatic Radial Insertion


### ■ ROLL Packaging

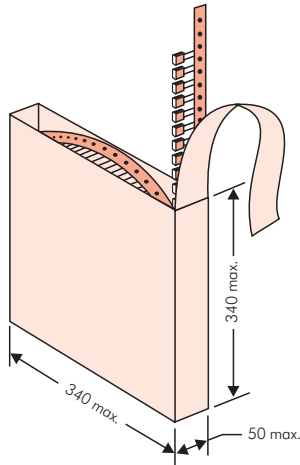

### ■ AMMO Packaging

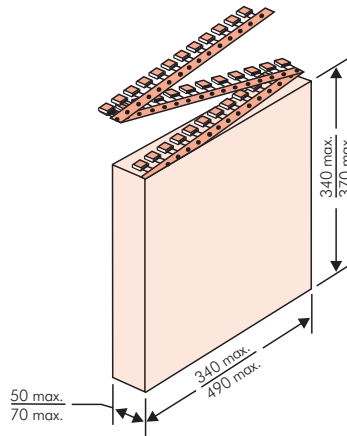

### ■ REEL Packaging

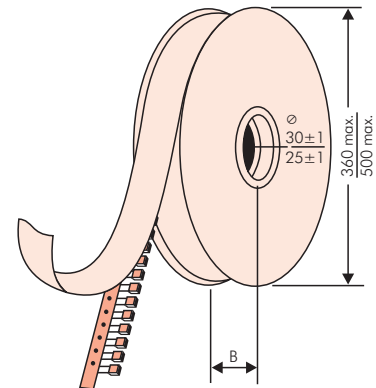

## BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

Scanner decoding of

- WIMA supplier number
- Customer's P/O number
- Customer's part number
- WIMA confirmation number
- WIMA part number
- Lot number
- Date code
- Quantity

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- capacitance tolerance
- packing

as well as gross weight and customer's name are indicated in plain text.

<b>WIMA</b> Best Capacitors Made in Germany		Werk Unna
Supplier-ID: 123456789	<b>RoHS</b> 2011/65/EU	Date Code: 08.10.10
Purchase Order No. (P/O): Bestellung xyz		Quantity: 5.000
Customer Part No.: KUNDETEILENUMMER		Customer No.: 0000100002
		Gross Weight [g]: 1870
WIMA Confirmation No.: 0001004053000100	WIMA Part No.: MKS2C034701C00K89D	
Handling Unit: <b>MKS 2</b>	<b>QTY: 5.000</b>	<b>COO: DE</b>
	<b>MKS 2 0.47 µF 63 VDC 3.5x8.5x7.2 RMS</b>	
<b>1000067326</b>	Standard 10% Loss - Standard	Drahte 6-2
	Vorliege Debitor Inland	Week 03/2011

BARCODE „Code 39“



## Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit								
						ROLL		REEL				AMMO		
	W	H	L	Codes		S	H16.5	H18.5	ø 360	ø 500	340 × 340	490 × 370		
					N	O	F	I	H	J	A	C	B	D
<b>2.5 mm</b>	2.5	7	4.6	<b>0B</b>	5000		2200	2500			2800			
	3	7.5	4.6	<b>0C</b>	5000		2000	2300			2300			
	3.8	8.5	4.6	<b>0D</b>	5000		1500	1800			1800			
	4.6	9	4.6	<b>0E</b>	5000		1200	1500			1500			
	5.5	10	4.6	<b>0F</b>	5000		900	1200			1200			
<b>5 mm</b>	2.5	6.5	7.2	<b>1A</b>	5000		2200	2500			2800			
	3	7.5	7.2	<b>1B</b>	5000		2000	2300			2300			
	3.5	8.5	7.2	<b>1C</b>	5000		1600	2000			2000			
	4.5	6	7.2	<b>1D</b>	6000		1300	1500			1500			
	4.5	9.5	7.2	<b>1E</b>	4000		1300	1500			1500			
	5	10	7.2	<b>1F</b>	3500		1100	1400			1400			
	5.5	7	7.2	<b>1G</b>	4000		1000	1200			1200			
	5.5	11.5	7.2	<b>1H</b>	2500		1000	1200			1200			
	6.5	8	7.2	<b>1I</b>	2500		800	1000			1000			
	7.2	8.5	7.2	<b>1J</b>	2500		700	1000			1000			
	7.2	13	7.2	<b>1K</b>	2000		700	950			1000			
	8.5	10	7.2	<b>1L</b>	2000		600	800			800			
	8.5	14	7.2	<b>1M</b>	1500		600	800			800			
11	16	7.2	<b>1N</b>	1000		500	600			400				
<b>7.5 mm</b>	2.5	7	10	<b>2A</b>	5000			2500	4400		2500			
	3	8.5	10	<b>2B</b>	5000			2200	4300		2300		4150	
	4	9	10	<b>2C</b>	4000			1700	3200		1700		3100	
	4.5	9.5	10.3	<b>2D</b>	3500			1500	2900		1400		2700	
	5	10.5	10.3	<b>2E</b>	3000			1300	2500		1300			
	5.7	12.5	10.3	<b>2F</b>	2000			1000	2200		1100			
	7.2	12.5	10.3	<b>2G</b>	1500			900	1800		1000			
<b>10 mm</b>	3	9	13	<b>3A</b>	3000			1100	2200				1900	
	4	8.5	13.5	<b>FA</b>	3000			900	1600				1450	
	4	9	13	<b>3C</b>	3000			900	1600				1450	
	4	9.5	13	<b>3D</b>	3000			900	1600				1400	
	5	10	13.5	<b>FB</b>	2000			700	1300				1200	
	5	11	13	<b>3F</b>	3000			700	1300				1200	
	6	12	13	<b>3G</b>	2400			550	1100				1000	
	6	12.5	13	<b>3H</b>	2400			550	1100				1000	
8	12	13	<b>3I</b>	2000			400	800				740		
<b>15 mm</b>	5	11	18	<b>4B</b>	2400			600	1200				1150	
	5	13	19	<b>FC</b>	1000			600	1200				1200	
	6	12.5	18	<b>4C</b>	2000			500	1000				1000	
	6	14	19	<b>FD</b>	1000			500	1000				1000	
	7	14	18	<b>4D</b>	1600			450	900				850	
	7	15	19	<b>FE</b>	1000			450	900				850	
	8	15	18	<b>4F</b>	1200			400	800				740	
	8	17	19	<b>FF</b>	500			400	800				740	
	9	14	18	<b>4H</b>	1200			350	700				650	
	9	16	18	<b>4J</b>	900			350	700				650	
	10	18	19	<b>FG</b>	500			300	650				590	
11	14	18	<b>4M</b>	1000			300	600				540		
<b>22.5 mm</b>	5	14	26.5	<b>5A</b>	1200				800				770	
	6	15	26.5	<b>5B</b>	1000				700				640	
	7	16.5	26.5	<b>5D</b>	760				600				550	
	8	20	28	<b>FH</b>	500				500				480	
	8.5	18.5	26.5	<b>5F</b>	500				480				450	
	10	22	28	<b>FI</b>	570*				420				380	
	10.5	19	26.5	<b>5G</b>	594*				400				360	
	10.5	20.5	26.5	<b>5H</b>	594*				400				360	
	11	21	26.5	<b>5I</b>	561*				380				350	
	12	24	28	<b>FJ</b>	480*				350				310	

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



## Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	H16.5	H18.5	ø 360		ø 500		340 × 340		490 × 370
					N	O	F	I	H	J	A	C	B	D	
<b>27.5 mm</b>	9	19	31.5	<b>6A</b>	567*	–	–	–	–	460/340*	–	–	420		
	11	21	31.5	<b>6B</b>	459*	–	–	–	–	380/280*	–	–	350		
	13	24	31.5	<b>6D</b>	378*	–	–	–	–	300	–	–	290		
	13	25	33	<b>FK</b>	405*	–	–	–	–	–	–	–	–		
	15	26	31.5	<b>6F</b>	324*	–	–	–	–	270	–	–	250		
	15	26	33	<b>FL</b>	324*	–	–	–	–	–	–	–	–		
	17	29	31.5	<b>6G</b>	198*	–	–	–	–	–	–	–	–		
	17	34.5	31.5	<b>6I</b>	198*	–	–	–	–	–	–	–	–		
	20	32	33	<b>FM</b>	162*	–	–	–	–	–	–	–	–		
	20	39.5	31.5	<b>6J</b>	162*	–	–	–	–	–	–	–	–		
<b>37.5 mm</b>	9	19	41.5	<b>7A</b>	441*	–	–	–	–	–	–	–	–		
	11	22	41.5	<b>7B</b>	357*	–	–	–	–	–	–	–	–		
	13	24	41.5	<b>7C</b>	294*	–	–	–	–	–	–	–	–		
	15	26	41.5	<b>7D</b>	252*	–	–	–	–	–	–	–	–		
	17	29	41.5	<b>7E</b>	154*	–	–	–	–	–	–	–	–		
	19	32	41.5	<b>7F</b>	140*	–	–	–	–	–	–	–	–		
	20	39.5	41.5	<b>7G</b>	126*	–	–	–	–	–	–	–	–		
	24	45.5	41.5	<b>7H</b>	112*	–	–	–	–	–	–	–	–		
	31	46	41.5	<b>7I</b>	84*	–	–	–	–	–	–	–	–		
	35	50	41.5	<b>7J</b>	35*	–	–	–	–	–	–	–	–		
	40	55	41.5	<b>7K</b>	28*	–	–	–	–	–	–	–	–		
<b>48.5 mm</b>	19	31	56	<b>8D</b>	120*	–	–	–	–	–	–	–	–		
	23	34	56	<b>8E</b>	80*	–	–	–	–	–	–	–	–		
	27	37.5	56	<b>8H</b>	84*	–	–	–	–	–	–	–	–		
	33	48	56	<b>8J</b>	25*	–	–	–	–	–	–	–	–		
	37	54	56	<b>8L</b>	25*	–	–	–	–	–	–	–	–		
<b>52.5 mm</b>	25	45	57	<b>9D</b>	70*	–	–	–	–	–	–	–	–		
	30	45	57	<b>9E</b>	60*	–	–	–	–	–	–	–	–		
	35	50	57	<b>9F</b>	25*	–	–	–	–	–	–	–	–		
	45	55	57	<b>9H</b>	20*	–	–	–	–	–	–	–	–		
	45	65	57	<b>9J</b>	20*	–	–	–	–	–	–	–	–		

\* for 2-inch transport pitches.

\* TPS (Tray-Packing-System). Plate versions may have different packing units. Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.

Updated data on [www.wima.com](http://www.wima.com)



# WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Version code (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-	20%	bulk	6-2			
<b>Type description:</b>				<b>Rated voltage:</b>		<b>Capacitance:</b>			<b>Size:</b>		<b>Tolerance:</b>			<b>Packing:</b>			
SMD-PET = SMDT				50 VDC = B0		22 pF = 0022			4.8x3.3x3 Size 1812 = KA		±20% = M			AMMO H16.5 340x340 = A			
SMD-PEN = SMDN				63 VDC = C0		47 pF = 0047			4.8x3.3x4 Size 1812 = KB		±10% = K						
SMD-PPS = SMDI				100 VDC = D0		100 pF = 0100			5.7x5.1x3.5 Size 2220 = QA		±5% = J			AMMO H16.5 490x370 = B			
FKP 02 = FKPO				250 VDC = F0		150 pF = 0150			5.7x5.1x4.5 Size 2220 = QB		±2.5% = H			AMMO H18.5 340x340 = C			
MKS 02 = MKS0				400 VDC = G0		220 pF = 0220			7.2x6.1x3 Size 2824 = TA		±1% = E			AMMO H18.5 490x370 = D			
FKS 2 = FKS2				450 VDC = H0		330 pF = 0330			7.2x6.1x5 Size 2824 = TB		...			REEL H16.5 360 = F			
FKP 2 = FKP2				520 VDC = H2		470 pF = 0470			10.2x7.6x5 Size 4030 = VA		REEL H16.5 500 = H			REEL H18.5 360 = I			
FKS 3 = FKS3				600 VDC = I0		680 pF = 0680			12.7x10.2x6 Size 5040 = XA								
FKP 3 = FKP 3				630 VDC = J0		1000 pF = 1100			15.3x13.7x7 Size 6054 = YA		ROLL H16.5 = N			REEL H18.5 500 = J			
MKS 2 = MKS2				700 VDC = K0		1500 pF = 1150			2.5x7x4.6 PCM 2.5 = 0B								
MKP 2 = MKP2				800 VDC = L0		2200 pF = 1220			3x7.5x4.6 PCM 2.5 = 0C		ROLL H18.5 = O			BLISTER W12 180 = P			
MKS 4 = MKS4				850 VDC = M0		3300 pF = 1330			2.5x6.5x7.2 PCM 5 = 1A								
MKP 4C = MKPC				900 VDC = N0		4700 pF = 1470			3x7.5x7.2 PCM 5 = 1B		BLISTER W16 330 = R			BLISTER W24 330 = T			
MKP 4 = MKP4				1000 VDC = O1		6800 pF = 1680			2.5x7x10 PCM 7.5 = 2A								
MKP 10 = MKP1				1100 VDC = P0		0.01 µF = 2100			3x8.5x10 PCM 7.5 = 2B		Bulk/TPS Standard = S			...			
FKP 1 = FKP1				1200 VDC = Q0		0.022 µF = 2220			3x9x13 PCM 10 = 3A								
MKP-X2 = MKX2				1250 VDC = R0		0.047 µF = 2470			4x9x13 PCM 10 = 3C		...			Pin length (untaped)			
MKP-X1 R = MKX1				1500 VDC = S0		0.1 µF = 3100			5x11x18 PCM 15 = 4B								
MKP-Y2 = MKY2				1600 VDC = T0		0.22 µF = 3220			6x12.5x18 PCM 15 = 4C		3.5 ±0.5 = C9			6-2 = SD			
MP 3-X2 = MPX2				2000 VDC = U0		0.47 µF = 3470			5x14x26.5 PCM 22.5 = 5A		16 ±1 = P1			Pin length (taped)			
MP 3-X1 = MPX1				2500 VDC = V0		1 µF = 4100			6x15x26.5 PCM 22.5 = 5B		none = 00			...			
MP 3-Y2 = MPY2				3000 VDC = W0		2.2 µF = 4220			9x19x31.5 PCM 27.5 = 6A		...						
MP 3R-Y2 = MPRY				4000 VDC = X0		4.7 µF = 4470			11x21x31.5 PCM 27.5 = 6B								
MKP 4F = MKPF				6000 VDC = Y0		10 µF = 5100			9x19x41.5 PCM 37.5 = 7A								
Snubber MKP = SNMP				250 VAC = 0W		22 µF = 5220			11x22x41.5 PCM 37.5 = 7B								
Snubber FKP = SNFP				275 VAC = 1W		47 µF = 5470			19x31x56 PCM 48.5 = 8D								
GTO MKP = GTOM				300 VAC = 2W		100 µF = 6100			25x45x57 PCM 52.5 = 9D								
DC-LINK MKP 3 = DCP3				305 VAC = AW		220 µF = 6220			...								
DC-LINK MKP 4 = DCP4				350 VAC = BW		1000 µF = 7100			Version code:								
DC-LINK MKP 4S = DCP5				440 VAC = 4W		1500 µF = 7150			Standard = 00								
DC-LINK MKP 5 = DCP5				500 VAC = 5W		...			Version A1 = 1A								
DC-LINK MKP 6 = DCP6				...		...			Version A1.1.1 = 1B								
DC-LINK HC = DCHC									Version A2 = 2A								
DC-LINK HY = DCHY									...								

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.