



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- Features:
- Thin film technology for precision and stability
  - Excellent power to size ratio
  - Outstanding pulse handling
  - Excellent overall stability
  - Sn termination on Ni barrier layer
  - Tight tolerance down to  $\pm 0.1\%$
  - Extremely low TCR down to  $\pm 15\text{ppm}/^\circ\text{C}$
  - High power rating up to 1 Watt
  - SMD enabled structure
  - AEC-Q200 qualified
  - RoHS compliant, lead-free and halogen-free



| Electrical Specifications |              |                                     |  |   |                                     |  |          |          |    |
|---------------------------|--------------|-------------------------------------|--|---|-------------------------------------|--|----------|----------|----|
| Type/Code                 | Package Size | Power Rating (Watts) @ 70°C         | Maximum Working Voltage <sup>(1)</sup> | Maximum Overload Voltage <sup>(2)</sup> | Resistance Temperature Coefficient  | Ohmic Range ( $\Omega$ ) and Tolerance |          |          |    |
|                           |              |                                     |  |   |                                     | 0.1%                                   | 0.5%     | 1%       | 5% |
| MLFA13 <sup>(3)</sup>     | 0102         | 0.3W                                | 200V                                   | 400V                                    | $\pm 50\text{ ppm}/^\circ\text{C}$  | -                                      | 8.2 - 1M |          |    |
|                           |              |                                     |  |   | $\pm 100\text{ ppm}/^\circ\text{C}$ | -                                      | 8.2 - 1M |          |    |
|                           |              | Jumper: 2A                          | -                                      | 0 $\Omega$ (<15m $\Omega$ )             |                                     |  |          |          |    |
| MLFA25                    | 0204         | 0.4W                                | 200V                                   | 400V                                    | $\pm 15\text{ ppm}/^\circ\text{C}$  | 10 - 300K                              |          |          |    |
|                           |              |                                     |  |   | $\pm 25\text{ ppm}/^\circ\text{C}$  | 10 - 1M                                |          |          |    |
|                           |              |                                     |  |   | $\pm 50\text{ ppm}/^\circ\text{C}$  | 10 - 1M                                | 1 - 1M   | 0.2 - 1M |    |
|                           |              | $\pm 100\text{ ppm}/^\circ\text{C}$ | -                                      | 0.1 - 1M                                |                                     |  |          |          |    |
| Jumper: 2A                | -            | 0 $\Omega$ (<15m $\Omega$ )         |  |   |                                     |  |          |          |    |
| MLFA1                     | 0207         | 1W                                  | 350V                                   | 700V                                    | $\pm 15\text{ ppm}/^\circ\text{C}$  | 10 - 300K                              |          |          |    |
|                           |              |                                     |  |   | $\pm 25\text{ ppm}/^\circ\text{C}$  | 10 - 1M                                |          |          |    |
|                           |              |                                     |  |   | $\pm 50\text{ ppm}/^\circ\text{C}$  | 10 - 1M                                | 1 - 1M   | 0.2 - 1M |    |
|                           |              |                                     |  |   | $\pm 100\text{ ppm}/^\circ\text{C}$ | -                                      | 0.1 - 1M |          |    |
|                           |              | Jumper: 4A                          | -                                      | 0 $\Omega$ (<15m $\Omega$ )             |                                     |  |          |          |    |


<sup>(1)</sup> Working Voltage =  $\sqrt{P \cdot R}$  or Max. Operating Voltage listed above, whichever is lower.

<sup>(2)</sup> Overload Voltage =  $2.5 \cdot \sqrt{P \cdot R}$  or Max. Overload Voltage listed above, whichever is lower.

<sup>(3)</sup> Lower TCR with lower Power Ratings may be available - contact factory

RCWV (Rated Continuous Working Voltage) =  $\sqrt{P \cdot R}$  or Max Operating Voltage, whichever is lower.

### Mechanical Specifications

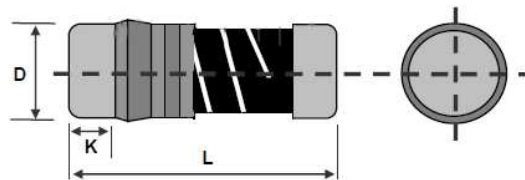


| Type / Code | Weight (1000 pc) (g) | L<br>Body Length  | D<br>Body Diameter | K<br>Termination  | Unit   |
|-------------|----------------------|-------------------|--------------------|-------------------|--------|
| MLFA13      | 7.7                  | 0.087 $\pm$ 0.004 | 0.043 $\pm$ 0.004  | 0.018 $\pm$ 0.002 | inches |
|             |                      | 2.20 $\pm$ 0.10   | 1.10 $\pm$ 0.10    | 0.45 $\pm$ 0.05   | mm     |
| MLFA25      | 18.7                 | 0.138 $\pm$ 0.008 | 0.055 $\pm$ 0.006  | 0.031 $\pm$ 0.004 | inches |
|             |                      | 3.50 $\pm$ 0.20   | 1.40 $\pm$ 0.15    | 0.80 $\pm$ 0.10   | mm     |
| MLFA1       | 80.9                 | 0.232 $\pm$ 0.008 | 0.087 $\pm$ 0.008  | 0.051 $\pm$ 0.004 | inches |
|             |                      | 5.90 $\pm$ 0.20   | 2.20 $\pm$ 0.20    | 1.30 $\pm$ 0.10   | mm     |

Operating Temperature Range: -55 ~ +155°C



Power Derating Curve:

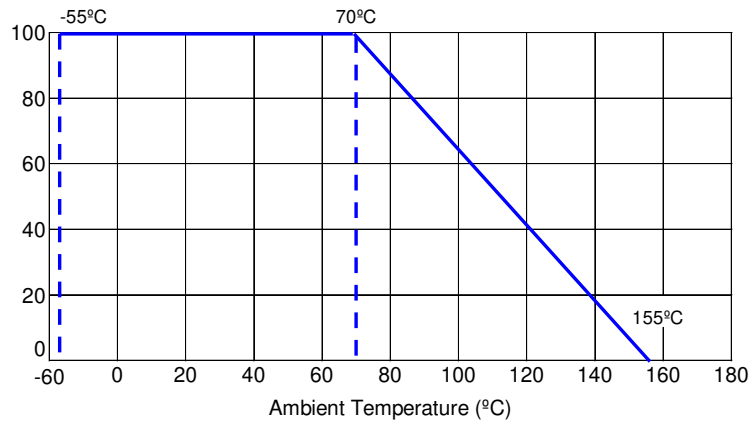


| Performance Characteristics                    |   |   |
|--|---|---|
| Test   | Test Method   | Test Specification  |
| Temperature Coefficient of Resistance (T.C.R.) | JIS-C-5201-1 4.8<br>IEC-60115-1 4.8<br>-55°C ~ +125°C, 25°C is the reference temperature                        | As specified  |
| Short Time Overload                            | JIS-C-5201-1 4.13<br>IEC-60115-1 4.13<br>RCWV*2.5 or max. overload voltage whichever is lower for 5 seconds     | 10Ω-270KΩ:±(0.1%+0.05Ω)<br><10Ω&>270KΩ:±(0.15%+0.05Ω)<br>MLFA13: ±(0.15%+0.05Ω) |
| Insulation Resistance                          | JIS-C-5201-1 4.6<br>IEC-60115-1 4.6<br>Max. overload voltage for 1 minute                                       | ≥10G  |
| Endurance                                      | JIS-C-5201-1 4.25<br>IEC-60115-1 4.25.1<br>70±2°C, RCWV for 1000 hours<br>with 1.5 hour "ON" and 0.5 hour "OFF" | 10Ω-270KΩ:±(0.25%+0.05Ω)<br><10Ω&>270KΩ:±(0.5%+0.05Ω)<br>MLFA13: ±(0.5%+0.05Ω)  |
| Biased Humidity                                | MIL-STD-202 Method 103<br>1000 hours 85°C/85% RH 10% of operating power   | 10Ω-270KΩ:±(0.5%+0.05Ω)<br><10Ω&>270KΩ:±(1%+0.05Ω)<br>MLFA13: ±(2%+0.05Ω)       |
| High Temperature Exposure                      | MIL-STD-202 Method 108<br>at +155°C for 1000 hours  | 10Ω-270KΩ:±(0.25%+0.05Ω)<br><10Ω&>270KΩ:±(0.5%+0.05Ω)<br>MLFA13: ±(1%+0.05Ω)    |
| Board Flex                                     | AEC-Q200-005<br>Bending once for 60 seconds with 2mm  | 10Ω-270KΩ:±(0.1%+0.05Ω)<br><10Ω&>270KΩ:±(0.5%+0.05Ω)<br>MLFA13: ±(0.5%+0.05Ω)   |
| Solderability                                  | JIS-C-5201-1 4.17<br>IEC-60115-1 4.17<br>J-STD-002<br>245±5°C for 3 seconds                                     | 95% min. coverage   |
| Resistance to Soldering Heat                   | MIL-STD-202 Method 210<br>260±5°C for 10 seconds  | 10Ω-270KΩ:±(0.1%+0.05Ω)<br><10Ω&>270KΩ:±(0.25%+0.05Ω)<br>MLFA13: ±(0.25%+0.05Ω) |
| Voltage Proof                                  | JIS-C-5201-1 4.7<br>IEC-60115-1 4.7<br>1.42 times max. operating voltage for 1 minute                           | No breakdown or flashover   |


| Performance Characteristics (cont.) |  |   |
|-------------------------------------|--|---|
| Test                                | Test Method  | Test Specification  |
| Leaching                            | JIS-C-5201-1 4.18<br>IEC-60068-2-58 8.2.1<br>260±5°C for 30 seconds  | Individual leaching area ≤5%<br>Total leaching area ≤10%                    |
| Temperature Cycling                 | JESD22 Method JA-104<br>-55°C to +125°C, 1000 cycles   | 10Ω-270KΩ:±(0.25%+0.05Ω)<br><10Ω>270KΩ:±(0.5%+0.05Ω)<br>MLFA13: ±(1%+0.05Ω) |
| Mechanical Shock                    | MIL-STD-202 Method 213<br>Wave Form: Tolerance for half sine shock pulse.<br>Peak value is 100g's. Normal duration (D) is 6. | ±(0.25%+0.05Ω)  |
| Vibration                           | MIL-STD-202 Method 204<br>5 g's for 20 minutes., 12 cycles each of 3 orientations,<br>10-2000 Hz                             | ±(0.5%+0.05Ω)   |
| ESD                                 | AEC-Q200-002<br>Human body, 2KV  | ±(0.5%+0.05Ω)   |
| Resistance to Solvents              | MIL-STD-202 Method 215<br>Add aqueous wash chemical - OKEM clean or equivalent. Do not use banned solvents.                  | No visible damage on appearance and marking.                                |
| Terminal Strength                   | AEC-Q200-006<br>Force of 1.8 Kg for 60 seconds   | No breakage   |
| Flammability                        | UL-94<br>V-0 or V-1 are acceptable. Electrical test not required.  | No ignition of the tissue paper or scorching of the pinewood board          |

RCWV (rated continuous working voltage) =  $\sqrt{P \cdot R}$  or max. operating voltage whichever is lower.

Storage temperature: 15~28 °C. Humidity < 80% R.H.
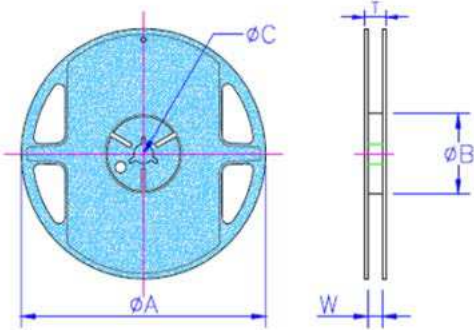
| Reel Specifications  |               |               |               |               |               |               |        |
|--|---------------|---------------|---------------|---------------|---------------|---------------|--------|
|  |               |               |               |               |               |               |        |
| Type / Code  | Reel Diameter | φA            | φB            | φC            | W             | T             | Unit   |
| MLFA13   | 0.276         | 7.028 ± 0.059 | 2.362 ± 0.039 | 0.512 ± 0.008 | 0.354 ± 0.020 | 0.492 ± 0.020 | inches |
|  | 7.00          | 178.50 ± 1.50 | 60.00 ± 1.00  | 13.00 ± 0.20  | 9.00 ± 0.50   | 12.50 ± 0.50  | mm     |
| MLFA25   | 0.276         | 7.028 ± 0.059 | 2.362 ± 0.039 | 0.512 ± 0.008 | 0.354 ± 0.020 | 0.492 ± 0.020 | inches |
|  | 7.00          | 178.50 ± 1.50 | 60.00 ± 1.00  | 13.00 ± 0.20  | 9.00 ± 0.50   | 12.50 ± 0.50  | mm     |
| MLFA1  | 0.276         | 7.028 ± 0.059 | 2.362 ± 0.039 | 0.512 ± 0.020 | 0.512 ± 0.020 | 0.610 ± 0.020 | inches |
|  | 7.00          | 178.50 ± 1.50 | 60.00 ± 1.00  | 13.00 ± 0.50  | 13.00 ± 0.50  | 15.50 ± 0.50  | mm     |

**Packaging Specifications - Embossed Plastic Tape**

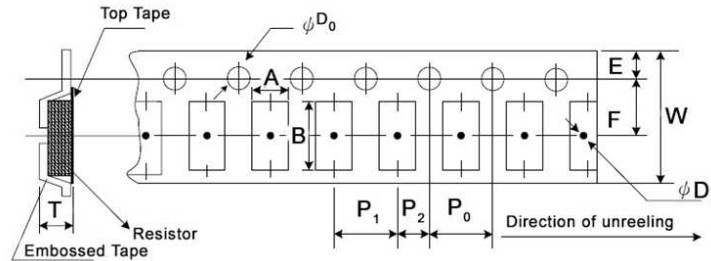


| Type / Code | A             | B             | W             | E             | F             | P0            | Unit   |
|-------------|---------------|---------------|---------------|---------------|---------------|---------------|--------|
| MLFA13      | 0.051 ± 0.004 | 0.094 ± 0.004 | 0.315 ± 0.004 | 0.069 ± 0.004 | 0.138 ± 0.002 | 0.157 ± 0.004 | inches |
|             | 1.30 ± 0.10   | 2.40 ± 0.10   | 8.00 ± 0.10   | 1.75 ± 0.10   | 3.50 ± 0.05   | 4.00 ± 0.10   | mm     |
| MLFA25      | 0.061 ± 0.004 | 0.144 ± 0.004 | 0.315 ± 0.004 | 0.069 ± 0.004 | 0.138 ± 0.002 | 0.157 ± 0.004 | inches |
|             | 1.55 ± 0.10   | 3.65 ± 0.10   | 8.00 ± 0.10   | 1.75 ± 0.10   | 3.50 ± 0.05   | 4.00 ± 0.10   | mm     |
| MLFA1       | 0.094 ± 0.004 | 0.242 ± 0.004 | 0.472 ± 0.004 | 0.069 ± 0.004 | 0.217 ± 0.002 | 0.157 ± 0.004 | inches |
|             | 2.40 ± 0.10   | 6.15 ± 0.10   | 12.00 ± 0.10  | 1.75 ± 0.10   | 5.50 ± 0.05   | 4.00 ± 0.10   | mm     |


| Type / Code | P1            | P2            | D0            | D1         | T             | Unit   |
|-------------|---------------|---------------|---------------|------------|---------------|--------|
| MLFA13      | 0.157 ± 0.004 | 0.079 ± 0.002 | 0.059 ± 0.004 | 0.035 min. | 0.059 ± 0.004 | inches |
|             | 4.00 ± 0.10   | 2.00 ± 0.05   | 1.50 ± 0.10   | 0.90 min.  | 1.50 ± 0.10   | mm     |
| MLFA25      | 0.157 ± 0.004 | 0.079 ± 0.002 | 0.059 ± 0.004 | 0.035 min. | 0.071 ± 0.004 | inches |
|             | 4.00 ± 0.10   | 2.00 ± 0.05   | 1.50 ± 0.10   | 0.90 min.  | 1.80 ± 0.10   | mm     |
| MLFA1       | 0.157 ± 0.004 | 0.079 ± 0.002 | 0.059 ± 0.004 | 0.055 min. | 0.106 ± 0.004 | inches |
|             | 4.00 ± 0.10   | 2.00 ± 0.05   | 1.50 ± 0.10   | 1.40 min.  | 2.70 ± 0.10   | mm     |

**Recommended Pad Layout**

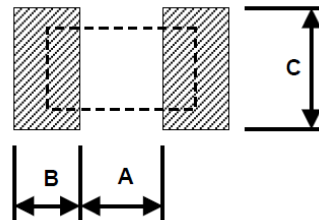


| Type / Code | A     | B     | C     | Unit   |
|-------------|-------|-------|-------|--------|
| MLFA13      | 0.039 | 0.031 | 0.059 | inches |
|             | 1.00  | 0.80  | 1.50  | mm     |
| MLFA25      | 0.063 | 0.047 | 0.063 | inches |
|             | 1.60  | 1.20  | 1.60  | mm     |
| MLFA1       | 0.118 | 0.067 | 0.094 | inches |
|             | 3.00  | 1.70  | 2.40  | mm     |

**Soldering Condition:**

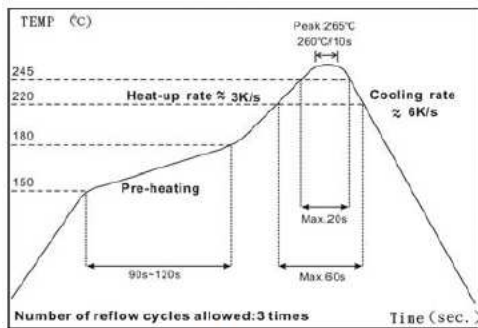

IR Reflow Soldering

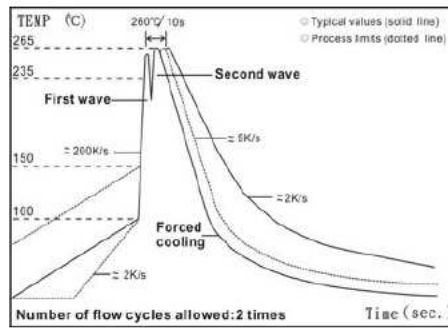


Wave Soldering (Flow Soldering)

- (1) Time of IR reflow soldering at maximum temperature point 260°C : 10s
- (2) Time of wave soldering at maximum temperature point 260°C : 10s
- (3) Time of soldering iron at maximum temperature point 410°C : 5s


**Pulse Withstanding Capacity**

The single impulse graph is the result of 50 impulses of rectangular shape applied at one-minute intervals. The limit of acceptance was a shift in resistance of less than 1% from the initial value. The power applied was subject to the restrictions of the maximum permissible impulse voltage graph shown.

**MLFA13 Single Pulse**

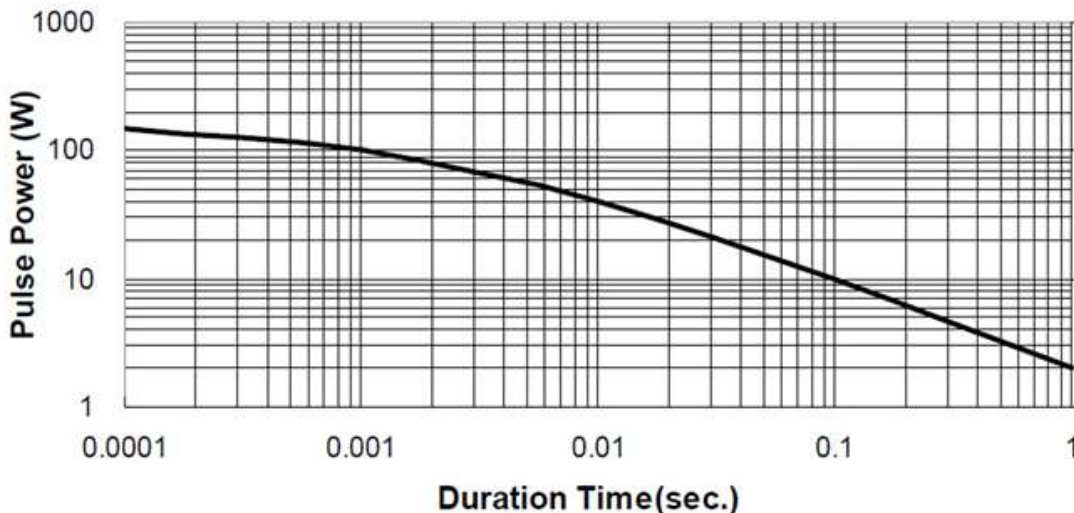


MLFA25/MLFA1 Single Pulse (100 Ohm)

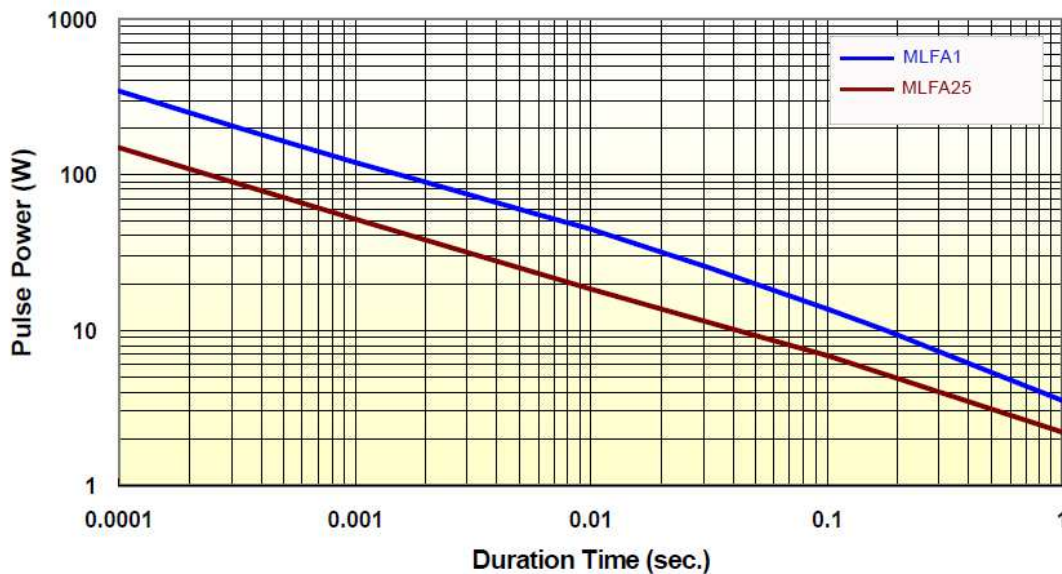


**Continuous Pulse**

The continuous load graph was obtained by applying repetitive rectangular pulses where the pulse period was adjusted so that the average power dissipated in the resistor was equal to its rated power at 70°C. Again the limit of acceptance was a shift in resistance of less than 1% from the initial value.


MLFA13 Continuous Pulse

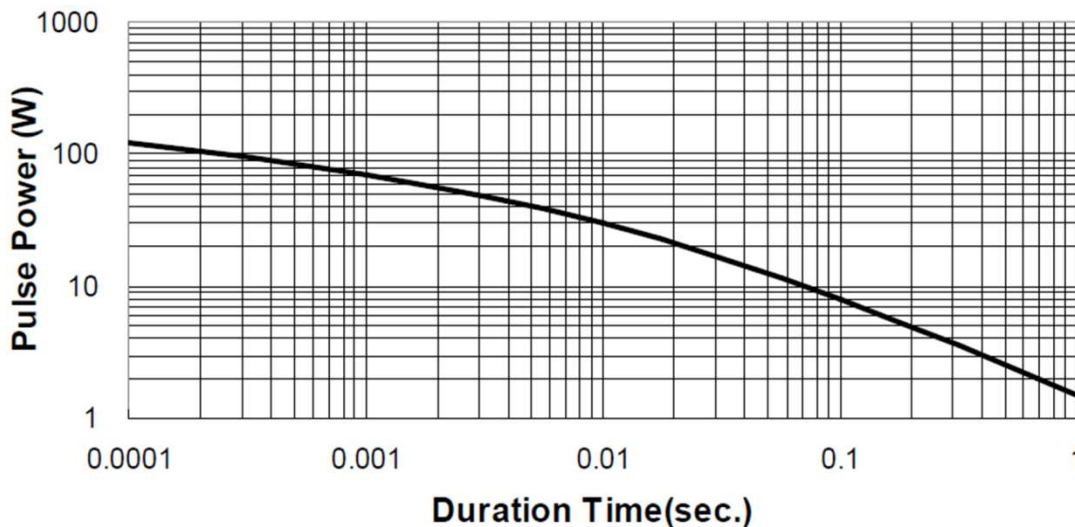

MLFA13 Pulse Voltage (100 Ohm)

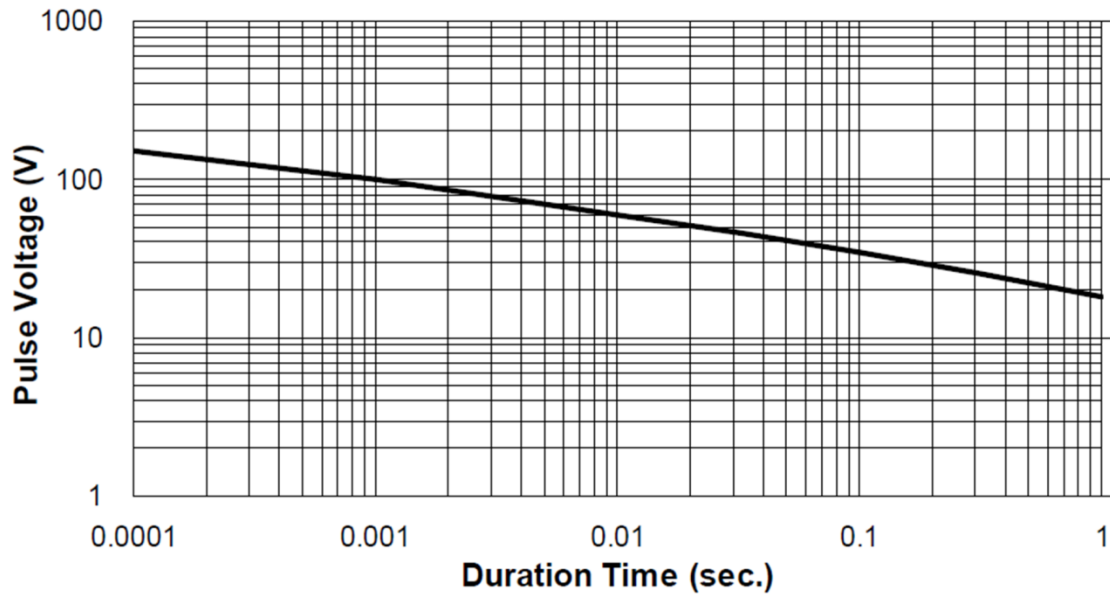


MLFA25/MLFA1 Continuous Pulse (100 Ohm)

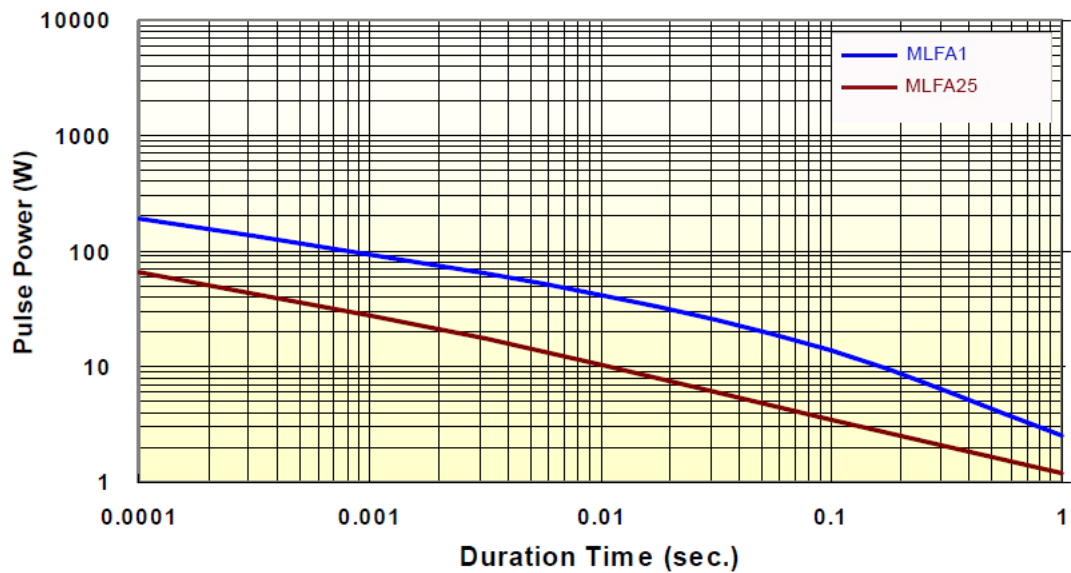




MLFA25/MLFA1 Pulse Voltage (100 Ohm)

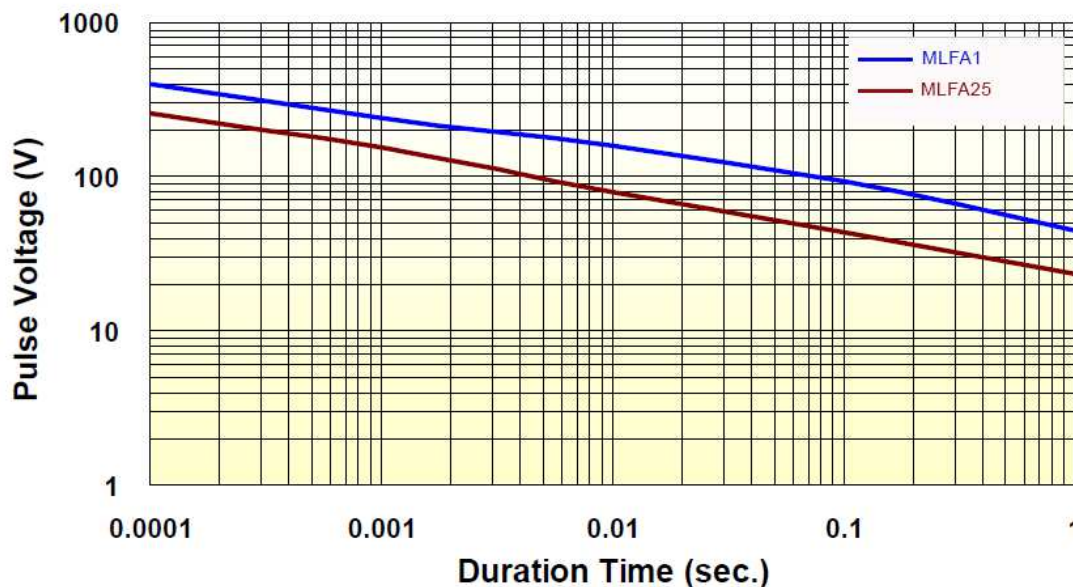


**Frequency Behavior**

Resistors are designed to function according to Ohmic laws. This is basically true of resistors for frequencies up to 100 kHz. At higher frequencies, there is an additional contribution to the impedance by an ideal resistor switched in series with a coil and both switched parallel to a capacitor. The values of the capacitance and inductance are mainly determined by the dimensions of the terminations and the conductive path length. The environment surrounding components has a large influence on the behavior of the component on the printed-circuit board.


MLFA25 Frequency versus Impedance

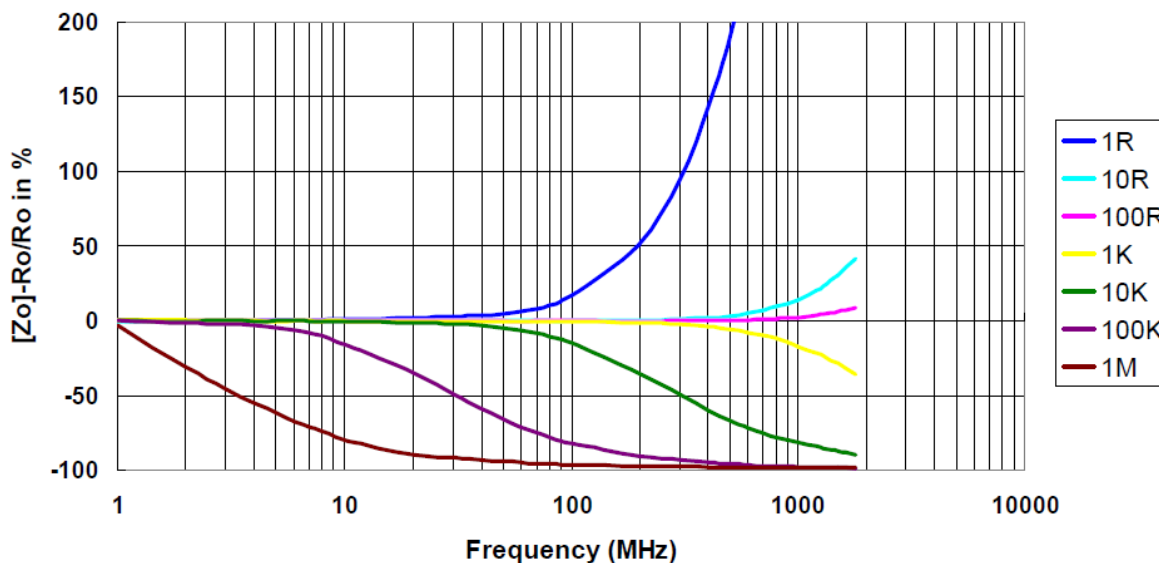


MLFA25 Frequency versus Phase Angle

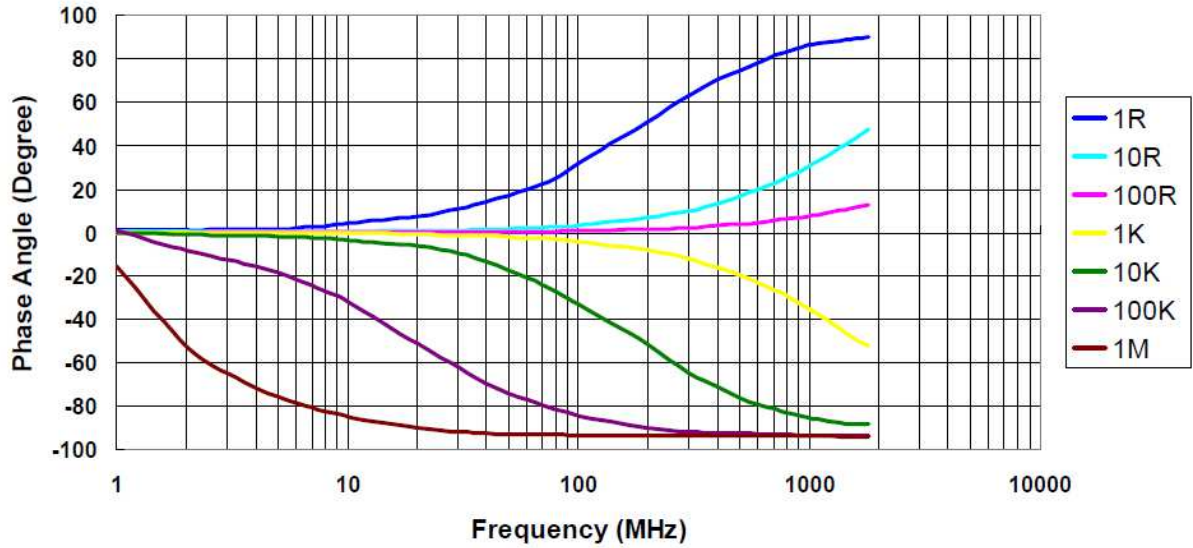

MLFA1 Frequency versus Impedance

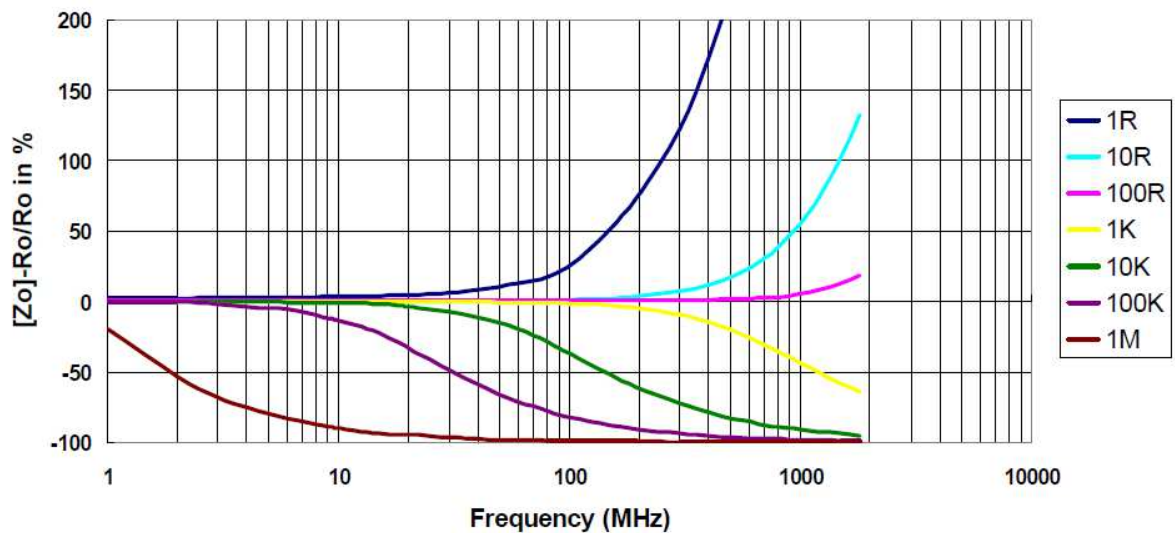


MLFA1 Frequency versus Phase Angle

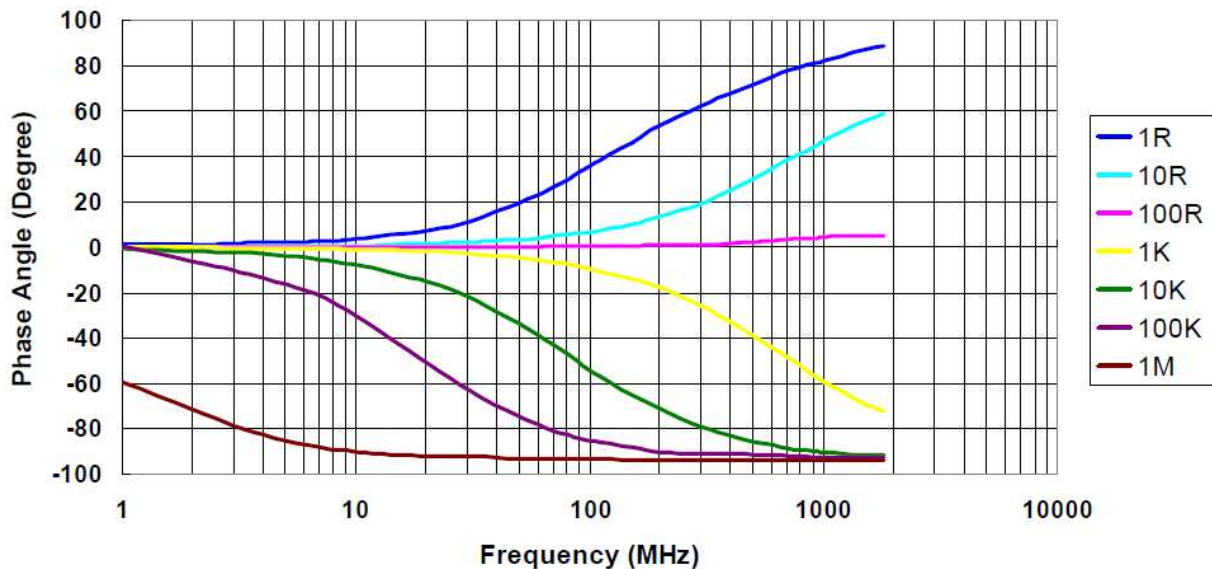


**Lightning Surge**

Resistors are tested in accordance with IEC 60 115-1 using both 1.2/50µs and 10/700µs pulse shapes. The limit of acceptance is a shift in resistance of less than 0.5% from the initial value.


MLFA13 1.2/50µs Lightning Surge

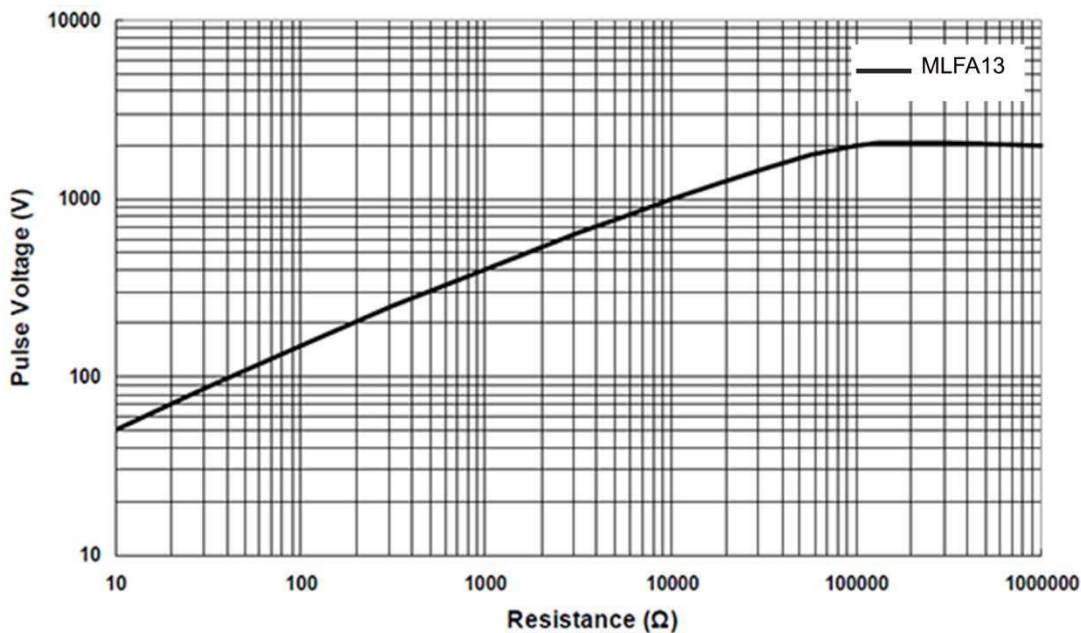

MLFA13 10/700 $\mu$ s Lightning Surge

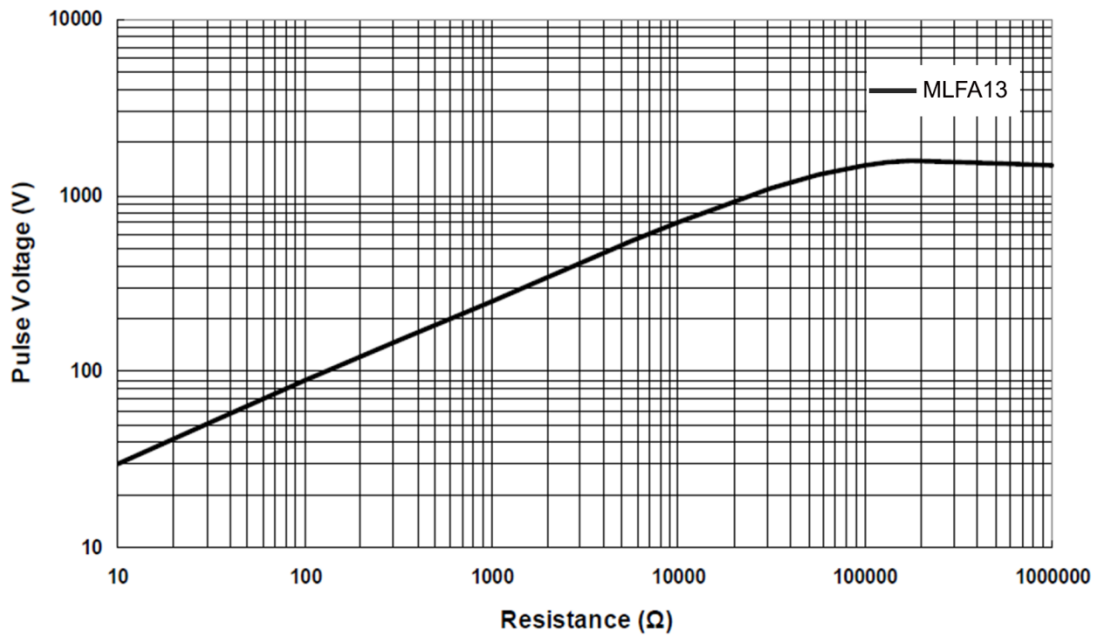


MLFA25/MLFA1 1.2/50 $\mu$ s Lightning Surge

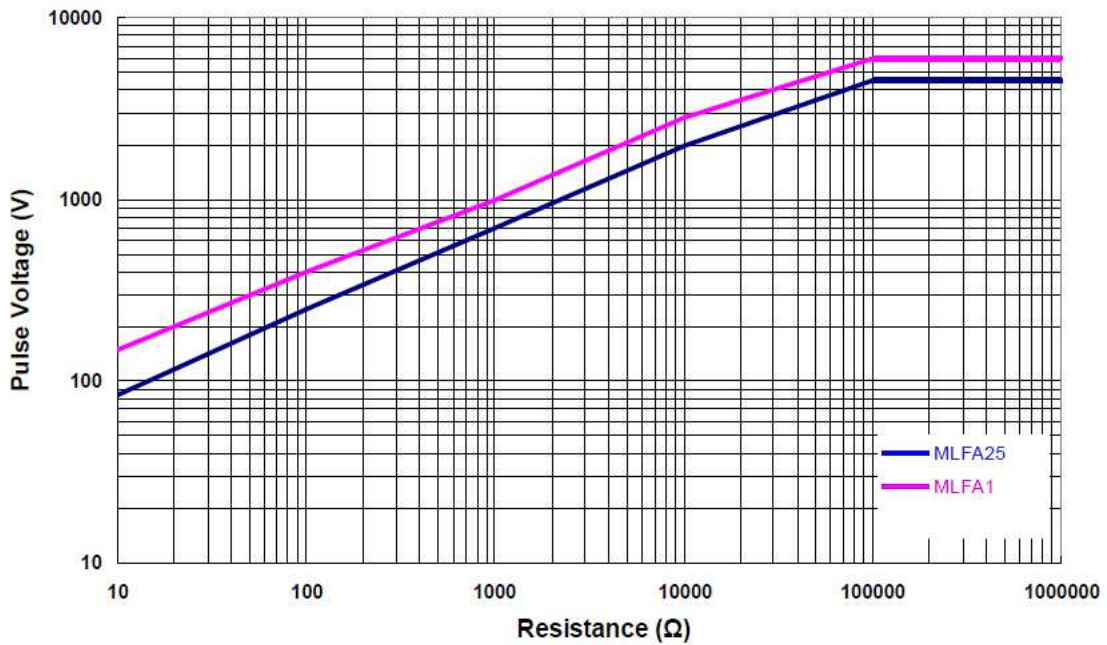



10/700µs Lightning Surge

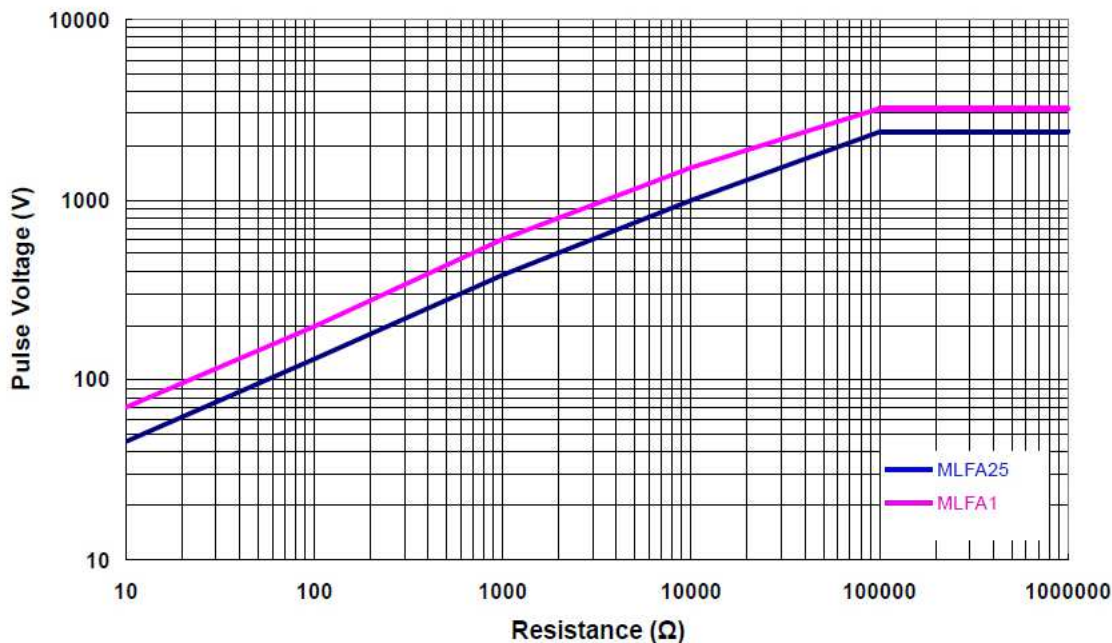

**RoHS Compliance**

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 2). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament.

| RoHS Compliance Status  |   |                            |                                |                                   |  |                                       |
|-------------------------|---|----------------------------|--------------------------------|-----------------------------------|--|---------------------------------------|
| Standard Product Series | Description                                   | Package / Termination Type | Standard Series RoHS Compliant | Lead-Free Termination Composition | Lead-Free Mfg. Effective Date (Std Product Series) | Lead-Free Effective Date Code (YY/WW) |
| MLFA                    | Metal Film Melf Resistor (AEC-Q200 Qualified) | SMD                        | YES                            | 100% Matte Sn                     | Always   | Always                                |

**Conflict Metals” Commitment**

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the Eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

**Compliance to “REACH”**

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

**Environmental Policy**

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

**How to Order**

|          |          |          |          |          |          |          |          |          |          |          |          |          |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| 1        | 2        | 3        | 4        | 5        | 6        | 7        | 8        | 10       | 11       | 12       | 13       | 14       |
| <b>M</b> | <b>L</b> | <b>F</b> | <b>A</b> | <b>2</b> | <b>5</b> | <b>F</b> | <b>T</b> | <b>S</b> | <b>1</b> | <b>0</b> | <b>0</b> | <b>K</b> |

|                       |                     |      |       |                  |        |          |                  |                         |              |          |            |        |   |
|-----------------------|---------------------|------|-------|------------------|--------|----------|------------------|-------------------------|--------------|----------|------------|--------|---|
| <b>Product Series</b> | <b>Power Rating</b> |      |       | <b>Tolerance</b> |        |          | <b>Packaging</b> |                         |              |          | <b>TCR</b> |        | <b>Resistance Value</b>   |
| MLFA                  | Code                | Size | Power | Code             | Tol    | Value    | Code             | Description             | Product Code | Quantity | Code       | ppm    |   |
|                       | 13                  | 0102 | 0.3W  | B                | 0.1%   | E96, E24 | T                | 7" Reel<br>Plastic Tape | MLFA13       | 3,000    | Z          | jumper | Four characters with the multiplier used as the decimal holder.<br><br>1 ohm = 1R00<br>100 Kohm = 100K<br>1 Mohm = 1M00<br>zero ohm jumper = 0R00 |
|                       | 25                  | 0204 | 0.4W  | D                | 0.5%   |          |                  |                         | MLFA25       |          | S          | 15     |   |
|                       | 1                   | 0207 | 1W    | F                | 1%     | E24      |                  |                         | MLFA1        | 2,000    | E          | 25     |   |
|                       |                     |      |       | J                | 5%     |          |                  |                         |              |          | C          | 50     |   |
|                       |                     |      |       | Z                | Jumper |          |                  |                         |              |          | D          | 100    |   |