



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PANDUIT PART NO.	PACKAGE QTY.	MAX BUNDLE DIA	LENGTH <sup>Ⓓ</sup> L ±.3 [ 7 ]
MLT2H-LP321	50	2" [ 51 ]	7.9" [ 201 ]
MLT4H-LP321	50	4" [ 102 ]	14.3" [ 362 ]
MLT6H-LP321	50	6" [ 152 ]	20.5" [ 521 ]
MLT8H-LP321	50	8" [ 203 ]	26.8" [ 679 ]

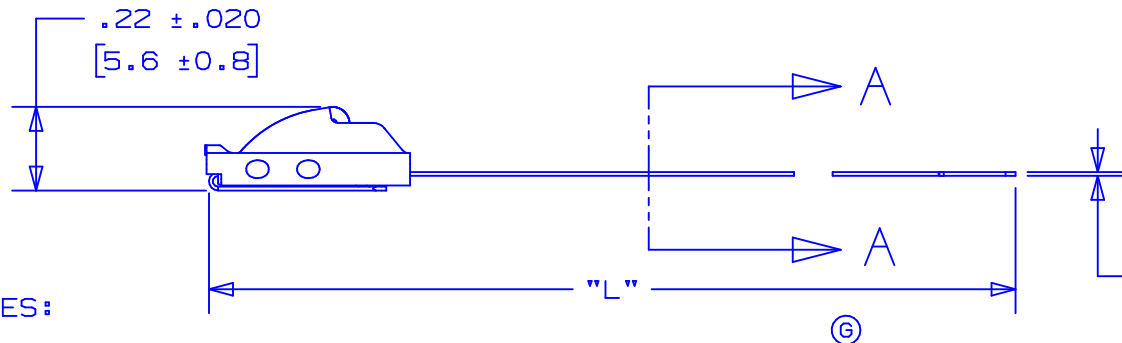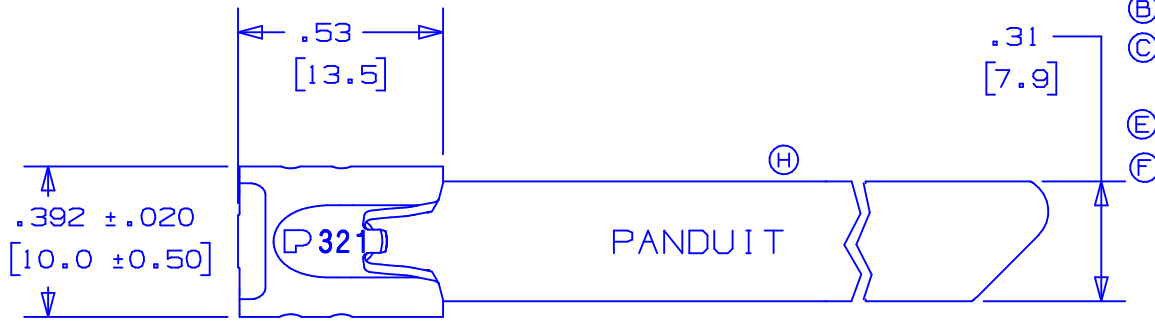

SECTION A - A  
SCALE: 6x

NOTES:

- 1.) APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
- 2.) MINIMUM LOOP TENSILE STRENGTH - 450 LBS. (2000 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- 3.) [ ] DENOTES DIMENSION IN MILLIMETERS
- 4.) TOLERANCES:
  - .XXX = ±.010 [ .25 ]
  - .XX = ±.02 [ .5 ]
  - .X = ±.03 [ .8 ]
  - ANGLES = ±2°
- 5.) MATERIAL: 321 STAINLESS STEEL

04	7/04	JAMB		Ⓚ REMOVED "ASTM NO.1 FULL RADIUS" AND REPLACED WITH "FULLY ROUNDED".	11902		
03	7/04	JAMB	DPN	Ⓛ RADIUS EDGES: "AISI" CHANGED TO "ASTM"	11898	CCH	DPN JJB
02	11/03	JAMB	DPN	Ⓢ ADDED APPLICATION TOOL "ST3MT". Ⓜ REMOVED "321" DESIGNATION FROM PANDUIT I.D.	11292	CCH	JJB
01	6/03	JAMB	DPN	Ⓜ MIN LOOP TENSILE STRENGTH WAS 250 LBS. (1112 NEWTONS) Ⓛ MAX. BUNDLE DIA. [ mm ] WAS [ 50 ] Ⓢ MAX. BUNDLE DIA [ mm ] WAS [ 101 ], LGTH. WAS 14.2 [ 361 ] Ⓢ TOL. WAS ±.2 [ 5 ]	10568	CCH	JJB
--	---	---	---	Ⓢ LGTH. [ mm ] WAS [ 681 ] Ⓢ REMOVED PART NO. MLT10H-LP321	-----	---	---
00	9/02	JAMB	DPN	RELEASED	10059	CCH	JJB

**PANDUIT**

CORP. TINLEY PARK, ILLINOIS

METAL LOCKING TIE  
HEAVY SERIES -321 STAINLESS STEEL

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY	CHK'D	SCALE	DRAWING NO.
								JAMB	DPN	2x	S41118

S41118\_04