



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS [889 NEWTONS]
WHEN TESTED ON A 1.5" MANDREL
3. BRACKETS [] DENOTES DIMENSIONS IN MILLIMETERS
AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
.XXX = ±.010 [.25] .XX = ±.02 [.5]
.X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L=±.3 [7]
MLT1S-CP	1" [25]	100	5.0" [127]
MLT2S-CP	2" [51]	100	7.9" [201]
MLT2.7S-CP	2.7" [69]	100	10.2" [259]
MLT4S-CP	4" [102]	100	14.3" [362]
MLT6S-CP	6" [152]	100	20.5" [521]
MLT8S-CP	8" [203]	100	26.8" [679]
MLT10S-CP	10" [254]	100	33.0" [838]
MLT12S-Q	12" [304]	25	39.3" [998]
MLT14S-Q	14" [355]	25	45.5" [1156]
MLT15S-Q	15" [380]	25	49.2" [1250]
MLT2S-L	2" [51]	50	7.9" [201]
MLT4S-L	4" [102]	50	14.3" [362]

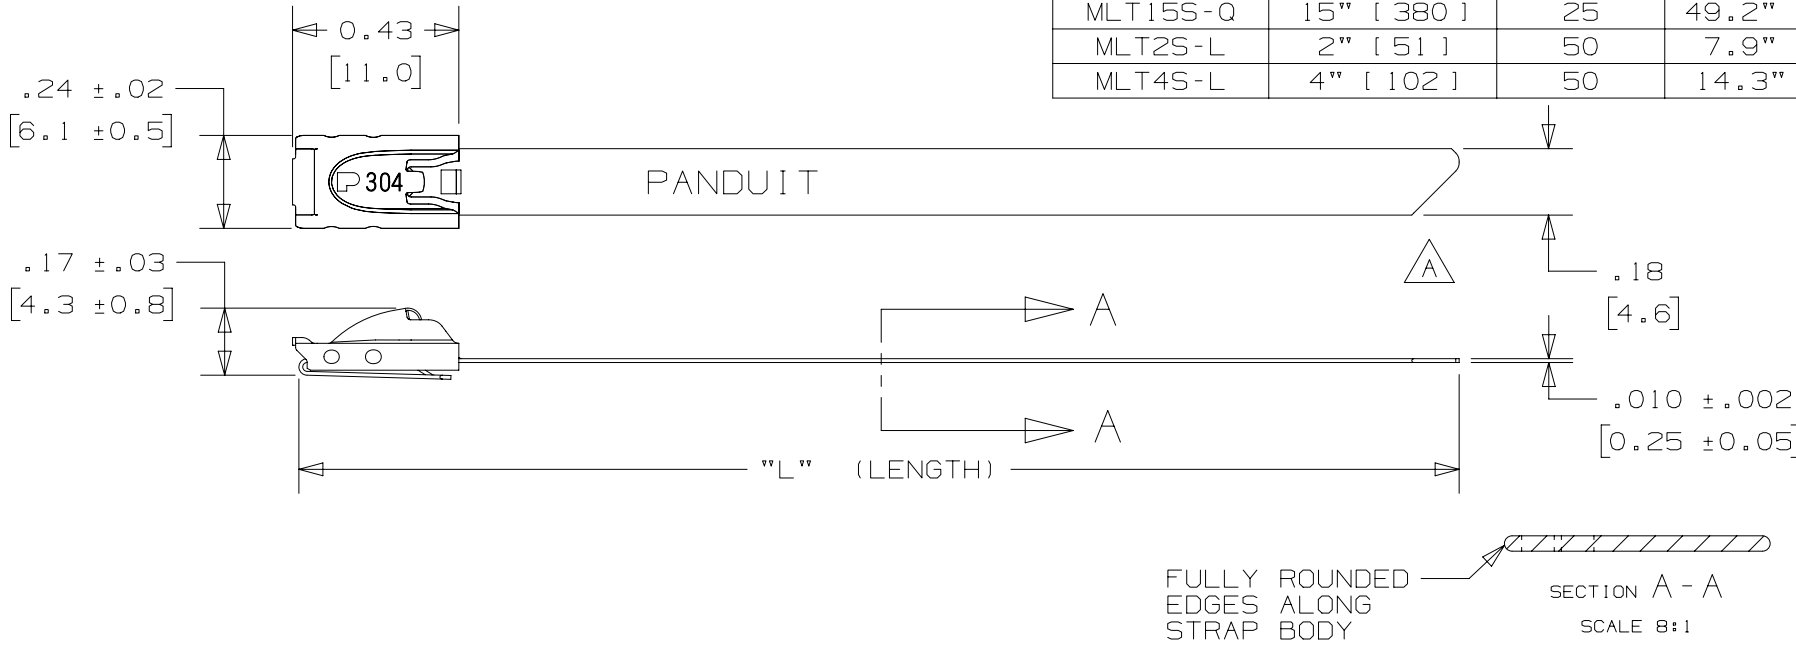

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
13	10.09.15	BDK	SKB	RGRO	A. CHANGED BODY TIP CONFIGURATION	N41119BS_DC
12	05.04.15	BDK	SKB	RGRO	TOLERANCES WERE IN NOTES REMOVED TITLE BLOCK TOLERANCES	N41119BS_DC
11A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01037
10A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	----

TITLE		METAL LOCKING TIE STANDARD SERIES 304 STAINLESS STEEL		
ITEM REVISION NAME		CUSTOMER DRAWING		
DATASET FILE NAME		N41119BS/13		
MATERIAL:		PANDUIT		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		304 STAINLESS STEEL		
DRAWING NUMBER:		N41119BS_DC		
DRAWN BY	DATE	CHK	SCALE	SIZE
JAMB	2/12	DPN	2:1	A