



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	MAX BUNDLE DIAMETER	"L" LENGTH ±.3" [ 7 ]
MLTC2H-LP316	2" [ 51 ]	7.9" [ 201 ]
MLTC2.7H-LP316	2.7" [ 69 ]	10.15" [ 258 ]
MLTC4H-LP316	4" [ 102 ]	14.3" [ 362 ]
MLTC6H-LP316	6" [ 152 ]	20.5" [ 521 ]
MLTC8H-LP316	8" [ 203 ]	26.8" [ 679 ]
MLTC10H-LP316	10" [ 254 ]	33.0" [ 838 ]

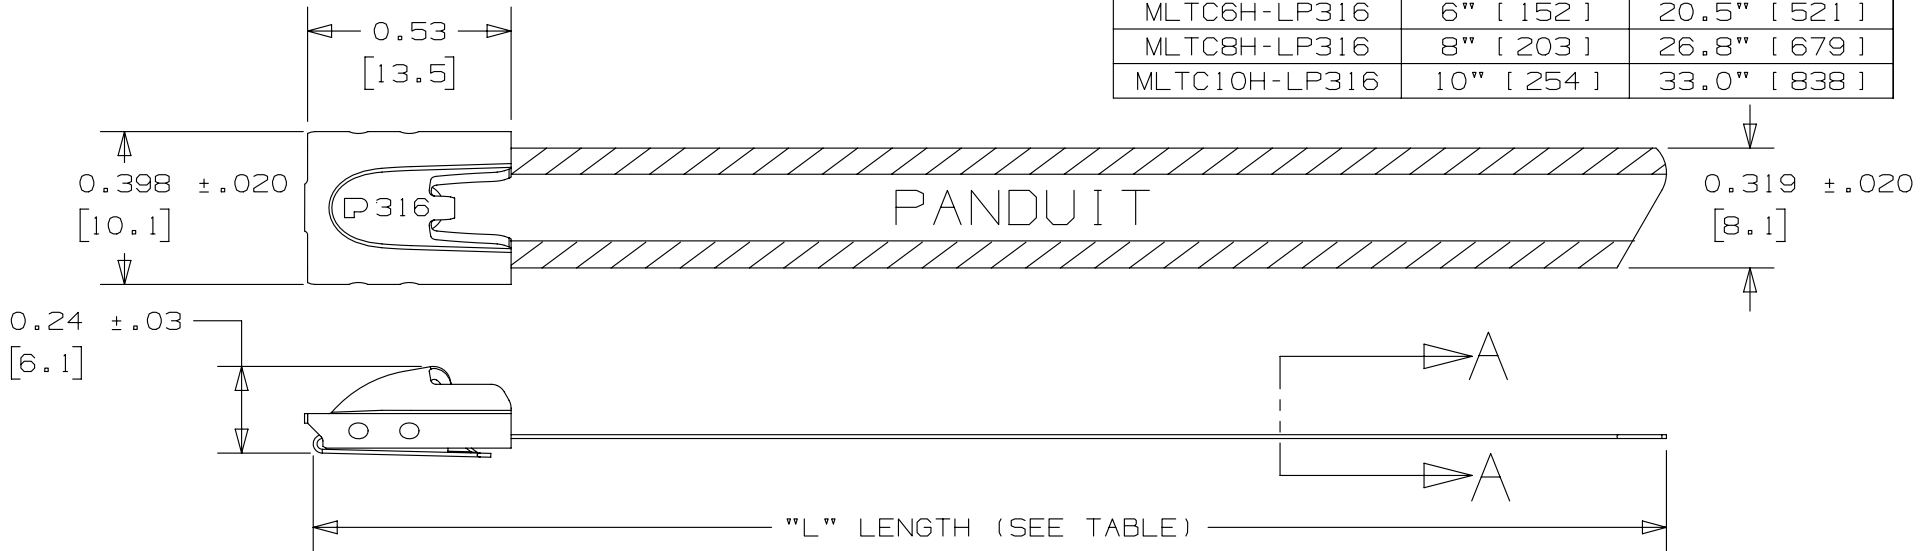

- NOTES:
- APPLICATION TOOLS - GS4MT, PPTMT, HTMT, & ST3MT
  - MINIMUM LOOP TENSILE STRENGTH - 250 lbs. [ 1112 NEWTONS ]
  - BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  - TOLERANCES:  
 .X = ±.030 [ .8 ]    .XX = ±.020 [ .5 ]  
 .XXX = ±.010 [ .25 ]
  - MATERIAL: 316 STAINLESS STEEL
  - COATING: NYLON 11  
 COATING THICKNESS: .003" / .005" [ 0.08-0.13 ] PER SIDE

316 STAINLESS STEEL (.010 REF)  
 NYLON 11 COATING  
 0.018 ±0.002  
 [ 0.5 ±0.1 ]  
 SECTION A-A  
 SCALE 4:1

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE			MATERIAL:					
							SELECTIVELY COATED METAL LOCKING TIE HEAVY SERIES WITH NYLON 11 COATED BODY			SEE NOTES					
							CUSTOMER DRAWING			<b>PANDUIT</b>					
							ITEM REVISION NAME N41140BS/08								
							DATASET FILE NAME N41140BS_DC/08A			DRAWING NUMBER: N41140BS_DC					
08A	7/14	JHNU	SKB	RGB	ADDED .010 REF TO SECTION A-A ADDED THICKNESS DIMENSION TO SECTION A-A	SSECN01155	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]								
07A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01042	.x ± .1 [ 2.54 ]	.xxx ± .005 [ .127 ]							
06A	2/12	MIM	RGRO	---	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	-----	.xx ± .01 [ .25 ]	ANGLES ± 5 °							
							THIRD ANGLE PROJECTION								
							DRAWN BY/DATE JAMB 2/12			CHK/SCALE DPN 2:1			SHT 1 OF 1		SIZE A