



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






2-16GHz, Power-Selectable Wideband Amplifier

Features

- Power-selectable from 7 to 18dBm P_{1dB} by choosing bond option
- Gain varies <1.2dB from -40°C to +85°C
- Gain of ~10-14dB and ~28dBm OIP3 at the highest power option
- Self-biased with single positive supply
- Input and Output matched to 50Ω
- 0.76mm x 0.66mm x 0.1mm die size

Applications

- Instrumentation
- Electronic warfare
- Microwave communications
- Radar

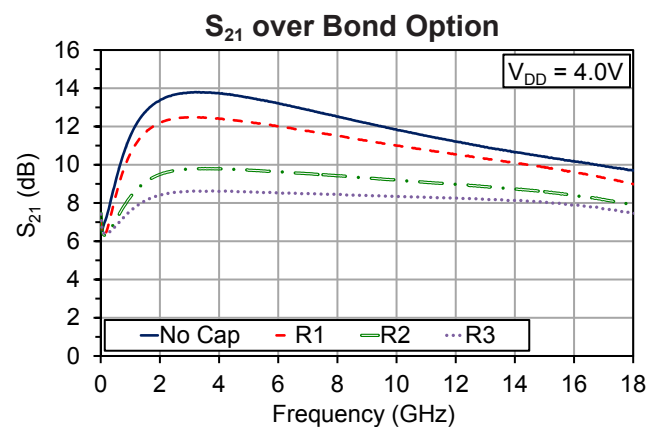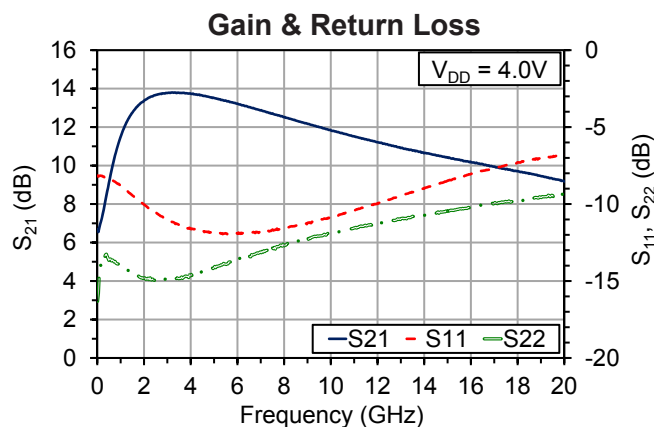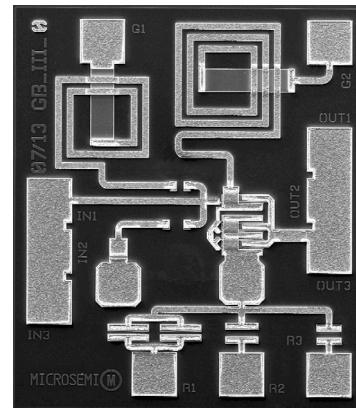

RF Specifications (CW, Typical Device, RF Probe): $T_A = 25^\circ\text{C}$, $V_{DD} = 4\text{V}^1$

Bond Option	ID	Gain	P1dB	OIP3
None	95	11.5	18.0	26.0
R1 to Ground	65	10.8	15.5	23.5 est
R2 to Ground	36	9.0	7.5	15.5 est
R3 to Ground	23	8.0	5.5	13.5 est

¹ Device is intended for small-signal applications only

Table 1: Absolute Maximum Ratings, Not Simultaneous

Parameter	Value	Units
Drain Voltage (V_D)	+4.5	V
Input Power (P_{IN})	+19	dBm
Operating Channel Temperature	175 ²	°C
Operating Ambient Temperature (T_A)	-55 to +85	°C
Storage Temperature	-65 to 150	°C
Thermal Resistance, Channel to Die Backside	150	°C/W





Caution, ESD Sensitive Device

² MTTF ~ 10⁷ hours at $T_{channel} = 175^\circ\text{C}$. Device is intended for small-signal applications only
 Note: Bare die is non-hermetic; recommend to use in an environmentally sealed package.

Table 2: Specifications (CW, 100% Test): $T_A = 25^\circ\text{C}$, $V_{DD} = 4\text{V}$

Parameter	Min	Typ	Max	Units
I_{DD} , bond option = "none"	45	95	135	mA

RF Probe Measurement Set-Up With Reference Planes³

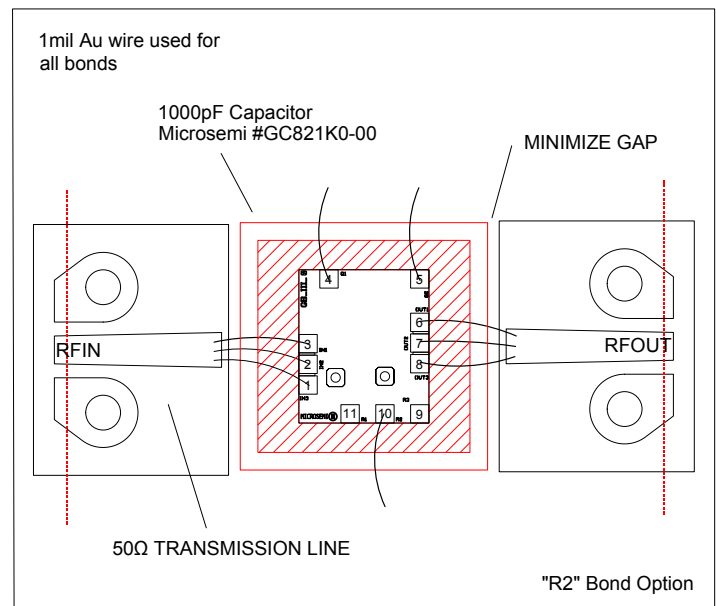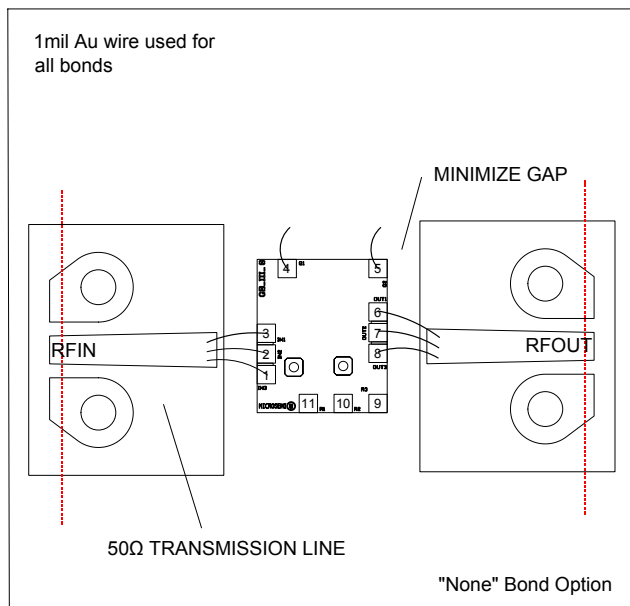

To use the "none" bonding option, attach the die directly to the baseplate.


To use the "R1", "R2" or "R3" bonding options, mount the die on top of a capacitor to float the source and bond the appropriate pad to ground.

³ Reference planes are the same for S-parameter files downloadable on www.microsemi.com/mmics


Typical Performance, RF Probe

$V_{DD} = 4V$, $I_{DD} = 95mA$, $T_A = 25^\circ C$, bond option = "none" unless otherwise noted


S_{11} Over V_{DD}

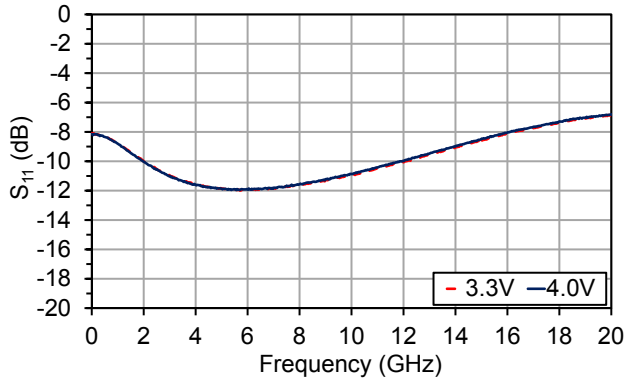


S_{22} Over V_{DD}

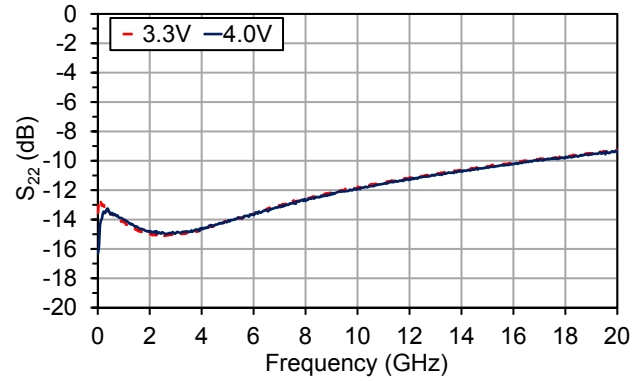


S_{11} Over Temperature, $V_{DD} = 3.3V$

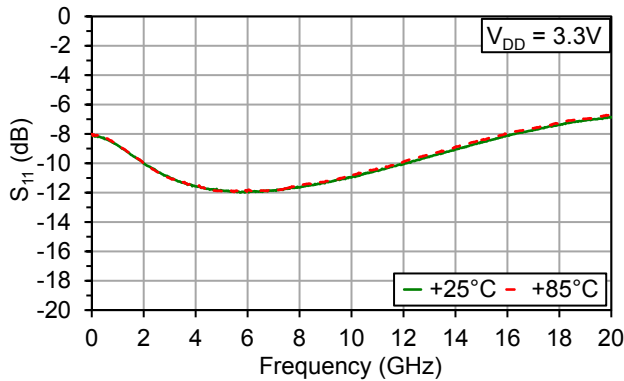


S_{22} Over Temperature, $V_{DD} = 3.3V$

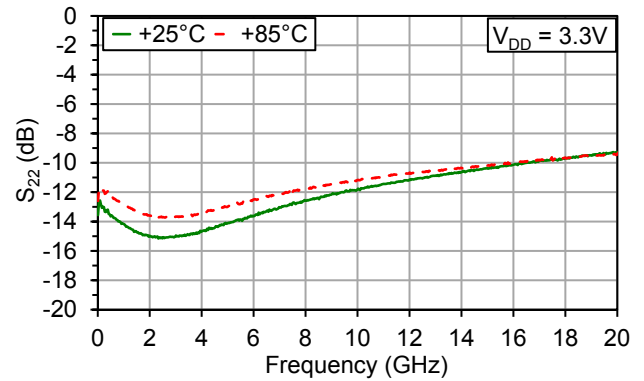

S_{11} Over Temperature, $V_{DD} = 4.0V$






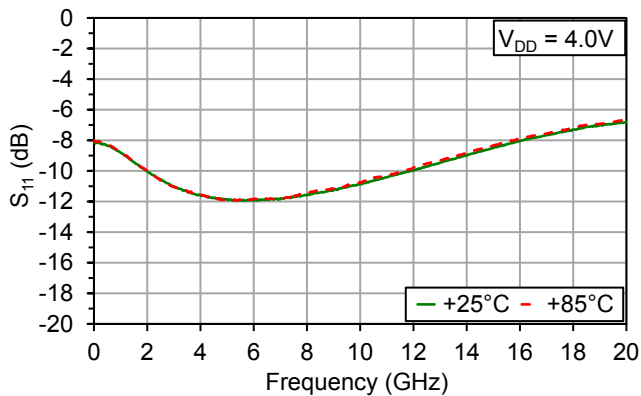


S_{22} Over Temperature, $V_{DD} = 4.0V$

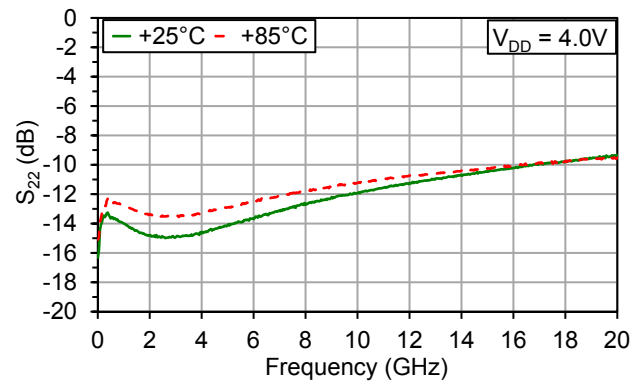







Typical Performance, RF Probe

$V_{DD} = 4V$, $I_{DD} = 95mA$, $T_A = 25^\circ C$, bond option = "none" unless otherwise noted

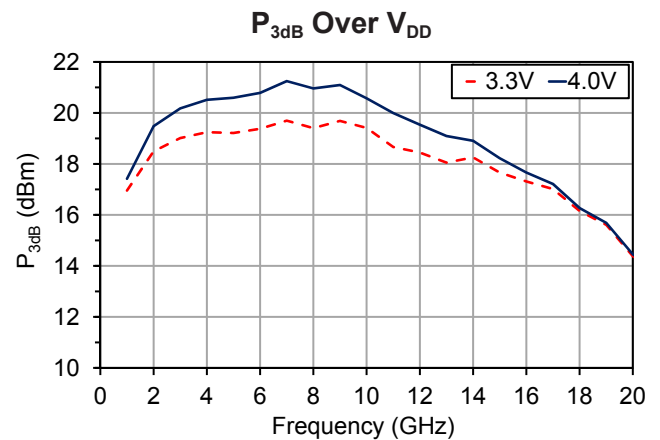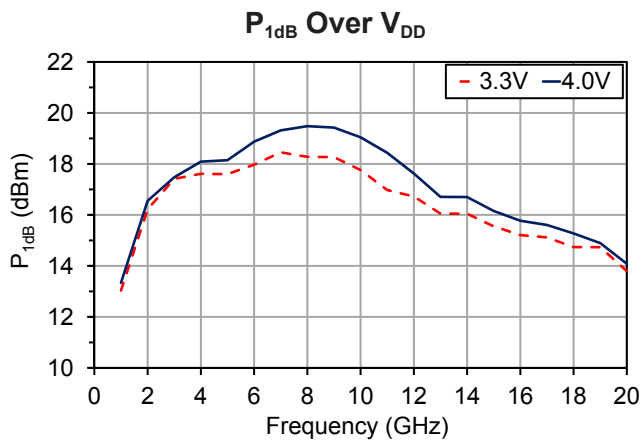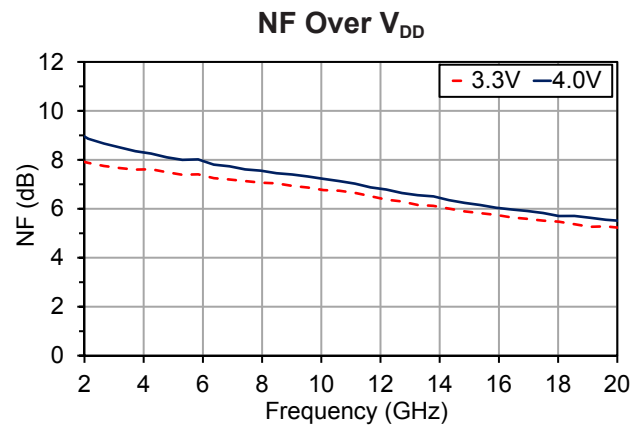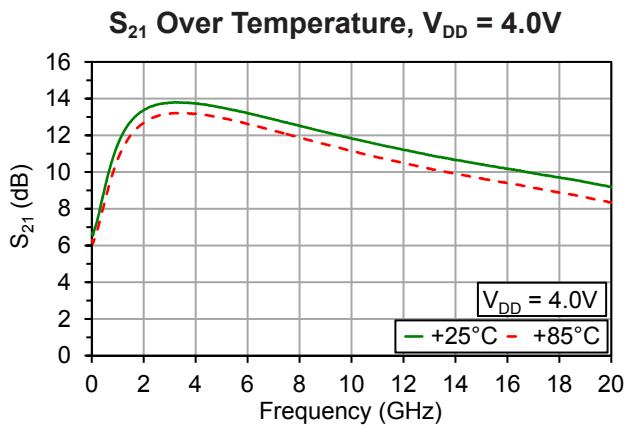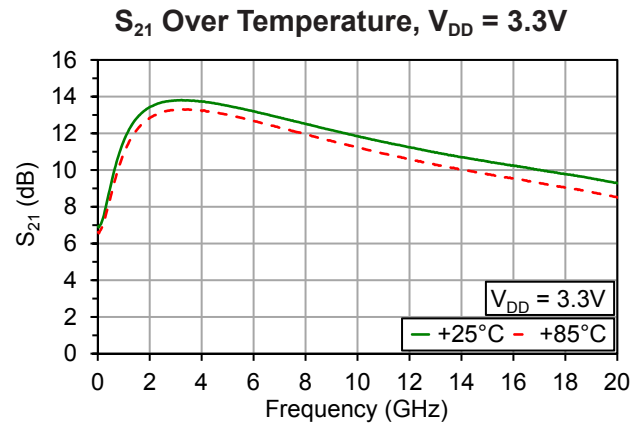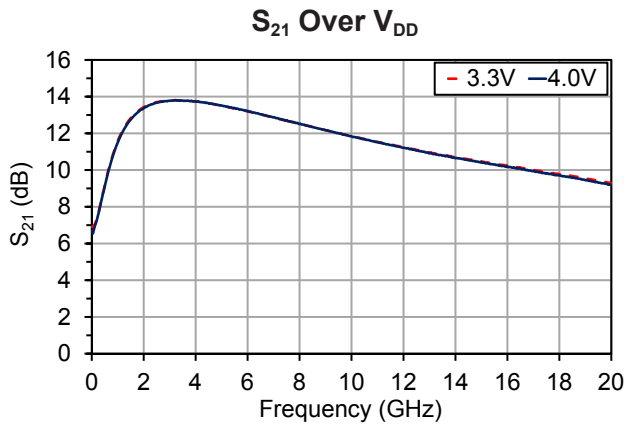

Typical Performance, RF Probe


$V_{DD} = 4V$, $I_{DD} = 95mA$, $T_A = 25^\circ C$, bond option = "none" unless otherwise noted

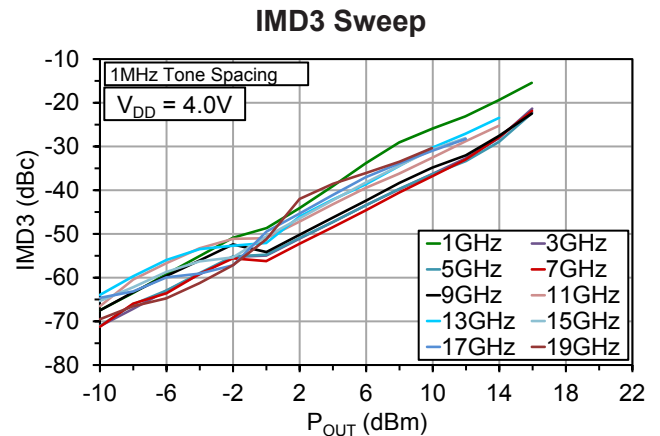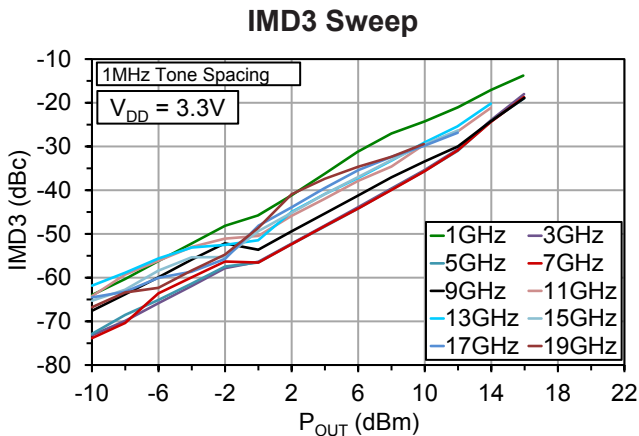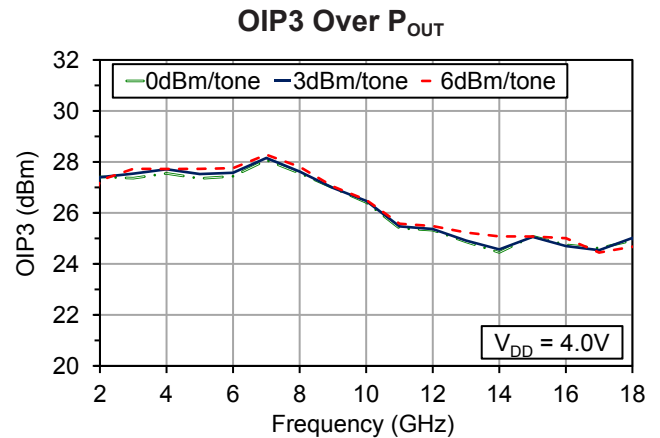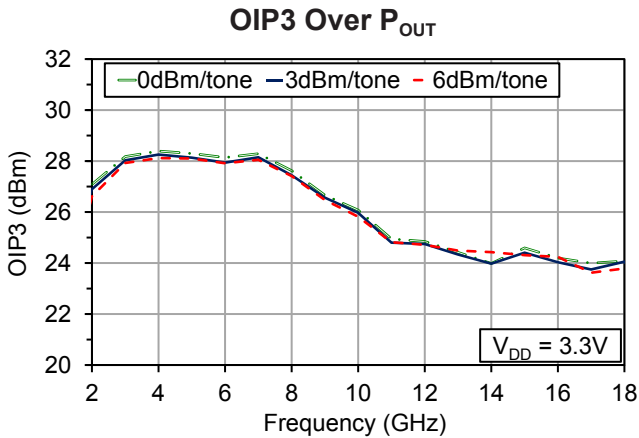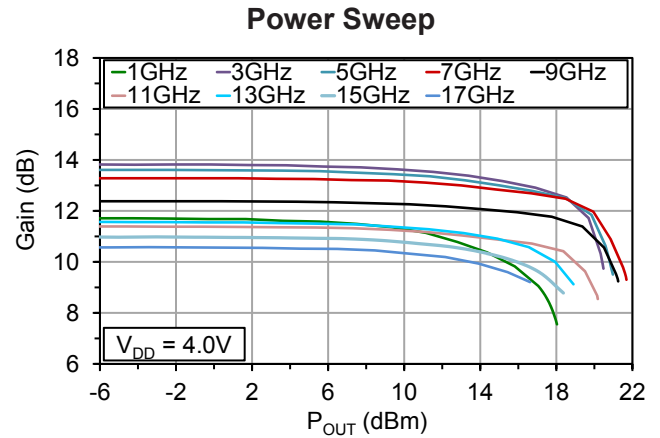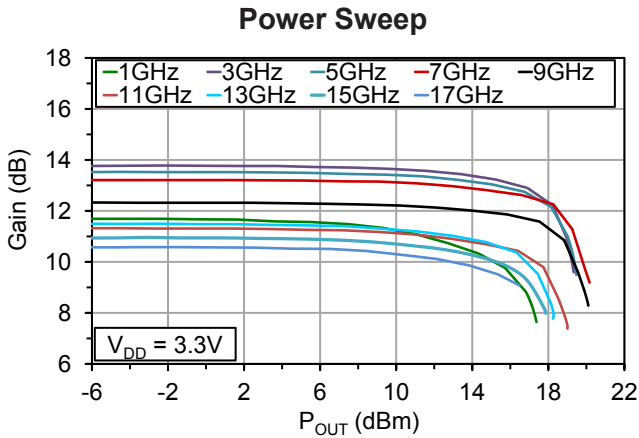


Typical Performance, RF Probe

$V_{DD} = 4V$, $I_{DD} = 95mA$, $T_A = 25^\circ C$, performance over bond option


S_{11} Over Bonding Option

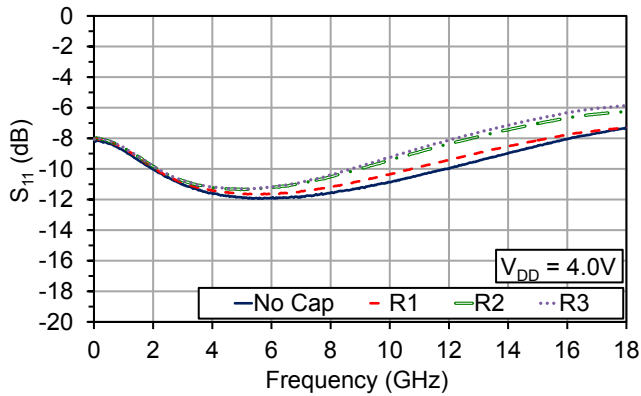


S_{22} Over Bonding Option

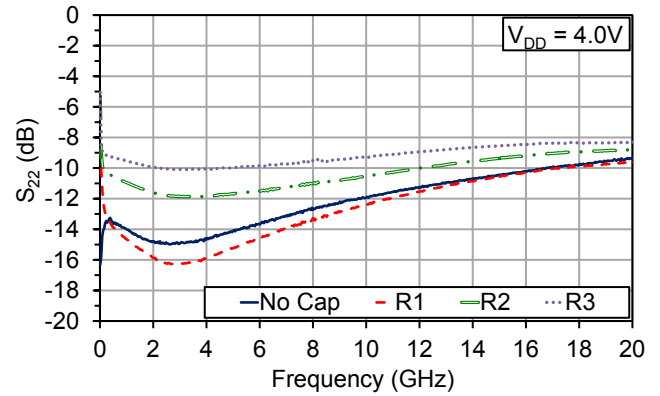


S_{21} Over Bonding Option

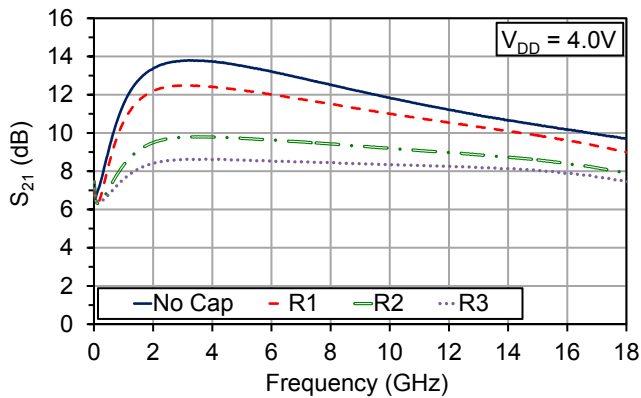

P_{1dB} Over Bonding Option

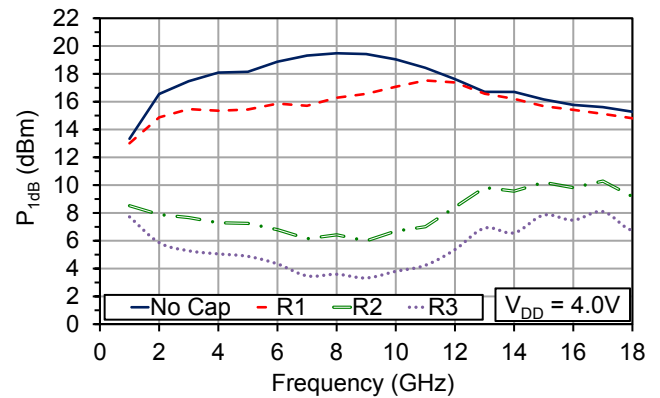


P_{3dB} Over Bonding Option

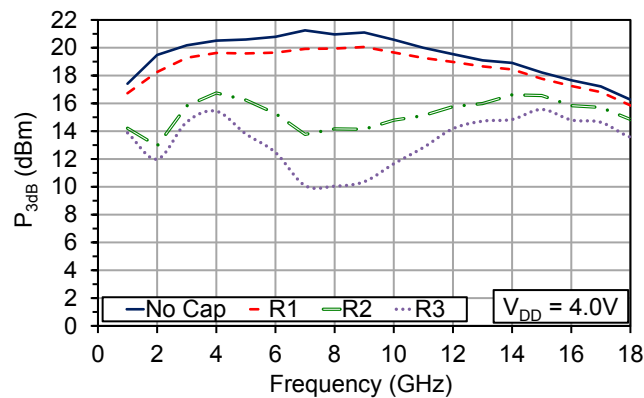

Connectorized Test Fixture


With SMK 2.92mm Connectors

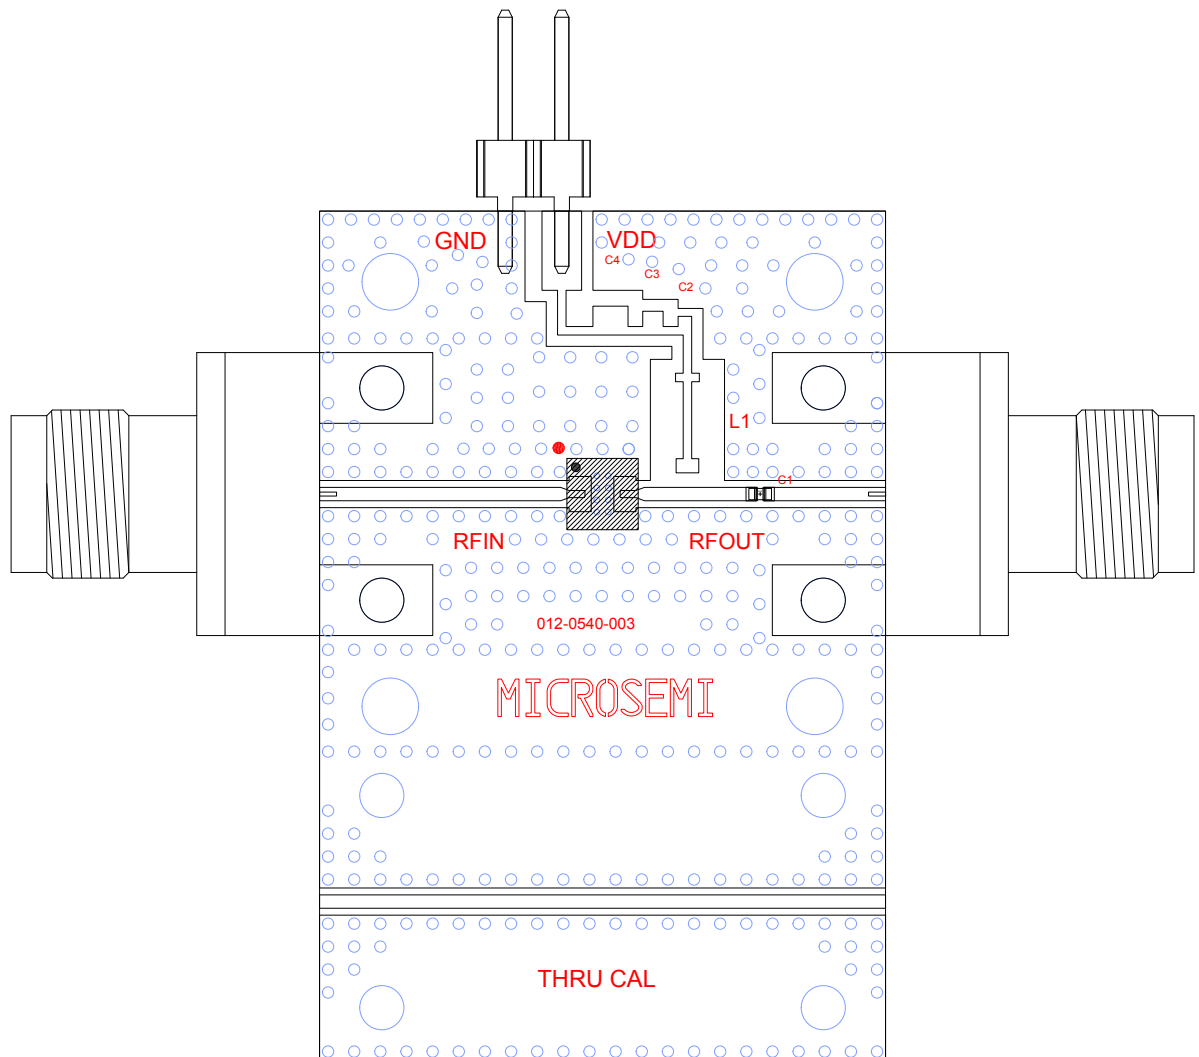


Typical Performance, Connectorized Test Fixture

$V_{DD} = 4V$, $I_{DD} = 95mA$, $T_A = 25^\circ C$, bond option = "none" unless otherwise noted


S_{11} Over Temperature

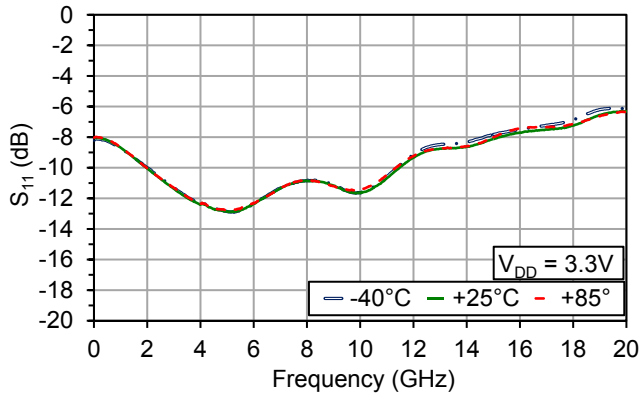


S_{11} Over Temperature

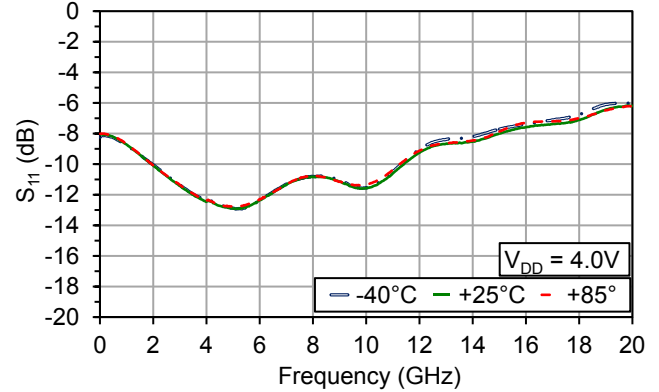


S_{22} Over Temperature

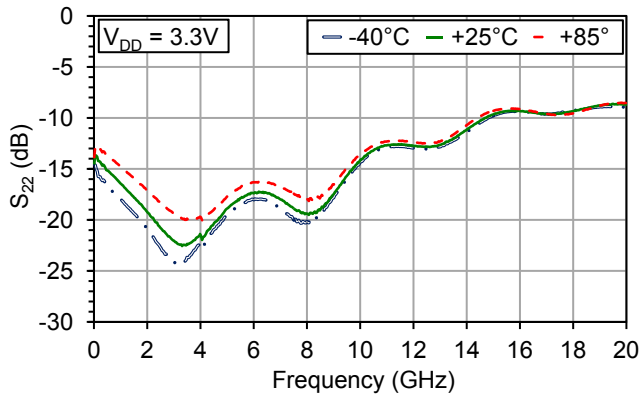


S_{22} Over Temperature

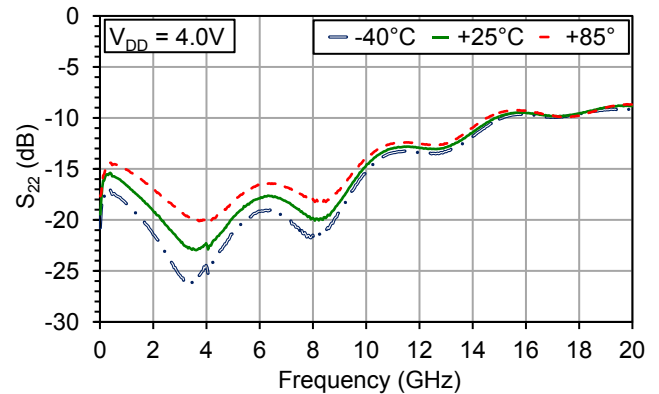

S_{21} Over Temperature


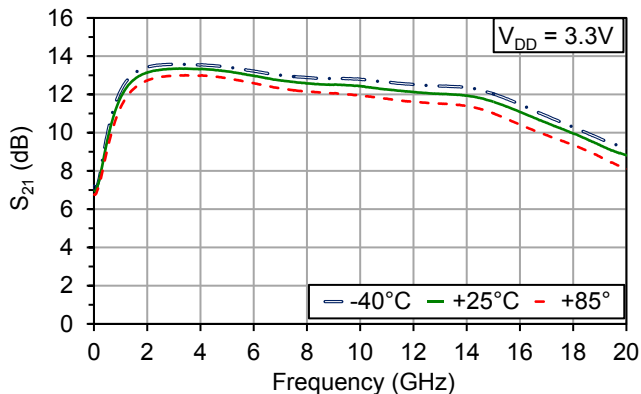


S_{21} Over Temperature

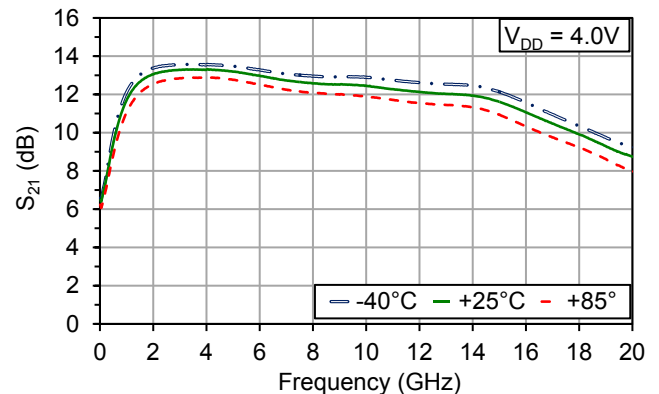

Typical Performance, Connectorized Test Fixture

$V_{DD} = 4V$, $I_{DD} = 95mA$, $T_A = 25^\circ C$, bond option = "none" unless otherwise noted

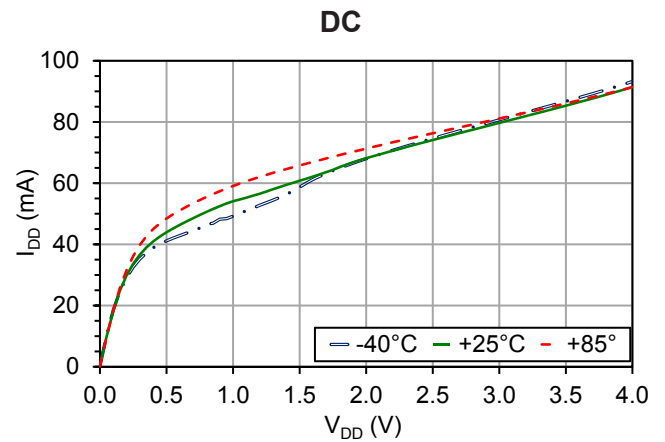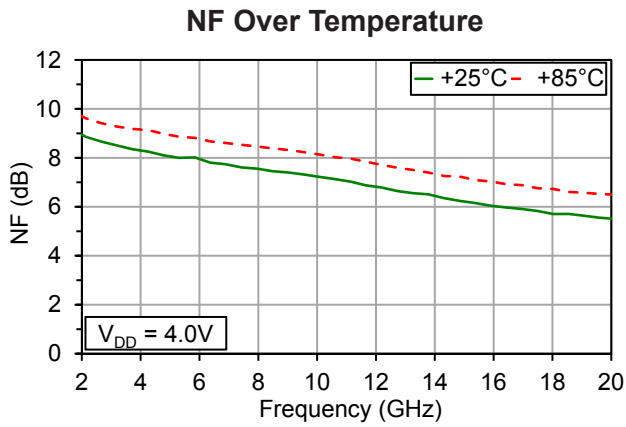

Chip layout showing pad locations.

All dimensions are in microns. Die thickness is 100 microns. Backside metal is gold, bond pad metal is gold.
 Refer to Die Handling Application Note MM-APP-0001 (visit www.microsemi.com/mmics).
 See Page 2 for example bonding configurations.

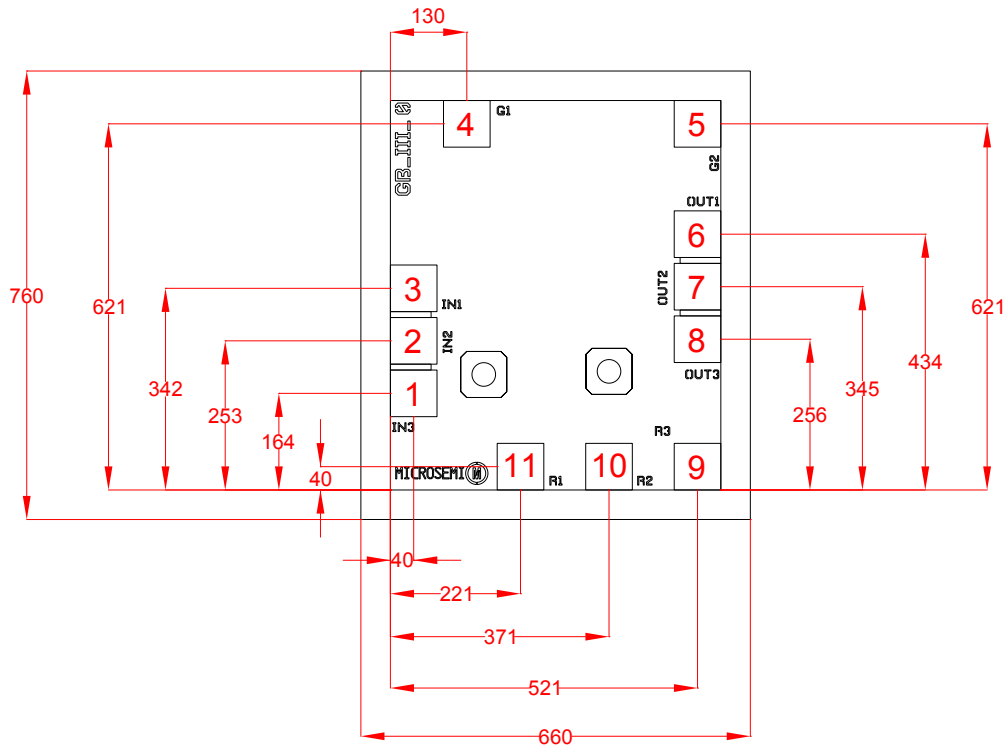


Table 3: Pad Descriptions

Pad #	Description	Pad Dimensions (μm)
1, 2, 3	RF _{IN} , DC coupled	75 x 75
4, 5	Ground	75 x 75
6, 7, 8	RF _{OUT} , DC coupled	75 x 75
9	R3 bond option	75 x 75
10	R2 bond option	75 x 75
11	R1 bond option	75 x 75
Die Backside	Refer to bonding option on page 2	-

Biasing

MMA017AA is a self-biased device with a single positive supply. Apply V_{DD} to RF_{OUT}.

Information contained in this document is proprietary to Microsemi. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.

Microsemi Corporate Headquarters

One Enterprise, Aliso Viejo CA 92656 USA
Within the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense and security, aerospace, and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs, and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif. and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

© 2014 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.