



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us




Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

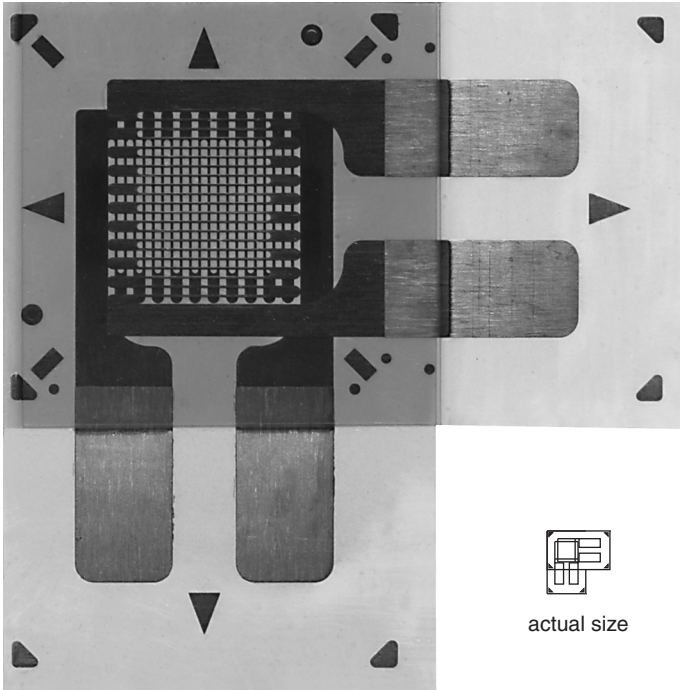

## General Purpose Strain Gages - Tee Rosette

<b>GAGE PATTERN DATA</b>					
 <p style="text-align: center; margin-top: 10px;">                       actual size                 </p>	<b>GAGE DESIGNATION</b>  See Note 1	<b>RESISTANCE (OHMS)</b>  120 ± 0.5% 350 ± 0.5%	<b>OPTIONS AVAILABLE</b>		
	CEA-XX-062WT-120 CEA-XX-062WT-350	<b>DESCRIPTION</b>  Small two-element 90° stacked rosette. Exposed solder tab area 0.07 x 0.04 in [1.8 x 1.0 mm]. Maximum operating temperature +150°F [+65°C].		 <b>RoHS</b> COMPLIANT	
	<b>GAGE DIMENSIONS</b>			Legend: ES = Each Section CP = Complete Pattern S = Section (S1 = Sec 1) M = Matrix	
<b>Gage Length</b>	<b>Overall Length</b>	<b>Grid Width</b>	<b>Overall Width</b>	<b>Matrix Length</b>	<b>Matrix Width</b>
0.062 ES	0.235 CP	0.120 ES	0.235 CP	0.33	0.33
1.57 ES	5.97 CP	3.05 ES	5.97 CP	8.3	8.3

<b>GAGE SERIES DATA</b>			
See Gage Series data sheet for complete specifications.			
<b>Series</b>	<b>Description</b>	<b>Strain Range</b>	<b>Temperature Range</b>
CEA	Universal general-purpose strain gages.	±3%	-100° to +150°F [-75° to +65°C]

**Note 1:** Insert desired S-T-C number in spaces marked XX.