



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

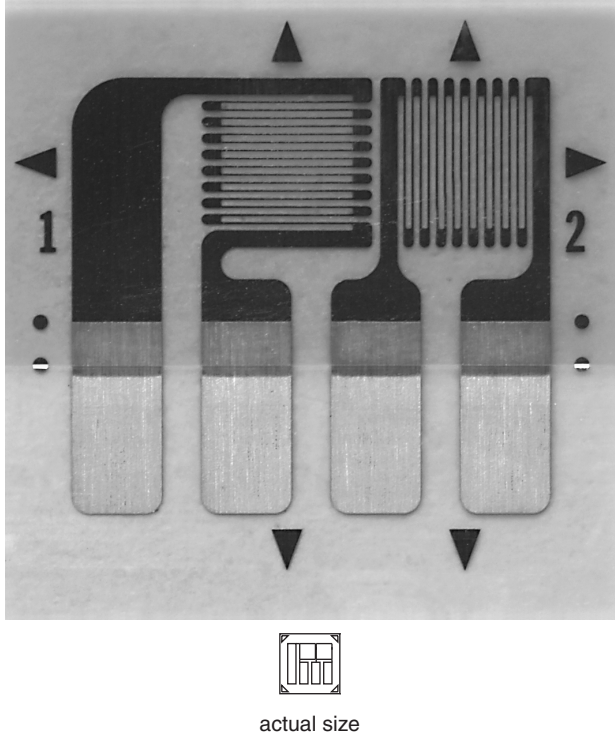
Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



General Purpose Strain Gages - Tee Rosette

| GAGE PATTERN DATA | | | | | |
|---|---|-------------------|---|-------------------------------------|--|
|  | | | GAGE DESIGNATION See Note 1 | RESISTANCE (OHMS) | OPTIONS AVAILABLE See Note 2 |
| | | | CEA-XX-062UT-120 CEA-XX-062UT-350 | 120 ± 0.4% 350 ± 0.4% | P2 P2 |
| DESCRIPTION Small general-purpose two-element 90° tee rosette. Exposed solder tab area 0.07 x 0.04 in [1.8 x 1.0 mm]. | | | | | |
| GAGE DIMENSIONS | | | Legend: ES = Each Section S = Section (S1 = Sec 1) | CP = Complete Pattern M = Matrix | <input type="checkbox"/> inch <input type="checkbox"/> millimeter |
| Gage Length | Overall Length | Grid Width | Overall Width | Matrix Length | Matrix Width |
| 0.062 ES | 0.205 CP | 0.080 ES | 0.225 CP | 0.31 | 0.31 |
| 1.57 ES | 5.21 CP | 2.03 ES | 5.72 CP | 7.9 | 7.9 |
| GAGE SERIES DATA | | | | | |
| See Gage Series data sheet for complete specifications. | | | | | |
| Series | Description | Strain Range | Temperature Range | | |
| CEA | Universal general-purpose strain gages. | ±3% | -100° to +350°F [-75° to +175°C] | | |

Note 1: Insert desired S-T-C number in spaces marked XX.

Note 2: Products with designations and options shown in bold are not RoHS compliant.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.