



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Pocket Moisture Meter




Large Dual Graphical LCD

Displays moisture in wood and other building materials

Features:

- 2-in-1 Digital LCD readout and analog bargraph
- Use on wall board, sheet rock, cardboard, plaster, concrete, and mortar
- Self-contained, pocket sized meter with belt clip
- Replaceable threaded measurement electrode pins
- Impact proof housing
- Auto power off conserves battery energy
- Battery operated for on-the-go measurements
- Built-in battery check and measurement verification test
- Complete with protective cap, replacement pins, and three CR-2032 button batteries

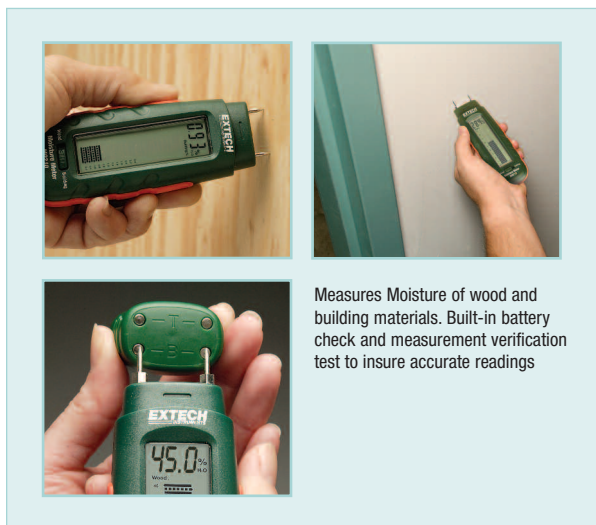

Measures Moisture of wood and building materials. Built-in battery check and measurement verification test to insure accurate readings

Specifications	
Wood Moisture Range	6 to 44%
Basic Accuracy	±1%
Other Building Materials	0.2 to 2.0%
Basic Accuracy	±0.1%
Measurement principle	Electrical resistance
Electrode length	0.3" (8mm)
Electrode pins	Integrated, replaceable
Auto Power Off	After approx. 15 minutes
Operating Temperature	32 to 104°F (0 to 40°C)
Operating Humidity	85% Relative Humidity maximum
Power supply	Three CR-2032 button cells
Dimensions	5.1 x 1.6 x 1.0" (130 x 40 x 25mm)
Weight	3.5 oz (100g)

Ordering Information:

- M0210**.....Pocket Moisture Meter
M0200-PINS..Replacement pins (50 pins)

