



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Magnetic Proximity Sensors (Hall Effect)

MP1013 Sensors

Hall-effect position sensor with convenient snap-fit mounting



Description

The MP1 Series sensors are one-piece non-contact solid-state position sensors. The sensors operate through the use of Hall Effect technology with magnetic fields generated by permanent magnets. They provide a sinking current output.

Features

- Solid state reliability
- Stable output over operating temperature range
- Open collector (NPN) output can be used with bipolar or CMOS logic circuits with suitable pull-up resistor
- South pole sensitive
- Unipolar device (MP101301, MP101302)
- Latching version available (MP101303)
- RoHS compliant
- Fastener-less design
- IP67

Typical Applications

- Door position & interlock
- Limit switch
- Flow/speed
- Home security
- Pedal switch

Environmental Specifications

Operating / Storage Temperature (MP101301, MP101303)	-40 °C to 85 °C (-40 °F to 185 °F)
Operating / Storage Temperature (MP101302)	-40 °C to 125 °C (-40 °F to 257 °F)
Ingress Protection	IP67

Electrical Specifications

Operating Supply Voltage	5 to 24 VDC
Supply Current (MP101301, MP101302)	4.1 mA typ., 7.5 mA max.
Supply Current (MP101303)	2.6 mA typ., 5 mA max.
Output Current (Sink) (MP101301, MP101302)	25 mA max.
Output Current (Sink) (MP101303)	20 mA max.
Maximum Input Voltage (MP101301, MP101302)	30 VDC
Maximum Input Voltage (MP101303)	28 VDC
Maximum Reverse Voltage (MP101301, MP101302)	30 VDC
Maximum Reverse Voltage (MP101303)	None
Recommended Pull-Up Resistor	See chart

Mechanical Specifications

Housing Material	Glass-reinforced nylon plastic
Turn on / off (MP101301, MP101302)	245 Gauss / 60 Gauss
Turn on / off (MP101303)*	60 Gauss / 60 Gauss

*MP101303 is a latching sensor and releases when 60 Gauss is applied to the north pole

Products

Part Number

Leads

MP101301	24 AWG x 150 mm
MP101302*	24 AWG x 150 mm
MP101303*	24 AWG x 150 mm



*Not commonly stocked

Note: An external pull-up resistor is required, the value of which is dependent on the supply voltage. The resistor should be connected between the output and Vcc. Refer to the wiring diagram for lead colors or pin numbering as applicable.

Recommended External Pull-Up Resistor

Volts DC	5	9	12	15	24
Ohms	1k	1.8k	2.4k	3k	3k

Open Collector Sinking Block Diagram

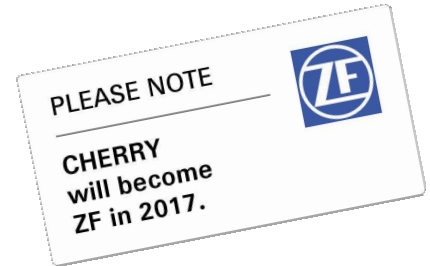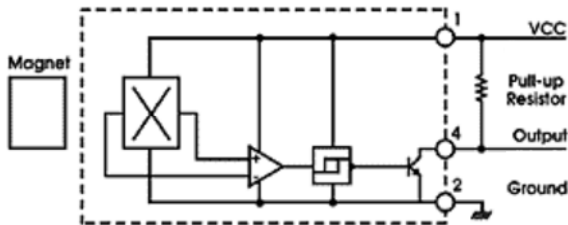

Dimensions mm (inches)

