



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Magnetic Proximity Sensors (Hall Effect)

MP1021 Sensors

Digital Hall-effect position sensor in low-profile flange-mount housing



Description

The MP1 Series sensors are one-piece non-contact solid-state position sensors. The sensors operate through the use of Hall Effect technology with magnetic fields generated by permanent magnets. They provide a sinking current output.

Features

- Solid state reliability
- Flange-mount housing
- Stable output over operating temperature range
- Compatible with unregulated power supply
- Open collector (NPN) output can be used with bipolar or CMOS logic circuits with suitable pull-up resistor
- North pole sensitive
- Unipolar device (MP102101, MP102102, MP102103)
- Latching versions available (MP102104, MP102105, MP102106)
- RoHS compliant
- IP67

Typical Applications

- Door position & interlock
- Limit switch
- Flow/speed
- Home security
- Pedal switch

Environmental Specifications

| | |
|-----------------------|------------------------------------|
| Operating Temperature | -40 °C to 85 °C (-40 °F to 185 °F) |
| Storage Temperature | -40 °C to 85 °C (-40 °F to 185 °F) |
| Ingress Protection | IP67 |

Electrical Specifications

| | |
|------------------------------|------------------------|
| Operating Supply Voltage | 4.5 to 24 VDC |
| Supply Current | 2.5 mA typ., 5 mA max. |
| Output Current (Sink) | 25 mA max. |
| Maximum Reverse Voltage | 30 VDC |
| Recommended Pull-Up Resistor | See chart |

Mechanical Specifications

| | |
|---|--------------------------|
| Housing Material | Glass-reinforced plastic |
| Turn on / off (MP102101, MP102102, MP102103) | 300 Gauss / 95 Gauss |
| Turn on / off (MP102104, MP102105, MP102106)* | 60 Gauss / 60 Gauss |

*MP102104, MP102105, MP102106 are latching sensors and release when 60 Gauss is applied to the south pole

Products

| Part Number | Sensing Location | Termination |
|-------------|------------------|-----------------|
| MP102103 | C | 24 AWG x 314 mm |
| MP102101* | A | 24 AWG x 314 mm |
| MP102102* | B | 24 AWG x 314 mm |
| MP102104* | A | 24 AWG x 314 mm |
| MP102105* | B | 24 AWG x 314 mm |
| MP102106* | C | 24 AWG x 314 mm |


*Not commonly stocked; please contact the factory or your distributor

Note: An external pull-up resistor is required, the value of which is dependent on the supply voltage. The resistor should be connected between the output and Vcc. Refer to the wiring diagram for lead colors or pin numbering as applicable.


Recommended External Pull-Up Resistor

| Volts DC | 5 | 9 | 12 | 15 | 24 |
|----------|----|------|------|----|----|
| Ohms | 1k | 1.8k | 2.4k | 3k | 3k |

Open Collector Sinking Block Diagram

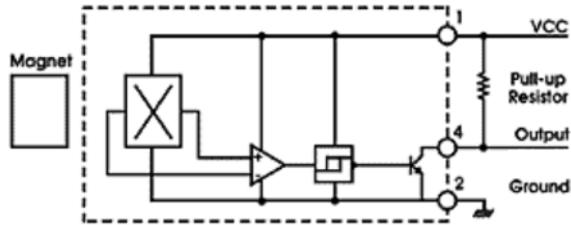

PLEASE NOTE
CHERRY
 will become
ZF in 2017.



Dimensions mm (inches)

