



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# MPL-1036S

January, 2006

## General Description

A surface mount device added to 600V\_L series.  
Realizes better space-saving in mounting on a printed circuit board by using a surface mount package (TO-263).

## Applications

- Continuous-current-mode PFC circuit.
- An output rectifier for SMPS, UPS, or DC-DC converters.
- A Flywheel diode for inverters and choppers.

## Features

- Surface mount package (TO-263)
- Low loss FRD (600 V\_L series)

## Package --- TO-263



Die Structure: Silicon Planer Diode (FRD)

## Key Specifications

Absolute maximum ratings

Parameter	Symbol	Unit	Rating
Transient Peak Reverse Voltage	VRSM	V	600
Peak Reverse Voltage	VRM	V	600
Average Forward Current	IF(AV)	A	3
Peak Surge Forward Current	IFSM	A	50

Electrical characteristics

Parameter	Symbol	Unit	Rating	Conditions
Forward Voltage Drop	VF	V	1.75 max.	IF=3A
Reverse Leakage Current	IR	μA	50 max.	VR=VRM
Reverse Leakage Current Under High Temperature	H•IR	μA	100 max.	VR=VRM, Tj=150°C
Reverse Recovery Time	trr	ns	50 max.	IF=IRP=100mA 90%Recovery point

## §1. Absolute Maximum Ratings and Electrical Characteristics

### •Absolute Maximum Ratings

No.	Parameter	Symbol	Unit	Rating	Conditions
1	Transient Peak Reverse Voltage	VRSM	V	600	
2	Peak Reverse Voltage	VRM	V	600	
3	Average Forward Current	IF(AV)	A	3	
4	Peak Surge Forward Current	IFSM	A	50	10msec. Half sine-wave, one shot
5	I <sup>2</sup> t Limiting Value	I <sup>2</sup> t	A <sup>2</sup> S	12.5	1msec ≤ t ≤ 10msec
6	Junction Temperature	T <sub>j</sub>	°C	-40 to +150	
7	Storage Temperature	T <sub>stg</sub>	°C	-40 to +150	

### •Electrical Characteristics


No.	Parameter	Symbol	Unit	Rating	Conditions
1	Forward Voltage Drop	V <sub>F</sub>	V	1.75 max.	IF=3A
2	Reverse Leakage Current	I <sub>R</sub>	μA	50 max.	VR=VRM
3	Reverse Leakage Current Under High Temperature	H•I <sub>R</sub>	μA	100 max.	VR=VRM, T <sub>j</sub> =150°C
4	Reverse Recovery Time	trr	ns	50 max	IF=IRP=100mA 90% Recovery point
5	Thermal Resistance	R <sub>th(j-c)</sub>	°C/W	2.5 max.	Between Junction and case

# MPL-1036S

January, 2006

## §2. Package information

2-1 Package type, physical dimensions

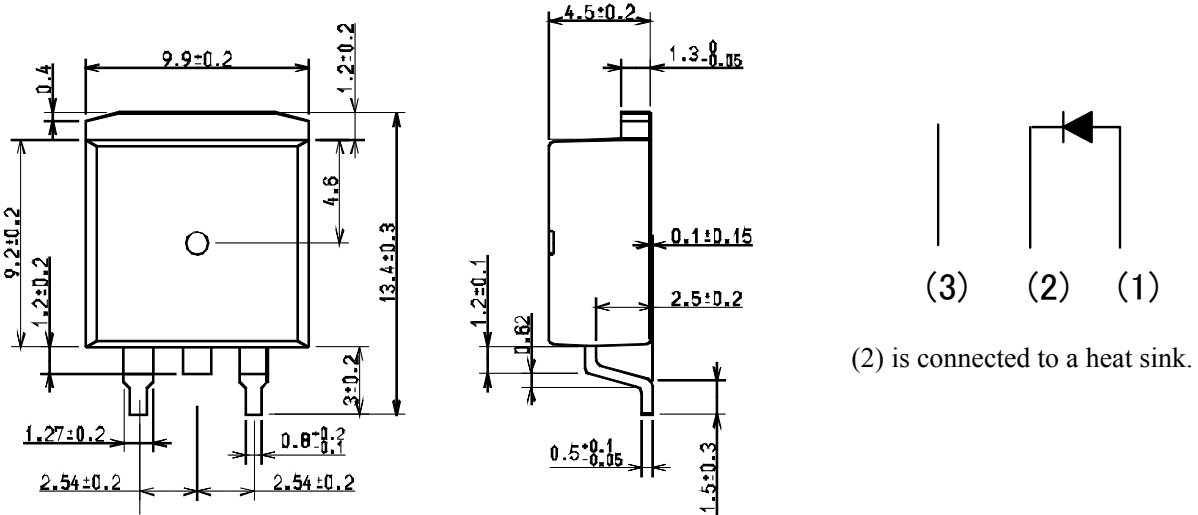

Unit: mm


2-2 Marking

Part Number	Marking		
	Type Name	Polarity	Lot number
MPL-1036S	L1036		1st letter: Last digit of year 2nd letter: Month From 1 to 9 for Jan. to Sep., O for Oct., N for Nov., D for Dec. 3rd letter: Day Week(Every month of 1 <sup>st</sup> to 5 <sup>th</sup> week) 4th to 6th letter: Suffix No.


# MPL-1036S

January, 2006

### §3. Characteristics

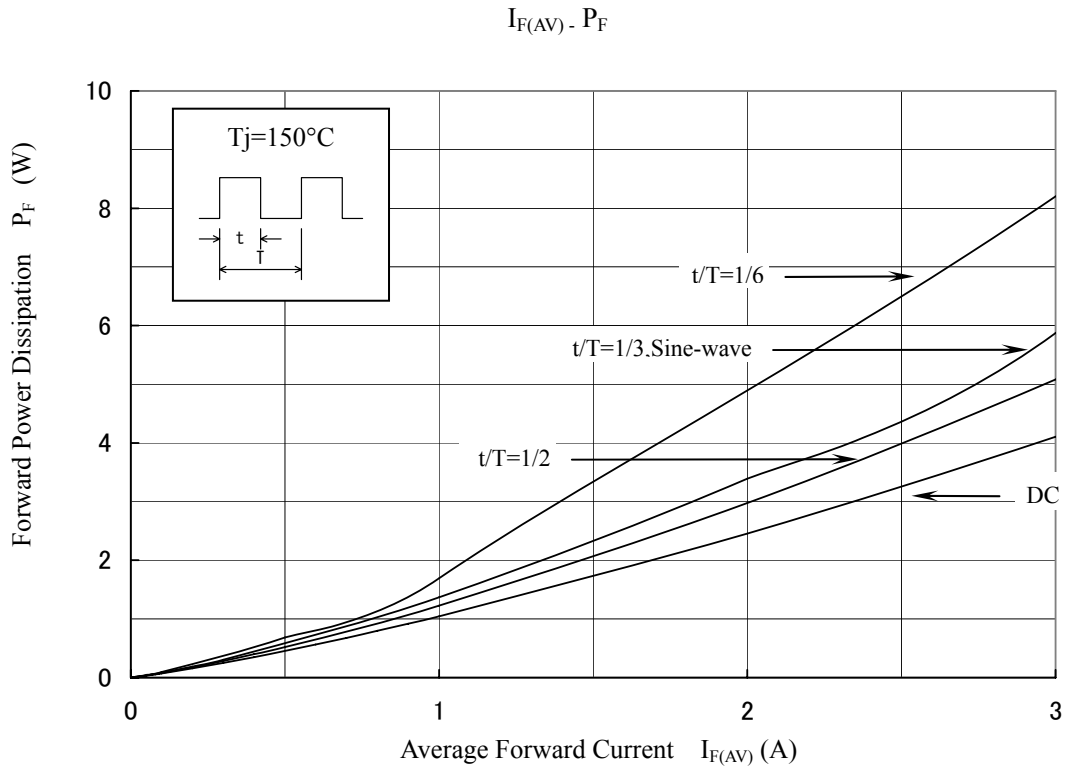

### §4. Derating

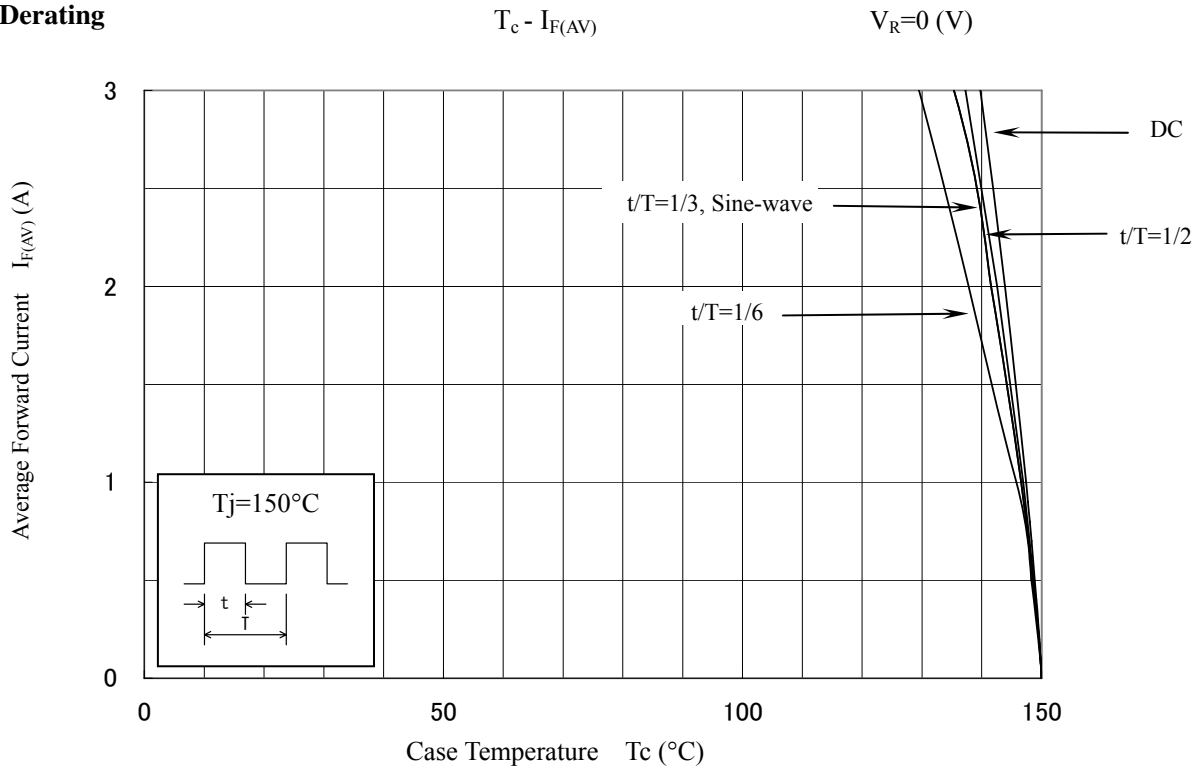

## CAUTION / WARNING

- The information in this publication has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies.
  - Sanken reserves the right to make changes without further notice to any products herein in the interest of improvements in the performance, reliability, or manufacturability of its products.  
Before placing an order, Sanken advises its customers to obtain the latest version of the relevant information to verify that the information being relied upon is current.
  - Application and operation examples described in this catalog are quoted for the sole purpose of reference for the use of the products herein and Sanken can assume no responsibility for any infringement of industrial property rights, intellectual property rights or any other rights of Sanken or any third party which may result from its use.
  - When using the products herein, the applicability and suitability of such products for the intended purpose or object shall be reviewed at the users' responsibility.
  - Although Sanken undertakes to enhance the quality and reliability of its products, the occurrence of failure and defect of semiconductor products at a certain rate is inevitable. Users of Sanken products are requested to take, at their own risk, preventative measures including safety design of the equipment or systems against any possible injury, death, fires or damages to the society due to device failure or malfunction.
  - Sanken products listed in this catalog are designed and intended for the use as components in general purpose electronic equipment or apparatus (home appliances, office equipment, telecommunication equipment, measuring equipment, etc.). Before placing an order, the user's written consent to the specifications is requested.  
When considering the use of Sanken products in the applications where higher reliability is required (transportation equipment and its control systems, traffic signal control systems or equipment, fire/crime alarm systems, various safety devices, etc.), please contact your nearest Sanken sales representative to discuss and obtain written confirmation of your specifications. The use of Sanken products without the written consent of Sanken in the applications where extremely high reliability is required (aerospace equipment, nuclear power control systems, life support systems, etc.) is strictly prohibited.
  - Anti radioactive ray design is not considered for the products listed herein.
  - This publication shall not be reproduced in whole or in part without prior written approval from Sanken.
- 
- This is notification that you, as purchaser of the products/technology, are not allowed to perform any of the following:
    1. Resell or retransfer these products/technology to any party intending to disturb international peace and security.
    2. Use these products/technology yourself for activities disturbing international peace and security.
    3. Allow any other party to use these products/technology for activities disturbing international peace and security.Also, as purchaser of these products/technology, you agree to follow the procedures for the export or transfer of these products/technology, under the Foreign Exchange and Foreign Trade Law, when you export or transfer the products/technology abroad.