

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


**Sales Outline Drawing**

**Specifications:**

|                       |   |
|-----------------------|---|
| Sound Level Category  | Loud  |
| Mode of Operation     | Siren Sweep 2.1 - 5.9 kHz @ 3.5 Sweeps per Sec. |
| Voltage Rating        | 20 to 28 VDC                                    |
| Frequency             | 2100-5900 Hz Typical                            |
| Loudness @ 1 FT       | 85 to 95 dB(A) Typ.                             |
| Current Draw          | 50mA MAX  |
| Housing Material      | Valox (UL94V-0), Color: Black                   |
| Storage Temperature   | -40° to +80° C                                  |
| Operating Temperature | -40° to +65° C                                  |
| Weight (Typical)      | 4.0g  |
| Options               | Please contact factory.                         |

**Dimensions:** Inches (mm)

**ROHS Compliant**

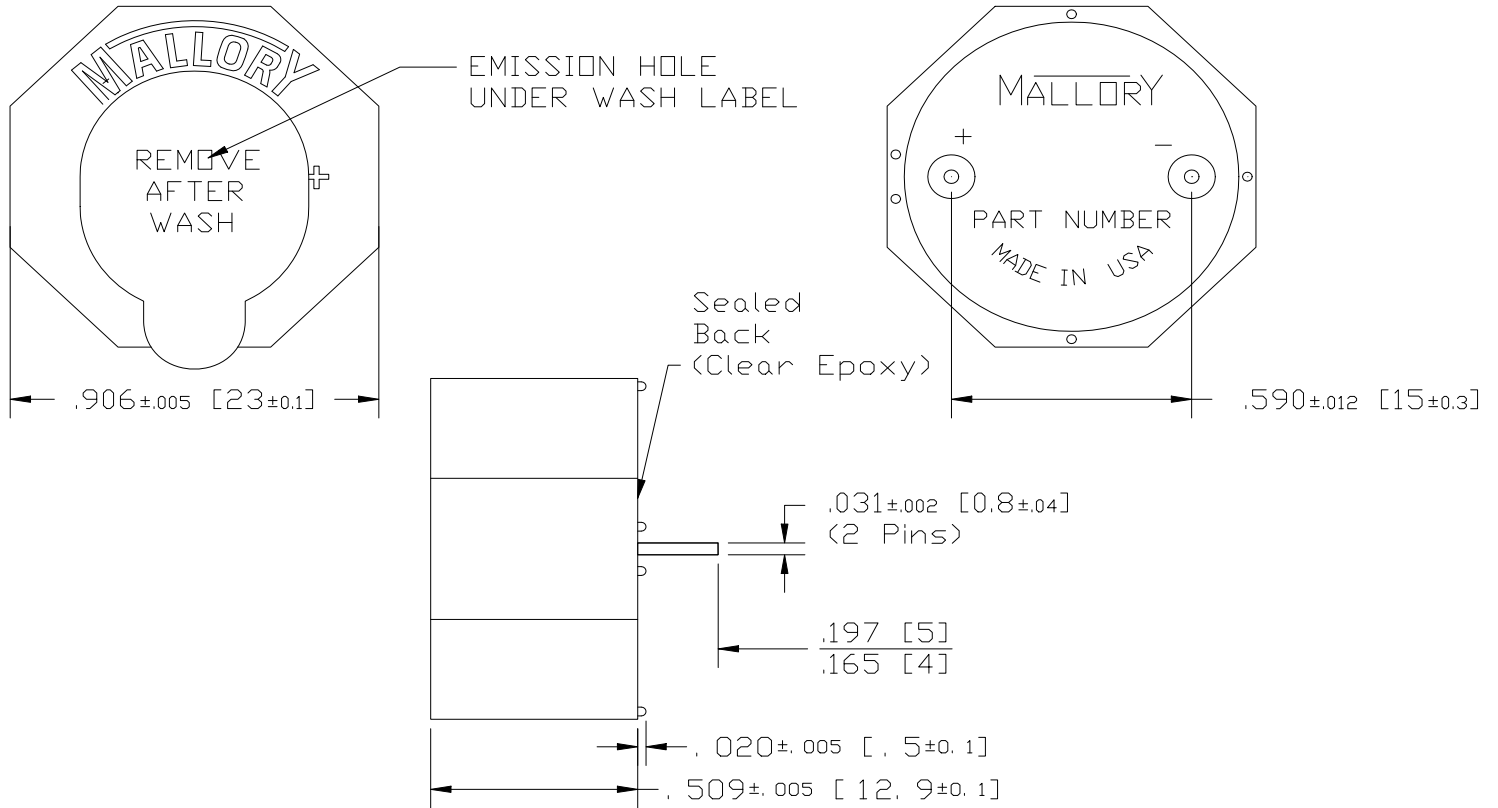

NOTE A:  
TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:  
MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER. UNITS ARE SUITABLE FOR WAVE SOLDERING AND AQUEOUS WASH WHEN THE EMISSION HOLE IS COVERED WITH A WASH LABEL. RECOMMENDED MAXIMUM TEMPERATURE AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.