



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Micro Tracker

maestro



empowering wireless

Maestro GPRS/GPS MicroTracker

Maestro MicroTracker combines GSM/GPRS and GPS technologies in an industrial, compact grade design. Its exceptionally small footprint featuring embedded antennas, a single port connector make it easy to fit into most vehicles. Maestro MicroTracker provides key features for fleet management applications including reporting of position, speed mileage and ignition of the vehicle. Empowered by the latest Maestro GPS SiRF StarIV A2100-A modules, Maestro MicroTracker also provides intelligent device management functionality like remote firmware and software upgrade and diagnostics. It's well define parser make it easy to integrate into your back-end application server.


Key Features :

- Light, compact, industrial grade design
- Easy to conceal
- Embedded GSM and GPS antenna
- Single 10 pins connector
- Cutting edge Maestro GPS SiRF Star IV
- GPRS & GPS LED status indicator
- Optional battery back-up
- Optional accelerometer and magnetometer
- Intelligent device management over the air



Faster Time to Market

To help its customers to quickly build the link from the tracking unit to their application server, Maestro provides an embedded application featuring tracking, monitoring and geofencing capabilities. Accelerating testing phase and time to market Maestro embedding application will let you get revenues faster than ever.

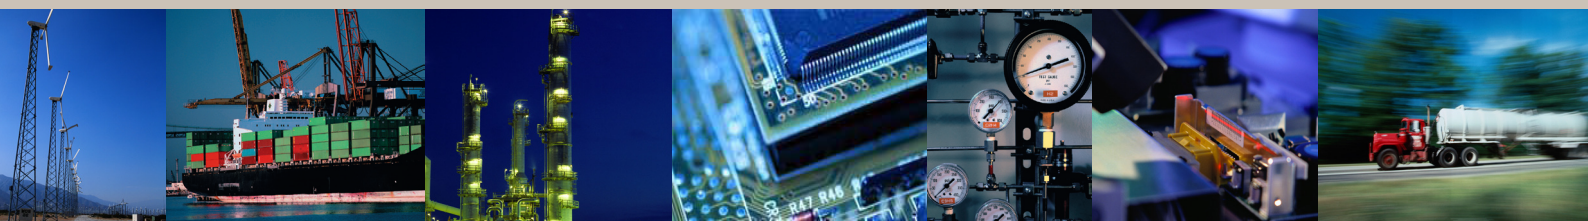

Micro Tracker

Technical information



GENERAL FEATURES
- Temperature range:
- Functional: -30°C to +80°C
- Storage: -40°C to +85°C
- Casing: PC/ABS material UL94V-0 flammability
- Shock and Vibration : SAE J1211
- Dimensions: 58.6 x 60 x 13mm
- Weight: 45g

ELECTRICAL CHARACTERISTICS
- Supply voltage range: 6-32V DC
- Current consumption during idle: 58mA Typical at 12V DC
- Current consumption during transmission: 104mA Typical at 12V DC
- Current consumption during power saving: 8mA Typical at 12V DC

GSM / GPRS
- Wireless Microprocessor - WMP100 - approved module by AT&T; PTCRB Certified & FCC Certified - Sierra Wireless
- Frequency band: 850 / 900 / 1800 / 1900 MHz
- Built-in antenna
- SIM card interface 1.8/3.0V
- SIM card holder: Flip type; SIM card is accessible under the lid

GPS
- GPS engine : SiRFstar IV - Maestro A-2100-A
- Positioning Accuracy : 2.5 m CEP - 2.0 m CEP SBAS
- A-GPS: Embedded Extended Ephemeris and Ephemeris Push support
- High sensitivity: -163dBm Tracking and -160dBm Navigation
- TTFF typically <1s when hot and <35s from cold (outdoors)
- Optional MEMS support

COMMUNICATION WITH BACK-END
- Embedded software for faster time to market
Or Customizable OpenAT application
- GSM / GPRS (TCP or UDP) or SMS communication channels

STATUS INDICATORS
- One red color LED indicating GPS position fix
- One green color LED indicating GSM registration

ELECTRICAL INTERFACE
- 10-pin connector
Connection for :
- Power supply
- Open collector output (able to drive external LED/relay 250mA) x2
- Digital input x2 : active between 6v to 32V DC
- Analog input x1
Connecting cable :
- 10 pin plug
- Wire harness
- 2A fuse on power
- Relay socket (for starter connection)


FUNCTION AND FEATURE
- Immediate reporting of vehicle status (position, speed, mileage, ignition)
- Disable/Enable ignition - engine
- Configurable alert messages for overspeed, geofence, ignition, etc.
- Software/Firmware upgrade over the air
- Optional 540 mAh battery back-up
- Optional MEMS: accelerometer, magnetometer
- m2mgateway.net compatible for demo and quick implementation

SERVICE PORT
- Accessible from outside after removing a plastic lid
- Serial port at logic 2.8V TTL level + other electrical test point
- Using external RS232 transceiver for connection to a PC, for diagnostic & software upgrade

COMPLIANCE
- FCC Part 15B, 22H & 24E
- PTCRB
- CE
- A-tick
- RoHS

ACCESSORIES
- OBD2 wire harness
- Plastic blister for protection and mounting

Ordering Information

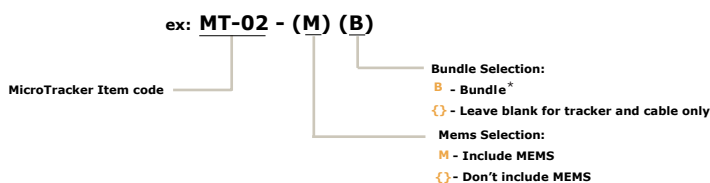

* Bundle include: MT-02, battery back-up and complete cabling with relay

Maestro Wireless Solutions Ltd
 3603-9, 36/F
 118 Connaught Road West
 Hong Kong
 Tel: (852) 2869 0688
 Fax: (852) 2525 4701
 contact@maestro-wireless.com
 www.maestro-wireless.com

