



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## FEATURES

- 12 WATTS OUTPUT POWER
- OUTPUT CURRENT UP TO 3.5A
- STANDARD 1.25 X 0.80 X 0.40 INCH
- HIGH EFFICIENCY UP TO 88%
- 2:1 WIDE INPUT VOLTAGE RANGE
- FIVE-SIDED CONTINUOUS SHIELD
- FIXED SWITCHING FREQUENCY (400KHz)
- STANDARD 24 PIN DIP PACKAGE
- I/O ISOLATION 1600 VDC
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

## DESCRIPTION

The MT12A series offer 12 watts of output power from a package in an IC compatible 24pin DIP configuration. MT12A series have 2:1 wide input voltage of 9-18, 18-36 and 36-75VDC. The MT12A have features 1600VDC of isolation, short circuit protection and as well as five sided shielding.

## TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Output power			12 Watts, max.
Voltage accuracy	Full load and nominal Vin		±1.2%
Minimum load			0%
Line regulation	LL to HL at Full Load	Single	± 0.2%
		Dual	± 0.5%
Load regulation	No Load to Full Load	Single (DIP)	± 0.5%
		Dual (DIP)	± 1%
		(2.5Vo only)	± 1%
Cross regulation (Dual)	Asymmetrical load 25% / 100% FL		± 5%
Ripple and noise	20MHz bandwidth		See table
Temperature coefficient			±0.02% / °C, max.
Transient response recovery time	25% load step change		250µS
Over voltage protection	2.5V output		3.9VDC
	3.3V output		3.9VDC
	Zener diode clamp		6.2VDC
	(only single)	12V output	15VDC
	15V output		18VDC
Over load protection	% of FL at nominal input		150%, typ.
Short circuit protection		Continuous, automatics recovery	
GENERAL SPECIFICATIONS			
Efficiency			See table
Isolation voltage	Input to Output		1600VDC, min.
	Input(Output) to Case	DIP	1600VDC, min.
Isolation resistance			10 <sup>9</sup> ohms, min.
Isolation capacitance			1200pF, max.
Switching frequency			400KHz, typ.
Case material			Nickel-coated copper
Base material			Non-conductive black plastic
Potting material			Epoxy (UL94-V0)
Dimensions			1.25 X 0.80 X 0.40 Inch (31.8 X 20.3 X 10.2 mm)
Weight			18g (0.62oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332		2.750 x 10 <sup>6</sup> hrs
	MIL-HDBK-217F		7.575 x 10 <sup>5</sup> hrs

INPUT SPECIFICATIONS			
Input voltage range	12V nominal input		9 – 18VDC
	24V nominal input		18 – 36VDC
	48V nominal input		36 – 75VDC
Input surge voltage	12V input		36VDC
	24V input		50VDC
	48V input		100VDC
100mS max			
Input reflected ripple current	Nominal Vin and full load		20mA <sub>p-p</sub>
Start up time	Nominal Vin and constant resistive load	Power up	450mS, max.
Start-up voltage	12V input		9VDC
	24V input		18VDC
	48V input		36VDC
Shutdown voltage	12V input		8VDC
	24V input		16VDC
	48V input		33VDC
Remote ON/OFF (Note 6) (Positive logic)	DC-DC ON	Open or 3.0V < Vr < 12V	
	DC-DC OFF	Short or 0V < Vr < 1.2V	
Input current of remote control pin	Nominal Vin		-0.5mA ~ 0.5mA
Remote off state input current	Nominal Vin		2.5mA
ENVIRONMENTAL SPECIFICATIONS			
Operating ambient temperature			-40°C to +85°C (with derating)
Maximum case temperature			100°C
Storage temperature range			-55°C to +105°C
Thermal impedance	Nature convection		20°C/Watt
Thermal shock			MIL-STD-810F
Vibration			MIL-STD-810F
Relative humidity			5% to 95% RH
EMC CHARACTERISTICS			
EMI (Note 7)	EN55022		Class A
ESD	EN61000-4-2	Air ± 8KV	Perf. Criteria A
		Contact ± 6KV	
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient (Note 8)	EN61000-4-4	± 2KV	Perf. Criteria A
Surge (Note 8)	EN61000-4-5	± 1KV	Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A




Model Number	Input Range	Output Voltage	Output Current		Output (4) Ripple & Noise	Input Current		Eff (4) (%)	Capacitor(5) Load max
			Min. load	Full load		No load (3)	Full load (2)		
MT12A-1225SI	9 – 18 VDC	2.5 VDC	0mA	3500mA	85mVp-p	50mA	935mA	82	2000µF
MT12A-1233SI	9 – 18 VDC	3.3 VDC	0mA	3500mA	85mVp-p	60mA	1203mA	84	2000µF
MT12A-1205SI	9 – 18 VDC	5.1 VDC	0mA	2400mA	85mVp-p	53mA	1244mA	86	2000µF
MT12A-1212SI	9 – 18 VDC	12 VDC	0mA	1000mA	85mVp-p	15mA	1219mA	86	430µF
MT12A-1215SI	9 – 18 VDC	15 VDC	0mA	800mA	85mVp-p	17mA	1219mA	86	300µF
MT12A-1205WI	9 – 18 VDC	± 5 VDC	0mA	± 1200mA	85mVp-p	24mA	1282mA	82	± 1250µF
MT12A-1212WI	9 – 18 VDC	± 12 VDC	0mA	± 500mA	85mVp-p	19mA	1205mA	87	± 200µF
MT12A-1215WI	9 – 18 VDC	± 15 VDC	0mA	± 400mA	85mVp-p	24mA	1205mA	87	± 120µF
MT12A-2425SI	18 – 36 VDC	2.5 VDC	0mA	3500mA	85mVp-p	36mA	461mA	83	2000µF
MT12A-2433SI	18 – 36 VDC	3.3 VDC	0mA	3500mA	85mVp-p	36mA	594mA	85	2000µF
MT12A-2405SI	18 – 36 VDC	5.1 VDC	0mA	2400mA	85mVp-p	35mA	614mA	87	2000µF
MT12A-2412SI	18 – 36 VDC	12 VDC	0mA	1000mA	85mVp-p	16mA	602mA	87	430µF
MT12A-2415SI	18 – 36 VDC	15 VDC	0mA	800mA	85mVp-p	17mA	602mA	87	300µF
MT12A-2405WI	18 – 36 VDC	± 5 VDC	0mA	± 1200mA	85mVp-p	15mA	633mA	83	± 1250µF
MT12A-2412WI	18 – 36 VDC	± 12 VDC	0mA	± 500mA	85mVp-p	15mA	595mA	88	± 200µF
MT12A-2415WI	18 – 36 VDC	± 15 VDC	0mA	± 400mA	85mVp-p	18mA	595mA	88	± 120µF
MT12A-4825SI	36 – 75 VDC	2.5 VDC	0mA	3500mA	85mVp-p	10mA	231mA	83	2000µF
MT12A-4833SI	36 – 75 VDC	3.3 VDC	0mA	3500mA	85mVp-p	14mA	297mA	85	2000µF
MT12A-4805SI	36 – 75 VDC	5.1 VDC	0mA	2400mA	85mVp-p	23mA	307mA	87	2000µF
MT12A-4812SI	36 – 75 VDC	12 VDC	0mA	1000mA	85mVp-p	11mA	301mA	87	430µF
MT12A-4815SI	36 – 75 VDC	15 VDC	0mA	800mA	85mVp-p	5mA	301mA	87	300µF
MT12A-4805WI	36 – 75 VDC	± 5 VDC	0mA	± 1200mA	85mVp-p	6mA	316mA	83	± 1250µF
MT12A-4812WI	36 – 75 VDC	± 12 VDC	0mA	± 500mA	85mVp-p	6mA	297mA	88	± 200µF
MT12A-4815WI	36 – 75 VDC	± 15 VDC	0mA	± 400mA	85mVp-p	6mA	297mA	88	± 120µF

NOTE:

- BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.  
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
- Maximum value at nominal input voltage and full load of standard type.
- Typical value at nominal input voltage and no load.
- Typical value at nominal input voltage and full load.
- Test by minimum Vin and constant resistive load.
- The ON/OFF control pin voltage is referenced to -Vin.
- The MT12A series can meet EN55022 Class A with parallel an external capacitor to the input pins.  
Recommend: 12Vin : 6.8µF/50V 1812 MLCC .  
24Vin : 4.7µF/50V 1812 MLCC .  
48Vin : 2.2µF/100V 1812 MLCC.
- An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.  
The filter capacitor Kaga USA suggest: Nippon chemi-con KY series, 220µF /100V, ESR 48mΩ.

DIP PIN CONNECTION					
PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	CTRL	CTRL			
2	- INPUT	- INPUT	23	+ INPUT	+ INPUT
3	- INPUT	- INPUT	22	+ INPUT	+ INPUT
9	NC	COMMON	16	- OUTPUT	COMMON
11	NC	- OUTPUT	14	+ OUTPUT	+ OUTPUT

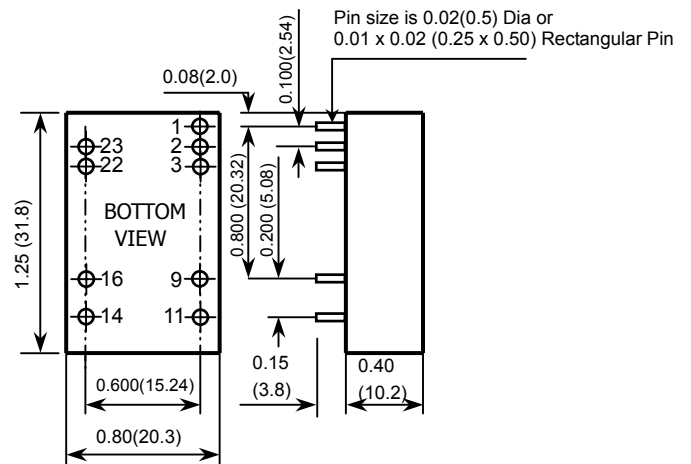

- All dimensions in Inches (mm)  
Tolerance: X.XX±0.02 (X.X±0.5)  
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01(0.25)
- Pin dimension tolerance ±0.004 (0.1)