

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







## Altera<sup>™</sup> MT2000 Modified, Medical Grade, Polyolefin, Heat - Shrinkable Tubing

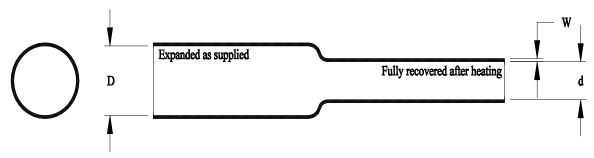

This specification covers the requirements for one type of single wall, electrical insulating, extruded tubing whose diameter will reduce to a predetermined size upon application of heat in excess of 140°C (284°F).

The tubing is fabricated from modified polyolefin crosslinked by irradiation. It shall be homogenous and essentially free from flaws, defects, pinholes, seams, cracks or inclusions.

The tubing is fabricated from materials which meet the requirements of U.S. Pharmacopeia Class VI Plastics. Color shall be black or clear unless otherwise specified.

Table 1: <u>Dimensions</u>

	As Supplied		Recovered							
Size	Inside D Minim		Inside Diameter Maximum (d)		Wall Thickness(Inches, Millimeters) (W)					
	mm.	in.	mm.	in.	Minimum		Maximum		Nominal	
1mm	1.0	.040	0.45	.018	.008	0.20	.012	0.30	.010	.25
2mm	2.0	.080	0.80	.032	.008	0.20	.012	0.30	.010	.25
3mm	3.0	.120	1.20	.048	.008	0.20	.012	0.30	.010	.25
6mm	6.0	.240	2.4	.096	.008	0.20	.012	0.30	.010	.25
10mm	10.0	.400	4.0	.160	.012	0.30	.016	0.41	.014	.36

**Specification Control Drawing** TE Connectivity Altera<sup>™</sup>MT2000 Raychem 300 Constitutional Drive Modified, Medical Grade, Polyolefin, Menlo Park, CA 94025 USA **Heat - Shrinkable Tubing** TE Connectivity reserves the right to amend this drawing at any Document No: time. Users should evaluate the suitability of the product for their MT2000 application Cage Code: Scale: Size: Rev. Date: Rev.: Sheet: 06090 11MAY11 1 of 2 None Α B1

Print Date: 11-May-11 If this document is printed it becomes uncontrolled. Check for the latest revision.

**Table 2: Properties** 

Property	Unit	Requirement	Test Method
PHYSICAL			
* Dimensions	Inches (mm)	In accordance with Table 1	
* Longitudinal Change	Percent	0, -10	ASTM D 2671
* Concentricity as supplied	Percent	60 minimum	ASTM D 2671
Tensile Strength	PSI (MPa)	3000 minimum (20.7)	ASTM D 2671,
Ultimate Elongation	Percent	200 minimum	2"/minute
Secant Modulus	PSI (MPa)	5.0 x 10 <sup>4</sup> minimum <i>(344)</i>	ASTM D 2671
Heat Resistance			
168 hours at 125℃ (257 ℉)			
Followed by test for:			ASTM D 2671,
Ultimate Elongation	Percent	200 minimum	2"/minute
ELECTRICAL			
Dielectric Strength	Volts/mil	1000 minimum <i>(39.36)</i>	ASTM D 2671
	(volts/mm)		
Dielectric Withstand			
3000V, 60 Hz	sec	60 minimum	ASTM D 2671
CHEMICAL			
Fluid Resistance			ASTM D 2671
24 hours at 23 ± 3℃ (77 ± 5年)			
Isopropyl Alcohol			
5% Saline Solution			
Cidex**			
Followed by tests for:			
Dielectric Strength	Volts/mil	1000 minimum (39.36)	ASTM D 2671
	(volts/mm)		
Tensile Strength	PSI (MPa)	3000 minimum (20.7)	ASTM D 2671
Heavy Metals Analysis	ppm	1 maximum	USP XXII
Cadmium		(total of all metals)	Physicochemical
Mercury			Tests-Plastics
Lead			(Note 1)
Bismuth			
Antimony			

<sup>\*</sup> Denotes lot acceptance test

Note 1: Sample preparation and extraction is per USP XXII. Metals analysis may be colorimetric as described in USP XXII or by equivalent quantitative analytical method.

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. Company. All Rights Reserved.

Rev. Date:	Rev.:	Document No.	Sheet:
11MAY11	B1	MT2000	2 of 2

<sup>\*\*</sup>Trademark of Johnson & Johnson Company