



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# MultiModem® iCell

## Intelligent GPRS Cellular Modem




The MultiModem® iCell intelligent GPRS cellular modem offers standards-based quad-band GPRS performance. This ready-to-deploy, standalone modem provides wireless data communication and integrates seamlessly with virtually any application. The intelligence of the embedded Universal IP™ stack allows for automatic/persistent connectivity for mission critical applications and enhanced M2M functionality. The MultiModem iCell intelligent cellular modem is based on industry-standard open interfaces and can be desktop or panel mounted.

### Features

- GPRS Class 10
- Quad-band 850/900/1800/1900 MHz
- Intelligent Universal IP stack for enhanced machine-to-machine functionality
- Event monitoring and reporting via integrated GPIO ports
- Supports Short Message Service such as text and PDU mode, point-to-point (MT/MO) and cell broadcast
- Circuit-switched data up to 14.4K bps
- RS-232 interface supports DTE speeds to 115.2K bps
- USB 2.0 full speed interface (supported in a future firmware release, currently RS-232 only)
- SMA antenna connector and SIM socket
- Desktop or panel mounting
- FCC, PTCRB and R&TTE certified
- AT command compatible
- Two-year warranty

### Benefits

- Intelligent Universal IP stack
- Enhanced M2M functionality
- Programmable GPIO ports
- Carrier approved

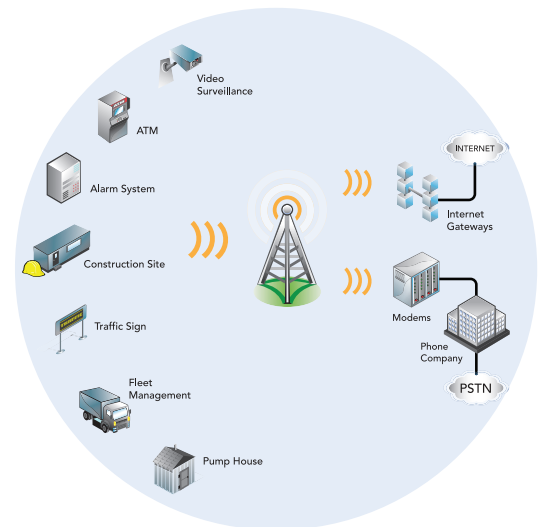



## Highlights

**Applications.** The MultiModem iCell intelligent cellular modem with GPRS support is ideal for applications which periodically need to send or receive data over a wireless network.

**Universal IP for Enhanced M2M Connectivity.** Multi-Tech's Universal IP stack consists of a common set of TCP/IP networking protocols and M2M applications implemented using a standard AT command interface. Universal IP provides developers a common programming interface effectively future proofing their application as new cellular technologies are introduced. Some of the benefits of Universal IP are Automatic/Persistent Connectivity, Device Monitor, Event Monitoring/Reporting, Ping & TCP Keep Alive and Wake-up on Caller ID/Wake-up on Ring.

**Reduces Development Time.** The MultiModem iCell intelligent cellular modem can make your existing and next generation device communication-ready without requiring any hardware changes to its design. It actually provides faster time-to-market because it relieves the burden and expense of obtaining PTCRB and RF approvals.

**Multiple Interface Options.** The MultiModem iCell intelligent cellular modem is designed around a broad range of interface options including RS-232; USB (supported in a future firmware release) and GPIO to provide you with seamless connectivity for your application. Each interface option offers unique features and benefits related to the technology it supports.

**Comprehensive Service and Support.** The Multi-Tech commitment to service means we provide a two-year product warranty and service that includes technical support, 24-hour web site and ftp support.

## Ordering Information

Product	Description	Region
MTCMR-G*†	Intelligent GPRS Modem	Global
<b>Ordering Codes</b>		
-F4	850/900/1800/1900 MHz GPRS Modem	
-ED	900/1800 MHz Default	
-NAM	Includes US Style Power Plug	
-EU	Includes Euro Style Power Plug	
-GB/IE	Includes UK Style Power Plug	

\* Use ordering codes for specific build options. Go to [www.multitech.com](http://www.multitech.com) for detailed product model numbers.

† All build options support 850/900/1800/1900 MHz cellular connectivity. Standard builds default to 850/1900 MHz while the builds that include a -ED in the ordering code default for 900/1800 MHz.

Made in Mounds View, MN, U.S.A.

Features and specifications are subject to change without notice.

**Trademarks / Registered Trademarks:** MultiModem, Universal IP, Multi-Tech, and the Multi-Tech logo: Multi-Tech Systems, Inc. / All other products and technologies are the trademarks or registered trademarks of their respective holders.

## Specifications

### Packet Data Features

GPRS Class 10, PBCCH support  
Coding Schemes: CS1 to CS4  
Embedded TCP/IP stack

### Circuit Switched Data/Fax Features

Asynchronous, transparent & non-transparent up to 14.4K bps, MNP2 & V.42bis

### SMS Features

Text & PDU, Point-to-Point, cell broadcast

### Universal IP Features

TCP/IP features: DNS resolve, FTP client, Ping, POP3 client, PPP (dial-out), SMTP client, TCP RAW client & server, UDP RAW client & server, PAP, CHAP

### Connectors

RF Antenna: 50 ohm SMA female  
RS-232: DB-9 female  
USB: USB Type B (future firmware release)  
Power: 2.5mm miniature screw  
GPIO: 6-pin Molex female with ESD protection  
SIM: Standard 3V SIM receptacle

### Power Requirements

9V to 32VDC

### GPIO Functions

Pin 1-2: Programmable digital input/output  
Pin 3-4: Programmable digital input/output or ADC  
Pin 5: ADC  
Digital inputs: 5V tolerant TTL/CMOS levels; digital outputs: 3.3V high; ADC inputs: 0 to 3.3V rail; Output current: 2mA max

### Physical Description

4.9" w x 1.1" h x 3.5" d; 8 oz  
(12.4 cm x 2.8 cm x 8.9 cm; 227 g)

### Environment

Operating: -30° to +70° C  
Storage: -40° to +85° C  
Humidity: 20% to 90% non-condensing

### Certifications

CE Mark, R&TTE  
EMC: FCC Part 15, 22, 24; EN 55022, EN 55024, EN 301 489-1, EN 301 489-7, EN 301 511; RSS 132, 133,102  
Safety: cUL 60950-1, UL 60950-1; EN 60950-1, AS/NRZ60950-1  
Network: PTCRB

**World Headquarters**  
Tel: (763) 785-3500  
(800) 328-9717  
[www.multitech.com](http://www.multitech.com)

**EMEA Headquarters**  
Multi-Tech Systems (EMEA)  
United Kingdom  
Tel: +(44) 118-959 7774

Multi-Tech Systems (EMEA)  
France  
Tel: +(33) 1 49 19 22 06