



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

TOOL	ANVIL SLOT WIDTH (STRAP SIZE)	ANVIL MARKS	SETSHEAR FINGER MARKS	CHANGEOVER KIT	TOOL TENSION SETTING
MTRTLS	3/16" (4.6mm) – S	1 MARK	2 MARKS	KMTRTLS	S
	1/4" (6.4mm) – LH	2 MARKS	2 MARKS		LH
MTRTH	5/16" (7.9mm) – H	NO MARK	1 MARK	KMTRTH	H

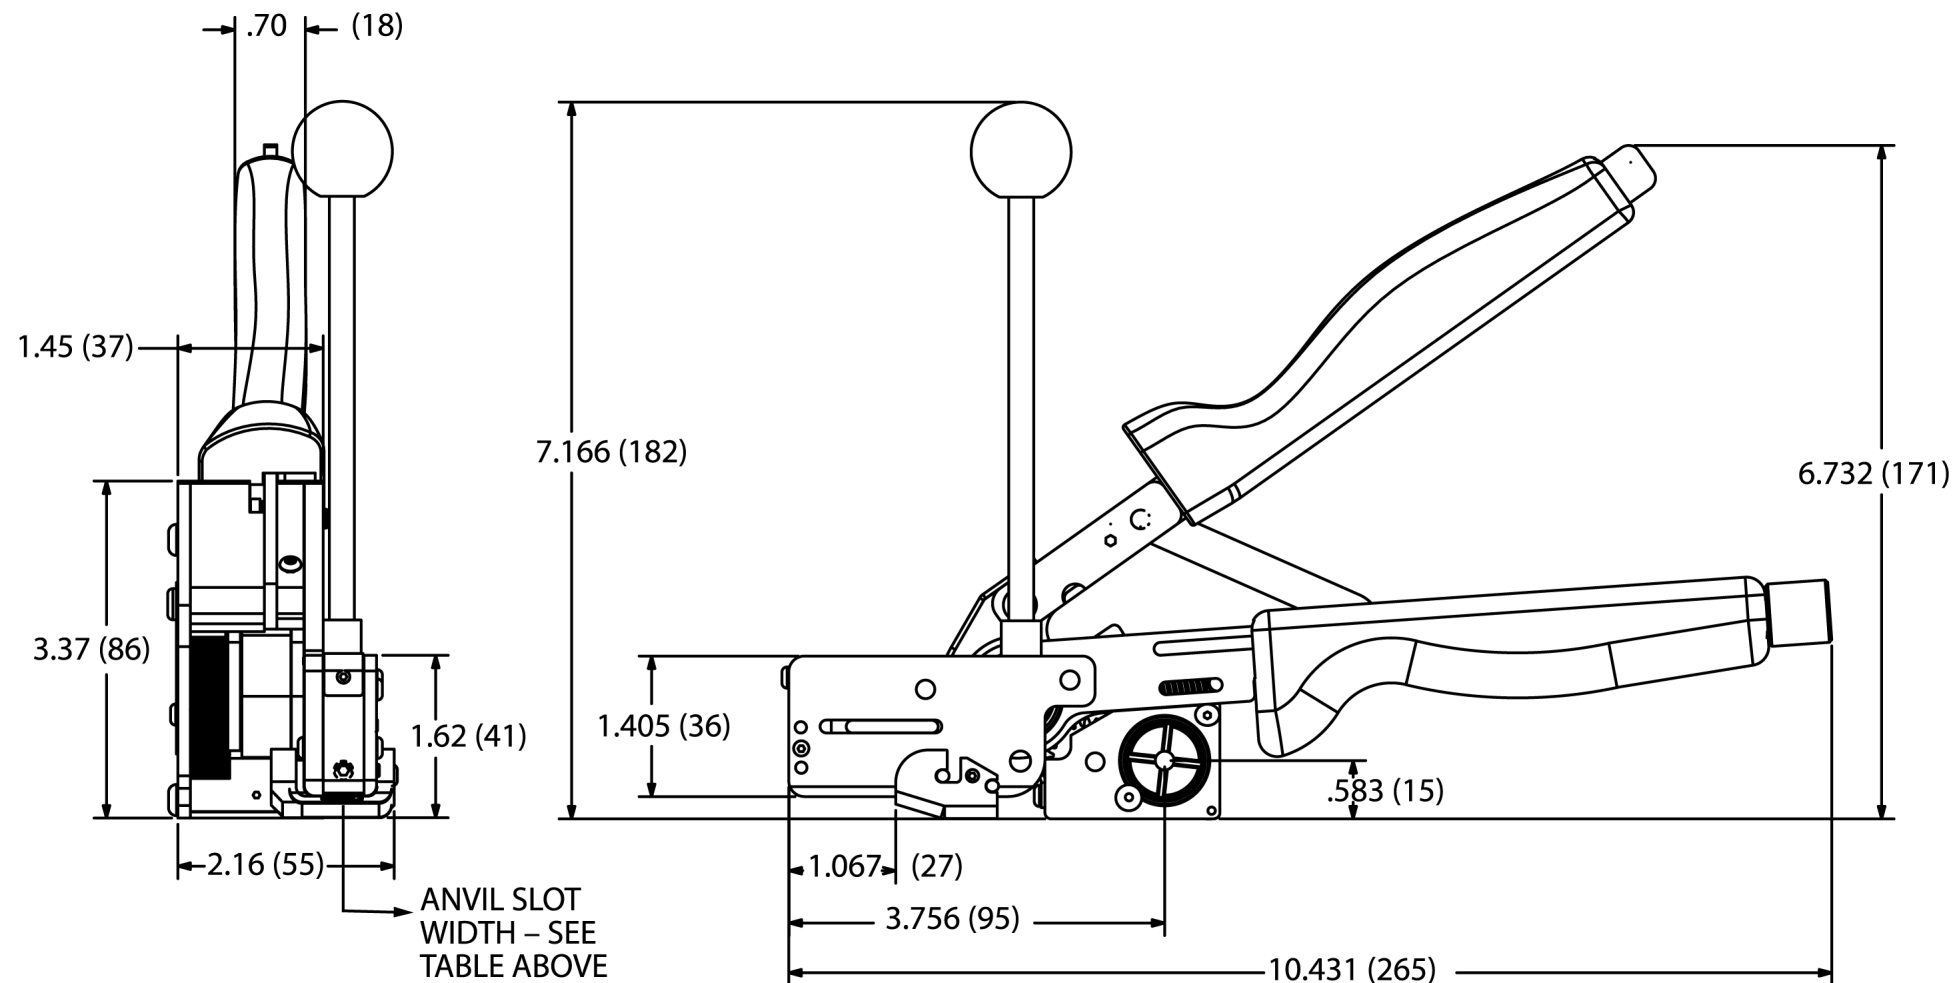

NOTES, UNLESS OTHERWISE SPECIFIED:

PANDUIT MTRTH tool installs MRT and MRS Ball Lock ties in widths of 5/16" (7.9mm) Heavy (H) cross sections.

PANDUIT MTRTLS tool installs MRT and MRS Ball Lock ties in widths of 3/16" (4.6mm) Standard (S) cross sections. An Anvil is included, which can be changed for installing MRT and MRS ties in widths of 1/4" (6.4mm) Light-Heavy (LH) cross-sections.

TOOL FEATURES INCLUDE:

- Adjustable detent mechanism
- Smooth cable tie cut-off
- Tie tensioning mechanism

KMTRTH and KMTRTLS Changeover Kits are available which allow installation of all three cross-sections of MRT and MRS ties with either tool.

CABLE TIE CODE:


MRT = Metal Retained Tension Tie

MRS = Metal Radial Seal Retained Tension Tie

TOOL WEIGHT = 47 OZ. (1329 GRAMS)

DIMENSIONS IN PARENTHESES ARE METRIC.

F:/RVUSERS/ENGDOCS/CUSTDWGS/TM25278B01_00 MTRTH-LS CD.doc

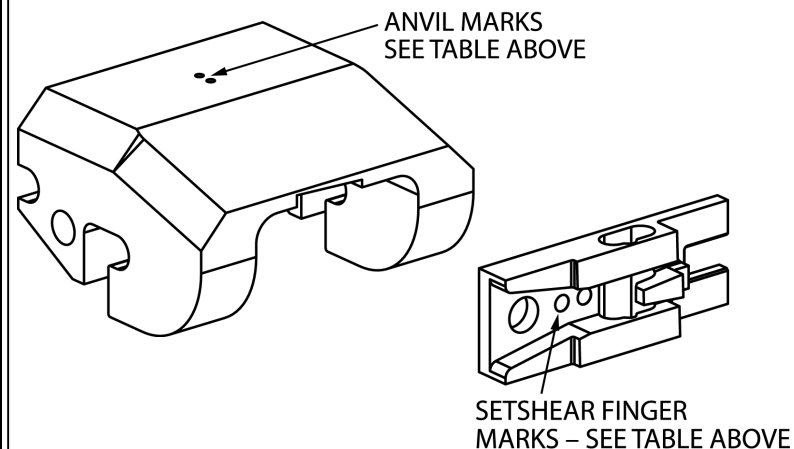

									<div><div>PANDUIT</div><div>CORP. TINLEY PARK, ILLINOIS</div></div>				
									<div>MTRTH and MTRTLS</div> <div>CUSTOMER DRAWING</div>				
									UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
									(.x) ± ---- (.xxx) ± ---- (.xx) ± ---- ANGLES ± ----				
									DRAWN BY: BLR	MATL: —————			
00	6-13-07	BLR	BJPU	RELEASED	4232	--	JRWA		DATE: 6-13-07		SCALE NONE	DRAWING NO. TM25278B01	DWG B SIZE
REV	DATE	BY	CHK'D	DESCRIPTION	ECN	- R	CUST	SUP	CHK'D: BJPU				