



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Converter - Brake - Inverter Module (CBI2)

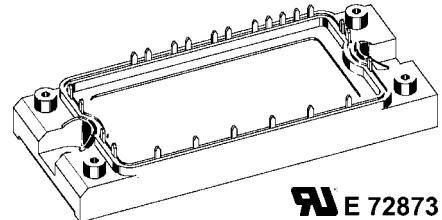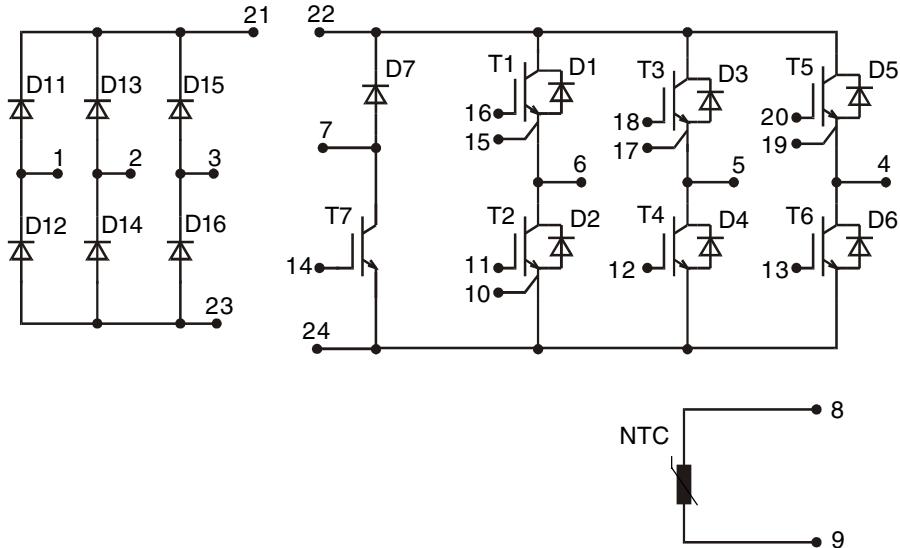

E 72873

Three Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600V$	$V_{CES} = 600 V$	$V_{CES} = 600 V$
$I_{DAVM} = 36 A$	$I_{C25} = 25 A$	$I_{C25} = 35 A$
$I_{FSM} = 300 A$	$V_{CE(sat)} = 1.9 V$	$V_{CE(sat)} = 1.9 V$

Input Rectifier Bridge D11 - D16

Symbol	Conditions	Maximum Ratings		
V_{RRM}		1600		V
I_{FAV}	$T_c = 80^\circ\text{C}$; sine 180°	25		A
I_{DAVM}	$T_c = 80^\circ\text{C}$; rectangular; $d = 1/3$	24		A
I_{FSM}	$T_{VJ} = 25^\circ\text{C}$; $t = 10 \text{ ms}$; sine 50 Hz	300		A
P_{tot}	$T_c = 25^\circ\text{C}$	100		W

Application: AC motor drives with

- Input from single or three phase grid
- Three phase synchronous or asynchronous motor
- electric braking operation

Features

- High level of integration - only one power semiconductor module required for the whole drive
- Fast rectifier diodes for enhanced EMC behaviour
- NPT IGBT technology with low saturation voltage, low switching losses, high RBSOA and short circuit ruggedness
- Epitaxial free wheeling diodes with Hiperfast and soft reverse recovery
- Industry standard package with insulated copper base plate and soldering pins for PCB mounting
- Temperature sense included

Symbol	Conditions	Characteristic Values		
		($T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
V_F	$I_F = 20 A$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.4 1.3	1.6 V
I_R	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.2	0.15 mA mA
t_{rr}	$V_R = 100 V$; $I_F = 15 A$; $di/dt = -15 A/\mu\text{s}$		1	μs
R_{thJC}	(per diode)			1.3 K/W

Output Inverter T1 - T6


Symbol	Conditions	Maximum Ratings		
V_{CES}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	600		V
V_{GES}	Continuous	± 20		V
V_{GEM}	Transient	± 30		V
I_{C25}	$T_c = 25^\circ\text{C}$	35		A
I_{C80}	$T_c = 80^\circ\text{C}$	25		A
RBSOA	$V_{GE} = \pm 15 \text{ V}; R_G = 47 \Omega; T_{VJ} = 125^\circ\text{C}$ Clamped inductive load; $L = 100 \mu\text{H}$	$I_{CM} = 40$		A
t_{sc} (SCSOA)	$V_{CE} = V_{CES}; V_{GE} = \pm 15 \text{ V}; R_G = 47 \Omega; T_{VJ} = 125^\circ\text{C}$ non-repetitive	$V_{CEK} \leq V_{CES}$	10	μs
P_{tot}	$T_c = 25^\circ\text{C}$	125		W

Symbol	Conditions	Characteristic Values		
		($T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)	min.	typ.
$V_{CE(sat)}$	$I_C = 20 \text{ A}; V_{GE} = 15 \text{ V}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.9	2.3
			2.2	V
$V_{GE(th)}$	$I_C = 0.5 \text{ mA}; V_{GE} = V_{CE}$	4.5		6.5
I_{CES}	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.4	0.6
I_{GES}	$V_{CE} = 0 \text{ V}; V_{GE} = \pm 20 \text{ V}$		200	nA
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	$\left. \begin{array}{l} \text{Inductive load, } T_{VJ} = 125^\circ\text{C} \\ V_{CE} = 300 \text{ V}; I_c = 20 \text{ A} \\ V_{GE} = \pm 15 \text{ V}; R_G = 47 \Omega \end{array} \right\}$	50		ns
		55		ns
		300		ns
		30		ns
		0.92		mJ
		0.68		mJ
C_{ies}	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$	1100		pF
Q_{Gon}	$V_{CE} = 300 \text{ V}; V_{GE} = 15 \text{ V}; I_c = 20 \text{ A}$	65		nC
R_{thJC}	(per IGBT)		1	K/W

Output Inverter D1 - D6

Symbol	Conditions	Maximum Ratings		
I_{F25}	$T_c = 25^\circ\text{C}$	35		A
I_{F80}	$T_c = 80^\circ\text{C}$	24		A

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
V_F	$I_F = 20 \text{ A}; V_{GE} = 0 \text{ V}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		2.1	V
			1.4	V
t_{rr} I_{RM}	$\left. \begin{array}{l} I_F = 15 \text{ A}; di_F/dt = -400 \text{ A}/\mu\text{s} \\ V_R = 300 \text{ V}; V_{GE} = 0 \text{ V} \end{array} \right\}$	13		A
		90		ns
R_{thJC}	(per diode)		2.1	K/W

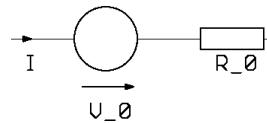Equivalent Circuits for Simulation**Conduction****D11 - D16**

Rectifier Diode (typ. at $T_J = 125^\circ\text{C}$)
 $V_o = 1.12 \text{ V}; R_o = 0.11 \text{ m}\Omega$

T1 - T6 / D1 - D6


IGBT (typ. at $V_{GE} = 15 \text{ V}; T_J = 125^\circ\text{C}$)
 $V_o = 0.9 \text{ V}; R_o = 65 \text{ m}\Omega$

Free Wheeling Diode (typ. at $T_J = 125^\circ\text{C}$)
 $V_o = 1.09 \text{ V}; R_o = 12 \text{ m}\Omega$

T7 / D7

IGBT (typ. at $V_{GE} = 15 \text{ V}; T_J = 125^\circ\text{C}$)
 $V_o = 0.99 \text{ V}; R_o = 81 \text{ m}\Omega$

Free Wheeling Diode (typ. at $T_J = 125^\circ\text{C}$)
 $V_o = 1.07 \text{ V}; R_o = 23 \text{ m}\Omega$

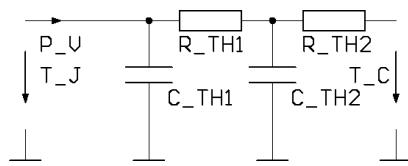Thermal Response**D11 - D16**

Rectifier Diode (typ.)
 $C_{th1} = 0.106 \text{ J/K}; R_{th1} = 1.06 \text{ K/W}$
 $C_{th2} = 0.79 \text{ J/K}; R_{th2} = 0.239 \text{ K/W}$

T1 - T6 / D1 - D6

IGBT (typ.)
 $C_{th1} = 0.108 \text{ J/K}; R_{th1} = 0.79 \text{ K/W}$
 $C_{th2} = 0.921 \text{ J/K}; R_{th2} = 0.209 \text{ K/W}$

Free Wheeling Diode (typ.)

$C_{th1} = 0.065 \text{ J/K}; R_{th1} = 1.766 \text{ K/W}$
 $C_{th2} = 0.636 \text{ J/K}; R_{th2} = 0.344 \text{ K/W}$

T7 / D7

IGBT (typ.)
 $C_{th1} = 0.077 \text{ J/K}; R_{th1} = 1.111 \text{ K/W}$
 $C_{th2} = 0.732 \text{ J/K}; R_{th2} = 0.279 \text{ K/W}$

Free Wheeling Diode (typ.)

$C_{th1} = 0.043 \text{ J/K}; R_{th1} = 2.738 \text{ K/W}$
 $C_{th2} = 0.54 \text{ J/K}; R_{th2} = 0.462 \text{ K/W}$

Brake Chopper T7

Symbol	Conditions	Maximum Ratings		
V_{CES}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	600		V
V_{GES}	Continuous	± 20		V
V_{GEM}	Transient	± 30		V
I_{C25}	$T_C = 25^\circ\text{C}$	25		A
I_{C80}	$T_C = 80^\circ\text{C}$	18		A
RBSOA	$V_{GE} = \pm 15 \text{ V}$; $R_G = 68 \Omega$; $T_{VJ} = 125^\circ\text{C}$ Clamped inductive load; $L = 100 \mu\text{H}$	$I_{CM} = 30$ $V_{CEK} \leq V_{CES}$		A
t_{sc} (SCSOA)	$V_{CE} = V_{CES}$; $V_{GE} = \pm 15 \text{ V}$; $R_G = 68 \Omega$; $T_{VJ} = 125^\circ\text{C}$ non-repetitive	10		μs
P_{tot}	$T_C = 25^\circ\text{C}$	90		W

Symbol	Conditions	Characteristic Values		
		$(T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
$V_{CE(sat)}$	$I_C = 15 \text{ A}$; $V_{GE} = 15 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.9 2.1	2.3 V	V
$V_{GE(th)}$	$I_C = 0.4 \text{ mA}$; $V_{GE} = V_{CE}$	4.5		6.5 V
I_{CES}	$V_{CE} = V_{CES}$; $V_{GE} = 0 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	0.3	0.5 mA	mA
I_{GES}	$V_{CE} = 0 \text{ V}$; $V_{GE} = \pm 20 \text{ V}$		200 nA	
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	Inductive load, $T_{VJ} = 125^\circ\text{C}$ $V_{CE} = 300 \text{ V}$; $I_C = 15 \text{ A}$ $V_{GE} = \pm 15 \text{ V}$; $R_G = 68 \Omega$	30 50 270 40 0.7 0.5	ns ns ns ns mJ mJ	
C_{ies} Q_{Gon}	$V_{CE} = 25 \text{ V}$; $V_{GE} = 0 \text{ V}$; $f = 1 \text{ MHz}$ $V_{CE} = 300 \text{ V}$; $V_{GE} = 15 \text{ V}$; $I_C = 15 \text{ A}$	800 57	pF nC	
R_{thJC}			1.39	K/W

Brake Chopper D7

Symbol	Conditions	Maximum Ratings		
V_{RRM}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	600		V
I_{F25}	$T_C = 25^\circ\text{C}$	22		A
I_{F80}	$T_C = 80^\circ\text{C}$	15		A
Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
V_F	$I_F = 15 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.5	2.2 V	V
I_R	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	0.07	0.06 mA	mA
I_{RM} t_{rr}	$I_F = 10 \text{ A}$; $di_F/dt = -400 \text{ A}/\mu\text{s}$; $T_{VJ} = 125^\circ\text{C}$ $V_R = 300 \text{ V}$	11 80	A ns	
R_{thJC}			3.2	K/W

Temperature Sensor NTC


Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
R_{25}	$T = 25^\circ\text{C}$	4.75	5.0	5.25 k Ω
$B_{25/50}$			3375	K

Module

Symbol	Conditions	Maximum Ratings		
T_{VJ}	Operating	-40...+125	$^\circ\text{C}$	
T_{JM}		150	$^\circ\text{C}$	
T_{stg}		-40...+125	$^\circ\text{C}$	
V_{ISOL}	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$	2500	V~	
M_d	Mounting torque (M5)	2.7 - 3.3	Nm	

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$R_{pin-chip}$			5	m Ω
d_s	Creepage distance on surface	6		mm
d_A	Strike distance in air	6		mm
R_{thCH}	with heatsink compound	0.02		K/W
Weight		180		g

Dimensions in mm (1 mm = 0.0394")

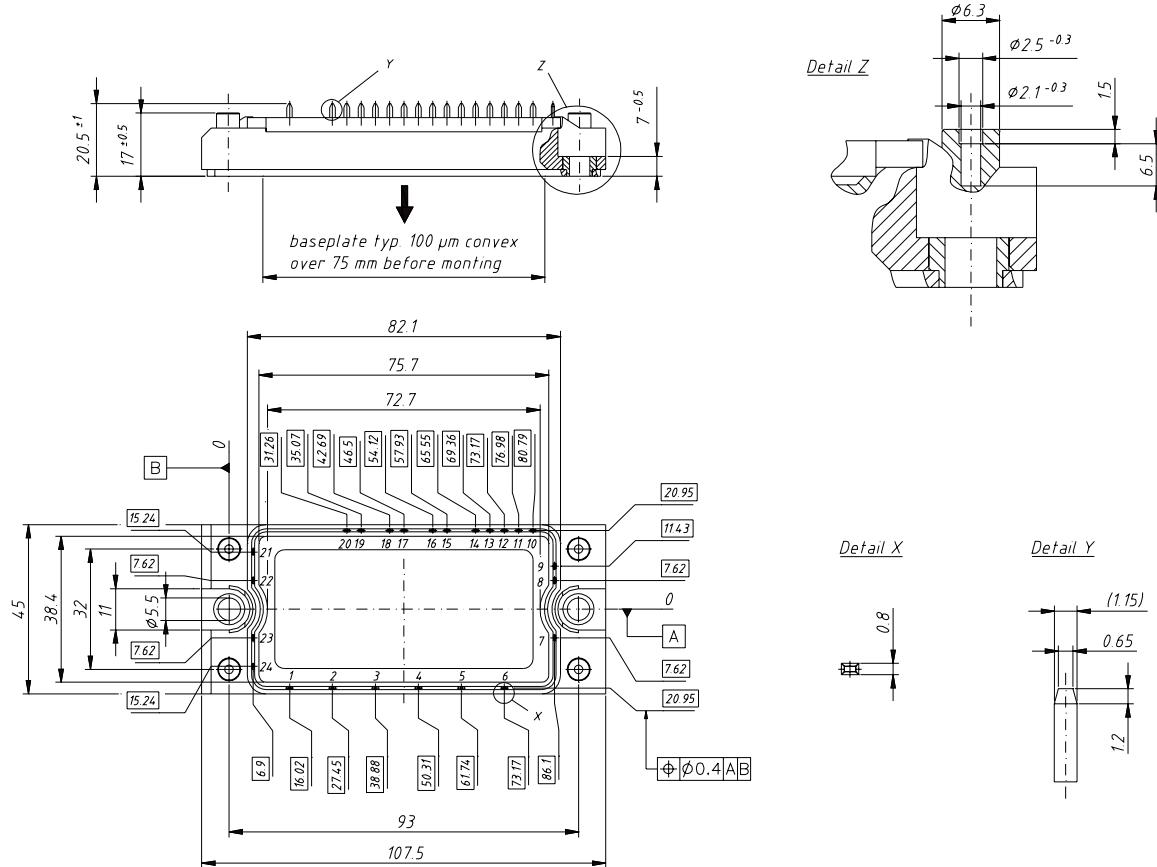

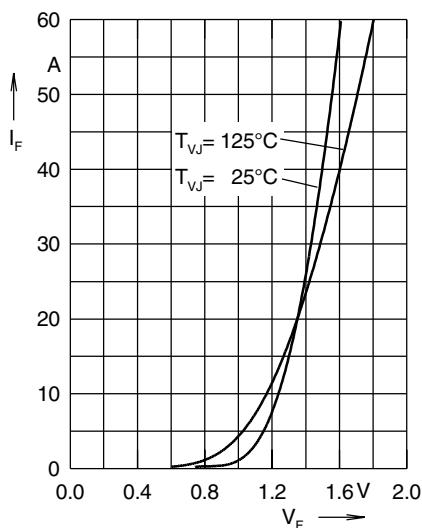
Input Rectifier Bridge D11 - D16


Fig. 1 Forward current versus voltage drop per diode

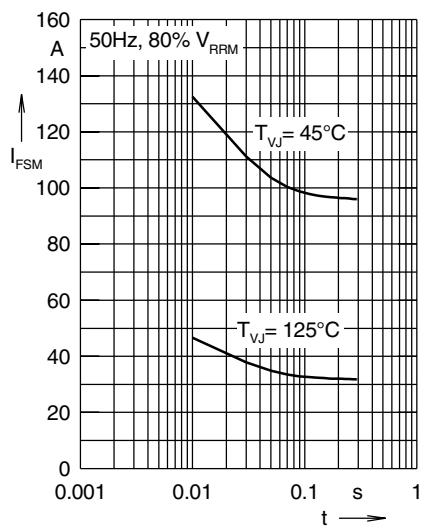


Fig. 2 Surge overload current

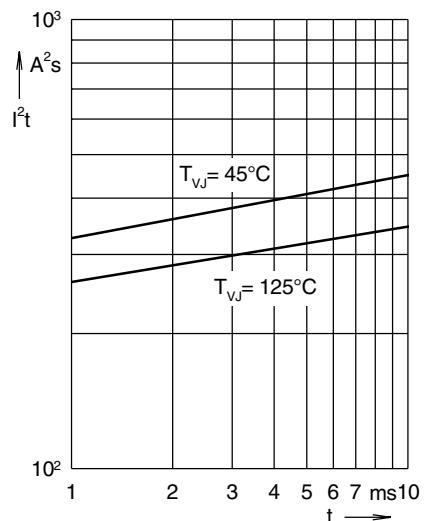


Fig. 3 I^2t versus time per diode

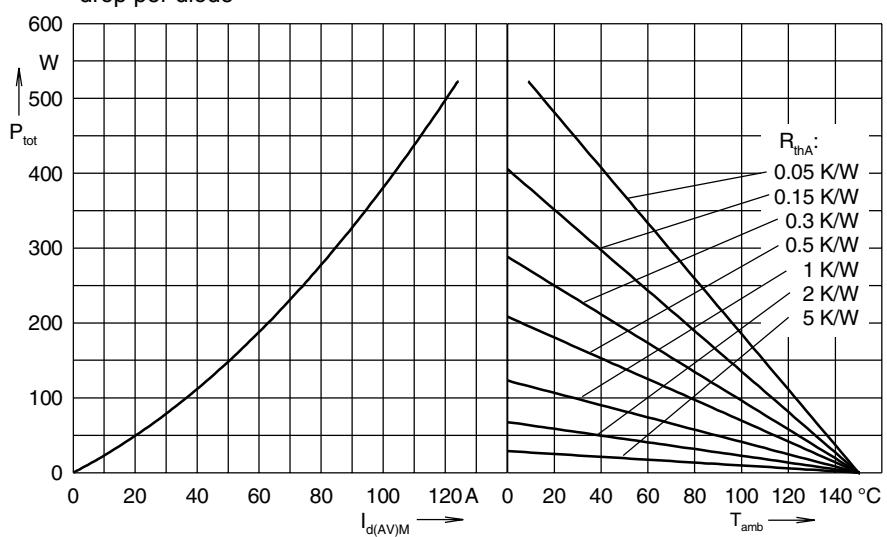


Fig. 4 Power dissipation versus direct output current and ambient temperature, sin 1

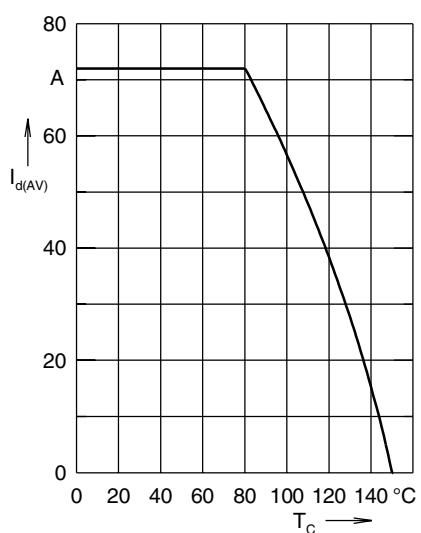


Fig. 5 Max. forward current versus case temperature

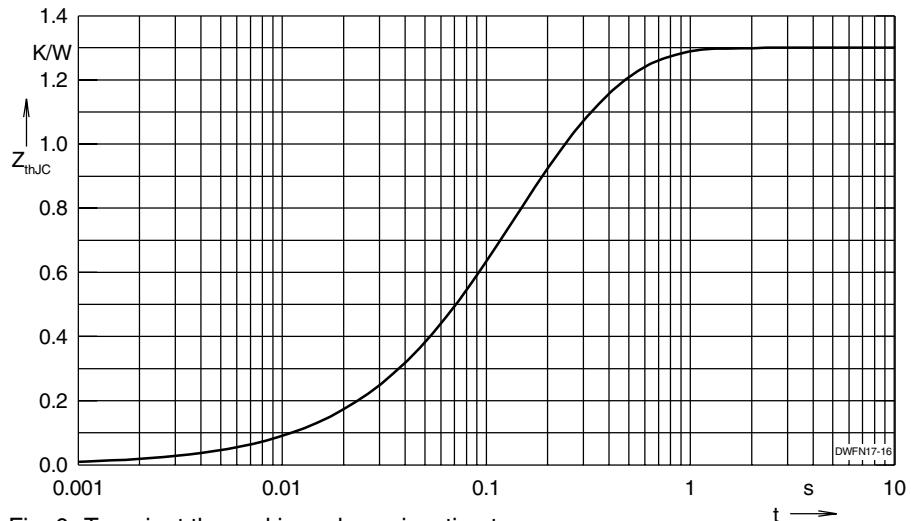
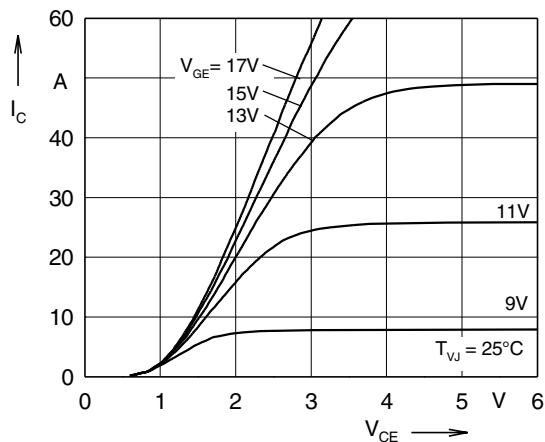
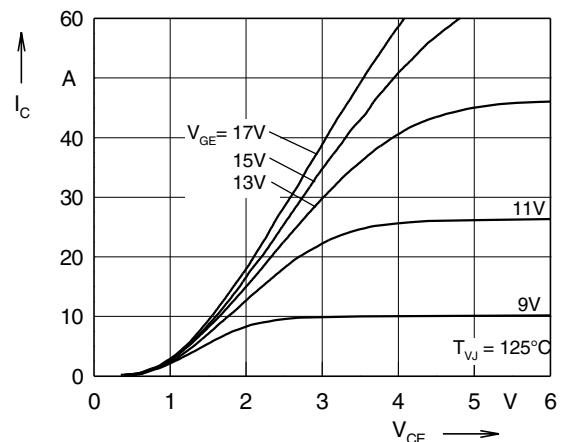
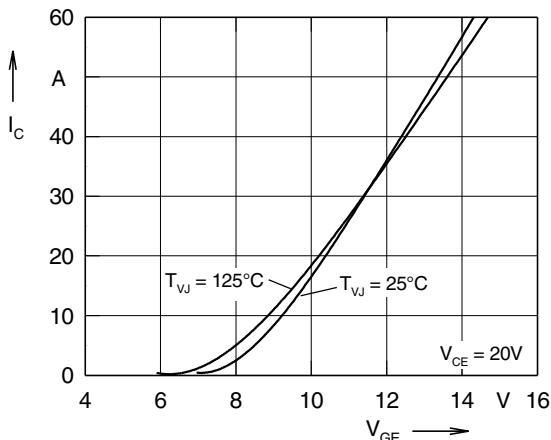
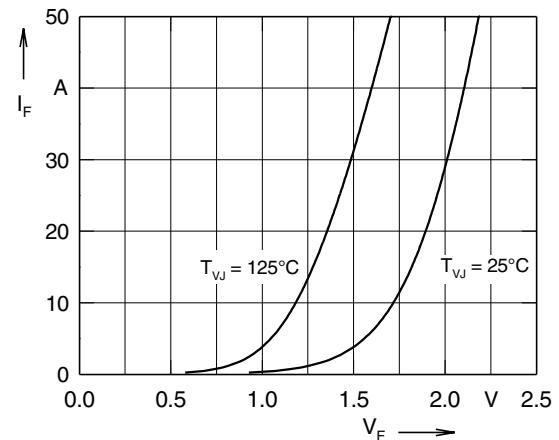
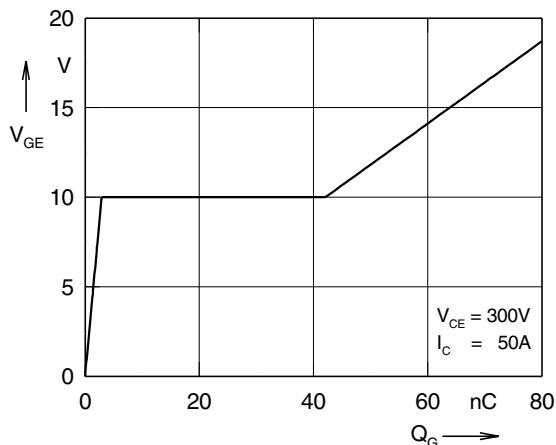
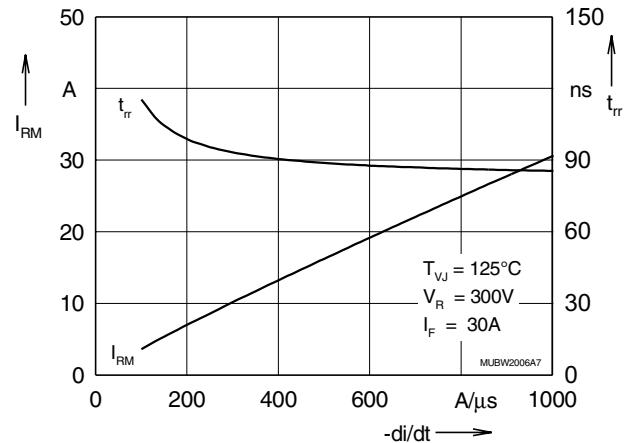


Fig. 6 Transient thermal impedance junction to case

Output Inverter T1 - T6 / D1 - D6

Fig. 7 Typ. output characteristics

Fig. 8 Typ. output characteristics

Fig. 9 Typ. transfer characteristics

Fig. 10 Typ. forward characteristics of free wheeling diode

Fig. 11 Typ. turn on gate charge

Fig. 12 Typ. turn off characteristics of free wheeling diode

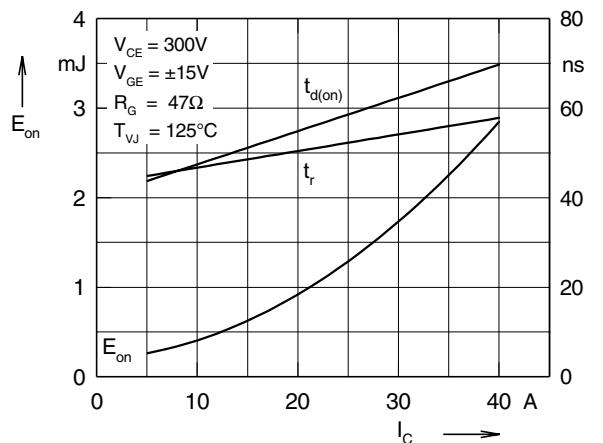
Output Inverter T1 - T6 / D1 - D6


Fig. 13 Typ. turn on energy and switching times versus collector current

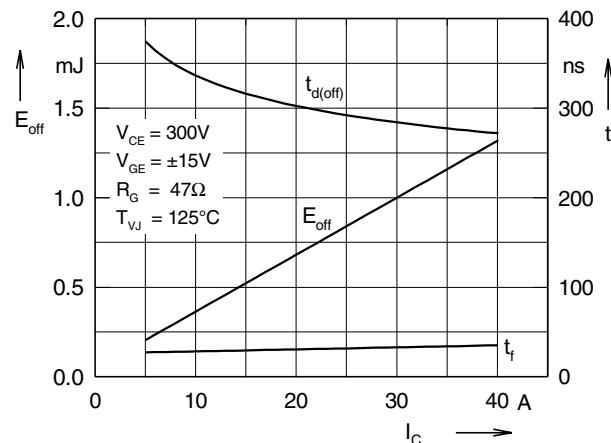


Fig. 14 Typ. turn off energy and switching times versus collector current

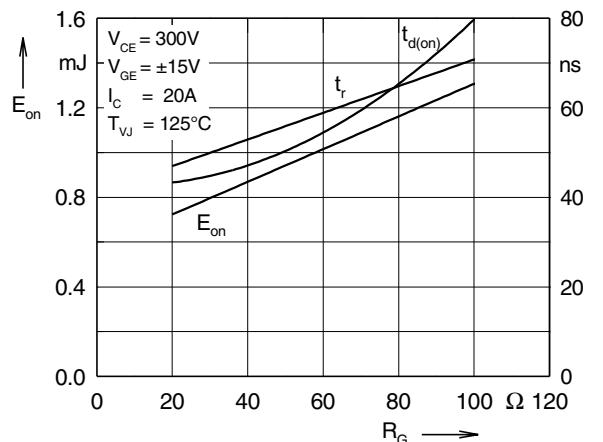


Fig. 15 Typ. turn on energy and switching times versus gate resistor

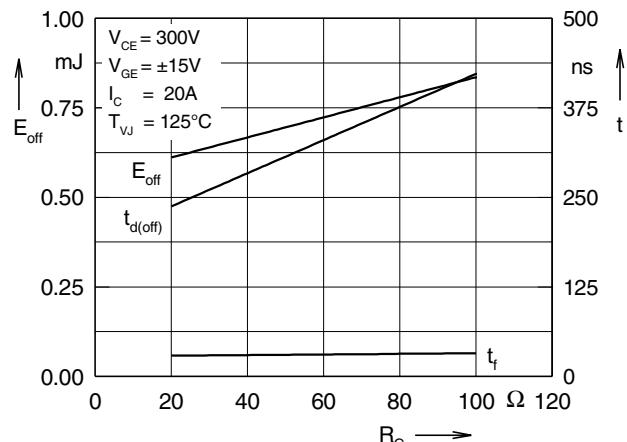


Fig. 16 Typ. turn off energy and switching times versus gate resistor

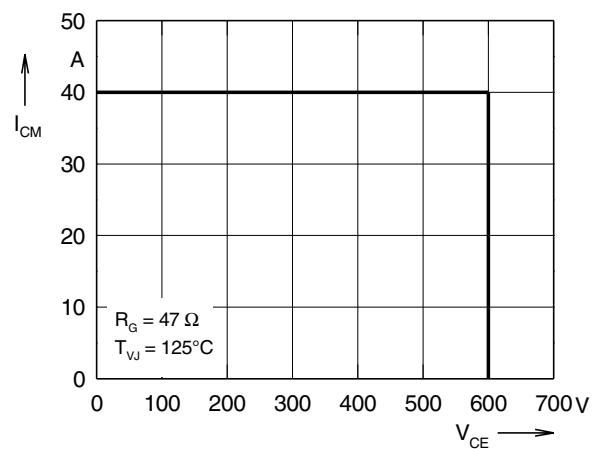


Fig. 17 Reverse biased safe operating area RBSOA

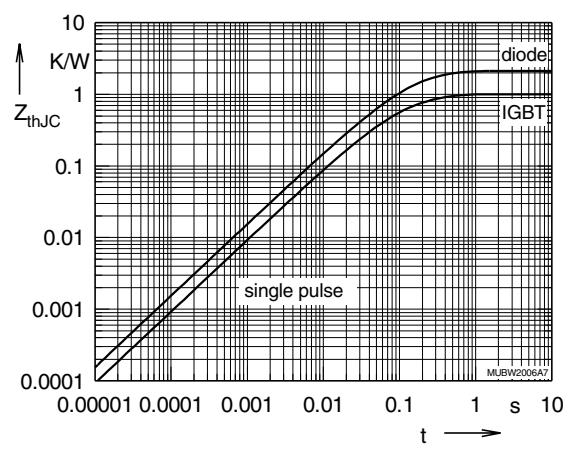


Fig. 18 Typ. transient thermal impedance

Brake Chopper T7 / D7

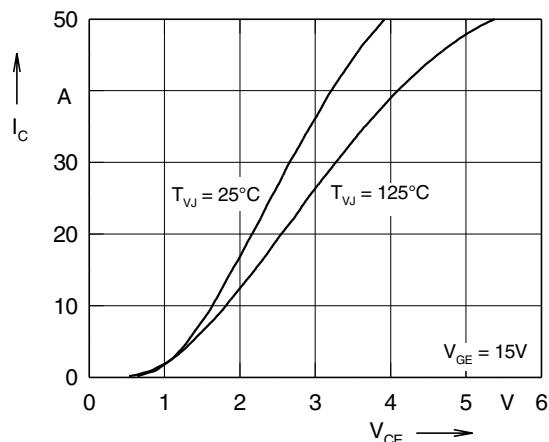


Fig. 19 Typ. output characteristics

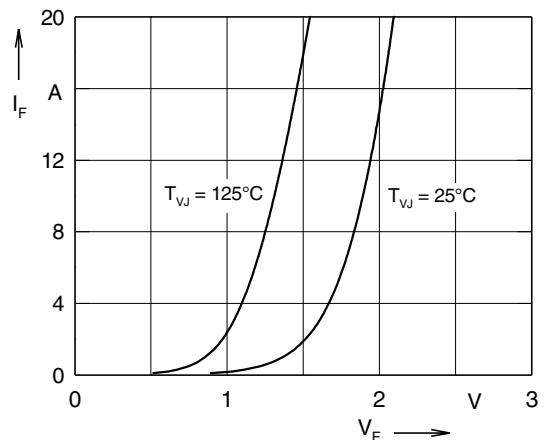


Fig. 20 Typ. forward characteristics of free wheeling diode

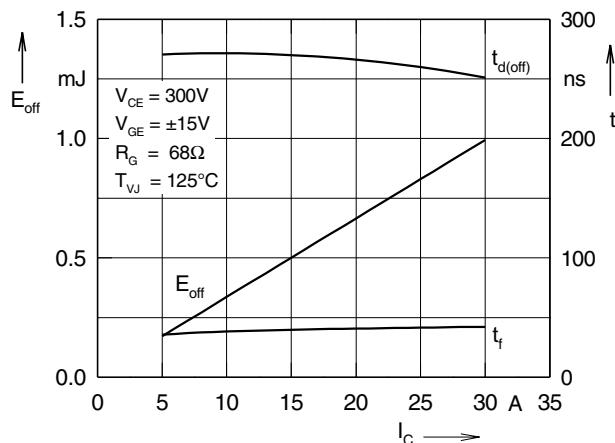


Fig. 21 Typ. turn off energy and switching times versus collector current

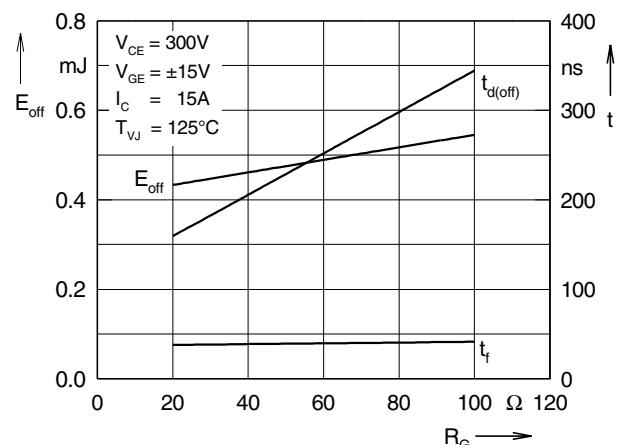


Fig. 22 Typ. turn off energy and switching times versus gate resistor

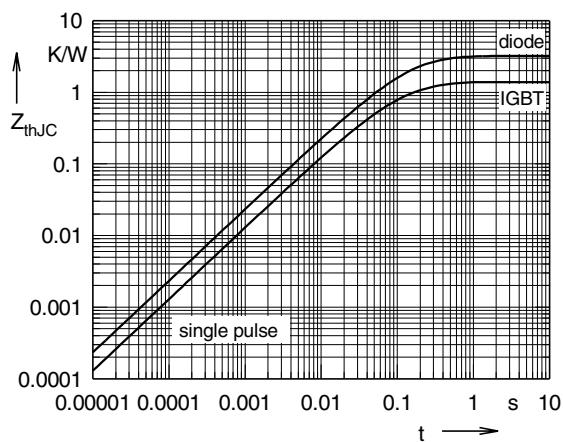


Fig. 23 Typ. transient thermal impedance

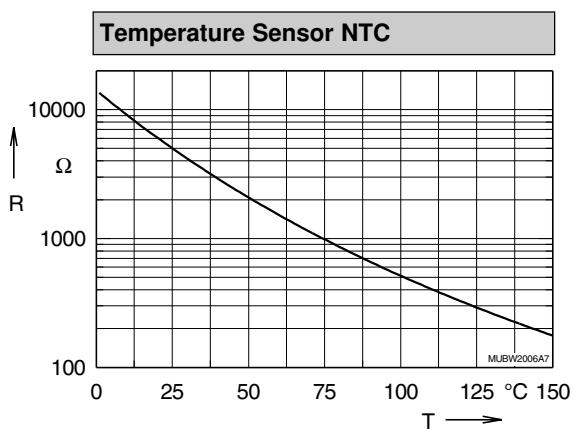


Fig. 24 Typ. thermistorresistance versus temperature