



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

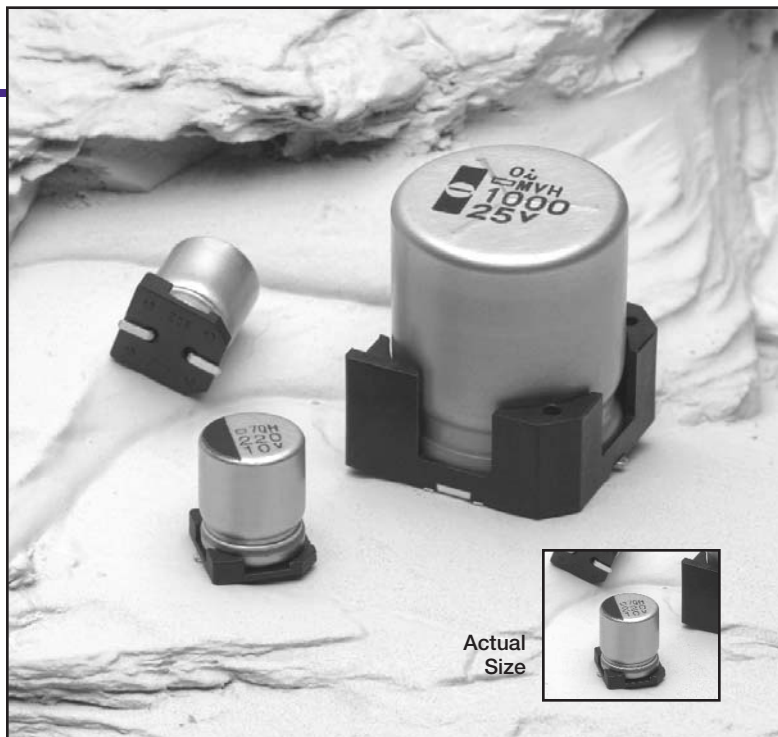


MVH Series

UPGRADE
Engineering Bulletin Jul 03



- Surface Mount
- Vertical Chip
- High Temperature
- Solvent Proof (10-50V)
- +125°C Maximum Temperature



The MVH series capacitors are surface mount, high temperature vertical chip capacitors designed for reflow soldering. This series has been expanded to cover a wider variety of CV and case sizes. The MVH capacitors have a maximum operating temperature of +125°C, which makes them ideal for use in automotive and other high temperature applications.

The MVH series capacitors *except for those rated at 63-450 volts* are solvent proof. Refer to the Mini-Glossary for cleaning guidelines and recommended cleaning agents that are compatible with United Chemi-Con products.

Summary of Specifications

- Surface mount lead terminals.
- Capacitance range: 3.3 to 4,700 μ F.
- Voltage range: 10 to 450VDC.
- Category temperature range: -40°C to +125°C.
- Leakage current: See specifications table for leakage current values at +20°C.
- Standard capacitance tolerance: $\pm 20\%$
- Nominal case size (D \times L): 6.3 \times 5.7mm to 18 \times 21.5mm.
- Rated lifetime: 1,000 to 5,000 hours at +125°C depending on case size and voltage.

MVH Specifications

Item	Characteristics																																																					
Category Temperature Range	- 40 to +125°C																																																					
Rated Voltage Range	10 to 450VDC																																																					
Capacitance Range	3.3 to 4,700 μ F																																																					
Capacitance Tolerance	\pm 20% (M) at +20°C, 120Hz																																																					
Leakage Current	10-100V: $I = 0.03CV$ or $4\mu A$, whichever is greater, after 2 minutes at +20°C. 160-450V: $I = 0.04CV + 100\mu A$ after 2 minutes at +20°C. Where I = Max. leakage current (μA), C = Nominal capacitance (μF) and V = Rated voltage (V)																																																					
Dissipation Factor (Tan δ)	At +20°C, 120Hz <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Rated Voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160-250</th> <th>400-450</th> </tr> </thead> <tbody> <tr> <td>Case F60-J10</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.14</td> <td>0.18</td> <td>0.18</td> <td>-</td> <td>-</td> </tr> <tr> <td>Case K14-M22</td> <td>0.22</td> <td>0.18</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.14</td> <td>0.10</td> <td>0.20</td> <td>0.24</td> </tr> </tbody> </table> When nominal capacitance exceeds 1,000 μ F, add 0.02 to the values above for each 1,000 μ F increase.	Rated Voltage (V)	10	16	25	35	50	63	100	160-250	400-450	Case F60-J10	0.24	0.20	0.16	0.14	0.14	0.18	0.18	-	-	Case K14-M22	0.22	0.18	0.16	0.14	0.12	0.14	0.10	0.20	0.24																							
Rated Voltage (V)	10	16	25	35	50	63	100	160-250	400-450																																													
Case F60-J10	0.24	0.20	0.16	0.14	0.14	0.18	0.18	-	-																																													
Case K14-M22	0.22	0.18	0.16	0.14	0.12	0.14	0.10	0.20	0.24																																													
Low Temperature Characteristics	At 120Hz, impedance (Z) ratio between the -25°C or -40°C value and +20°C value shall not exceed the values given below. <table border="1" style="margin-top: 10px;"> <thead> <tr> <th colspan="2">Rated Voltage (V)</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160-250</th> <th>400-450</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Z(-25°C) / Z(+20°C)</td> <td>F60-J10</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>-</td> <td>-</td> </tr> <tr> <td>K14-M22</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> </tr> <tr> <td rowspan="2">Z(-40°C) / Z(+20°C)</td> <td>F60-J10</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>4</td> <td>4</td> <td>-</td> <td>-</td> </tr> <tr> <td>K14-M22</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>6</td> <td>10</td> </tr> </tbody> </table>	Rated Voltage (V)		10	16	25	35	50	63	100	160-250	400-450	Z(-25°C) / Z(+20°C)	F60-J10	4	3	2	2	2	2	2	-	-	K14-M22	4	3	2	2	2	2	2	3	6	Z(-40°C) / Z(+20°C)	F60-J10	10	8	6	4	4	4	4	-	-	K14-M22	8	6	4	3	3	3	3	6	10
Rated Voltage (V)		10	16	25	35	50	63	100	160-250	400-450																																												
Z(-25°C) / Z(+20°C)	F60-J10	4	3	2	2	2	2	2	-	-																																												
	K14-M22	4	3	2	2	2	2	2	3	6																																												
Z(-40°C) / Z(+20°C)	F60-J10	10	8	6	4	4	4	4	-	-																																												
	K14-M22	8	6	4	3	3	3	3	6	10																																												
Endurance (Load Life)	The following specifications shall be satisfied when the capacitors are restored to +20°C after subjecting them to the DC rated voltage for the specified test time at +125°C. <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Case Code</th> <th>F60-H63</th> <th>H10 & J10</th> <th>K14-M22</th> <th>K14-M22</th> </tr> </thead> <tbody> <tr> <td>Rated Voltage</td> <td>10-100V</td> <td>10-100V</td> <td>10-100V</td> <td>160-450V</td> </tr> <tr> <td>Test Time</td> <td>1,000 Hours</td> <td>2,000 Hours</td> <td>5,000 Hours</td> <td>2,000 Hours</td> </tr> </tbody> </table> Capacitance change : $\leq \pm 30\%$ of the initial measured value Tan δ (DF) : $\leq 300\%$ of the initial specified value Leakage current : \leq initial specified value	Case Code	F60-H63	H10 & J10	K14-M22	K14-M22	Rated Voltage	10-100V	10-100V	10-100V	160-450V	Test Time	1,000 Hours	2,000 Hours	5,000 Hours	2,000 Hours																																						
Case Code	F60-H63	H10 & J10	K14-M22	K14-M22																																																		
Rated Voltage	10-100V	10-100V	10-100V	160-450V																																																		
Test Time	1,000 Hours	2,000 Hours	5,000 Hours	2,000 Hours																																																		
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to +20°C after exposing them for the specified test time at +125°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements. <table border="1" style="margin-top: 10px;"> <thead> <tr> <th>Case Code</th> <th colspan="2">F60-M22</th> </tr> </thead> <tbody> <tr> <td>Rated Voltage</td> <td>10-250V</td> <td>400-450V</td> </tr> <tr> <td>Test Time</td> <td>1,000 Hours</td> <td>500 Hours</td> </tr> </tbody> </table> Capacitance change: $\leq \pm 30\%$ of the initial measured value Tan δ (DF) : $\leq 300\%$ of the initial specified value Leakage current : \leq initial specified value for 10-50V : $\leq 500\%$ of the initial specified value for 63-450V	Case Code	F60-M22		Rated Voltage	10-250V	400-450V	Test Time	1,000 Hours	500 Hours																																												
Case Code	F60-M22																																																					
Rated Voltage	10-250V	400-450V																																																				
Test Time	1,000 Hours	500 Hours																																																				


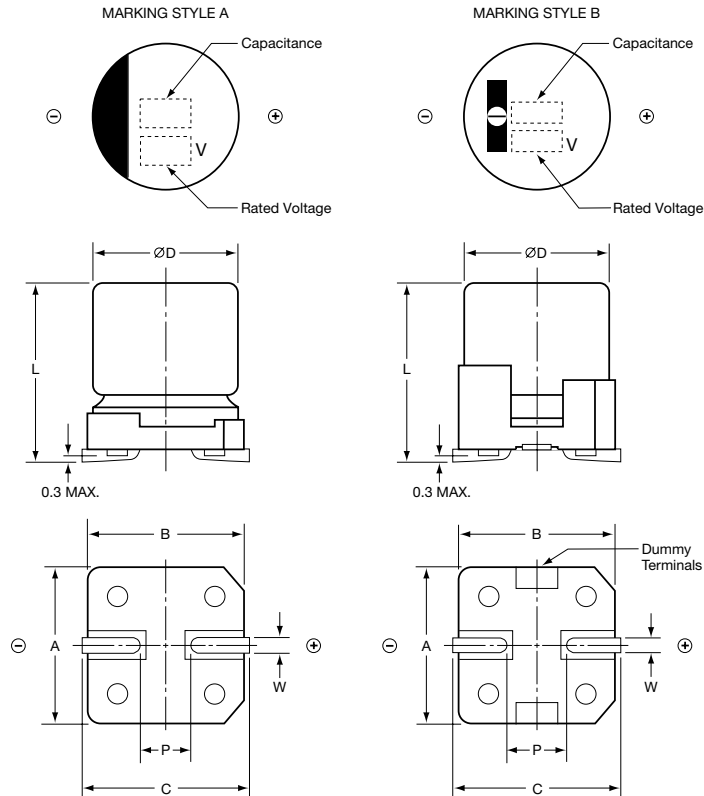
Diagram of Dimensions

Vertical Chip SMD Lead Terminals


Unit: mm

VC Type $\varnothing D = \varnothing 6.3 - \varnothing 12.5^*$
VD Type $\varnothing D = \varnothing 16 \& \varnothing 18$

Recommended PCB Land Patterns

VC Type $\varnothing D = \varnothing 6.3 - \varnothing 12.5$


Solder Land

VD Type $\varnothing D = \varnothing 16 \& \varnothing 18$


Solder Land

*Marking Style B is used for all $\varnothing 12.5$ VC Type products.

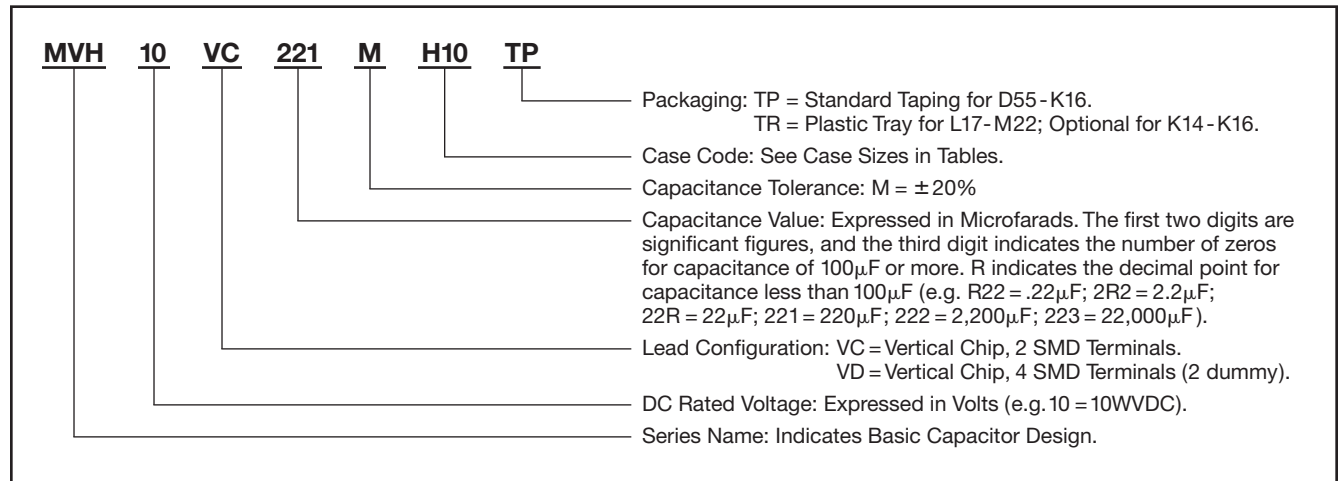
Refer to Packaging section for Surface Mount taping, reel and tray specifications and Surface Mount Soldering section for reflow soldering conditions.

Case and PCB Land Pattern Dimensions

Case Code	$\varnothing D \pm 0.5$	L	A ± 0.2	B ± 0.2	C ± 0.2	W	P	a	b	c	d	e	f
F60	$\varnothing 6.3$	5.7 ± 0.3	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6	-	-	-
F80	$\varnothing 6.3$	7.7 ± 0.3	6.6	6.6	7.2	0.5-0.8	1.9	1.9	3.5	1.6	-	-	-
H63	$\varnothing 8$	6.3 ± 0.5	8.3	8.3	9.0	0.5-0.8	2.3	2.3	4.5	1.6	-	-	-
H10	$\varnothing 8$	10.0 ± 0.5	8.3	8.3	9.0	0.7-1.1	3.1	3.1	4.2	2.2	-	-	-
J10	$\varnothing 10$	10.0 ± 0.5	10.3	10.3	11.0	0.7-1.1	4.5	4.5	4.4	2.2	-	-	-
K14	$\varnothing 12.5$	13.5 ± 0.5	13.0	13.0	13.7	1.0-1.3	4.2	4.0	5.7	2.5	-	-	-
K16	$\varnothing 12.5$	16.0 ± 0.5	13.0	13.0	13.7	1.0-1.3	4.2	4.0	5.7	2.5	-	-	-
L17	$\varnothing 16$	16.5 ± 0.5	17.0	17.0	18.0	1.0-1.3	6.5	6.0	6.9	2.5	6.5	11.0	19.2
L22	$\varnothing 16$	21.5 ± 0.5	17.0	17.0	18.0	1.0-1.3	6.5	6.0	6.9	2.5	6.5	11.0	19.2
M17	$\varnothing 18$	16.5 ± 0.5	19.0	19.0	20.0	1.0-1.3	6.5	6.0	7.9	2.5	6.5	13.0	21.2
M22	$\varnothing 18$	21.5 ± 0.5	19.0	19.0	20.0	1.0-1.3	6.5	6.0	7.9	2.5	6.5	13.0	21.2

Part Numbering System for MVH Series

When ordering, always specify complete catalog number for MVH Series.



Standard Voltage Ratings - Surface Mount (10-100V)

Rated Voltage (WVDC)	Capacitance (μ F)	Catalog Part Number	Nominal Case Size* D x L (mm)	Case Code	Maximum ESR (Ω) at		Rated Ripple Current (mA rms) at +125°C, 100kHz
					+20°C, 100kHz	-40°C, 100kHz	
10 Volts 13 Volts Surge	100	MVH10VC101MF80TP	6.3 x 7.7	F80	2.3	46	72
	100	MVH10VC101MH63TP	8 x 6.3	H63	2.3	46	72
	220	MVH10VC221MH10TP	8 x 10	H10	1.0	20	136
	330	MVH10VC331MJ10TP	10 x 10	J10	0.7	13.4	188
	1,000	MVH10VC102MK14TP	12.5 x 13.5	K14	0.14	2.1	750
	2,200	MVH10VD222ML17TR	16 x 16.5	L17	0.10	1.5	1,000
	2,200	MVH10VD222MM17TR	18 x 16.5	M17	0.10	1.5	1,200
	3,300	MVH10VD332MM17TR	18 x 16.5	M17	0.10	1.5	1,200
4,700	MVH10VD472MM22TR	18 x 21.5	M22	0.058	0.87	1,550	
16 Volts 20 Volts Surge	47	MVH16VC47RMF60TP	6.3 x 5.7	F60	3.3	66	43
	470	MVH16VC471MK14TP	12.5 x 13.5	K14	0.14	2.1	750
	680	MVH16VC681MK14TP	12.5 x 13.5	K14	0.14	2.1	750
	680	MVH16VD681ML17TR	16 x 16.5	L17	0.10	1.5	1,000
	1,000	MVH16VD102MM17TR	18 x 16.5	M17	0.10	1.5	1,200
	2,200	MVH16VD222MM17TR	18 x 16.5	M17	0.10	1.5	1,200
25 Volts 32 Volts Surge	33	MVH25VC33RMF60TP	6.3 x 5.7	F60	3.3	66	45
	47	MVH25VC47RMF80TP	6.3 x 7.7	F80	2.3	46	68
	47	MVH25VC47RMH63TP	8 x 6.3	H63	2.3	46	68
	100	MVH25VC101MH10TP	8 x 10	H10	1.0	20	126
	220	MVH25VC221MJ10TP	10 x 10	J10	0.7	13.4	211
	330	MVH25VC331MK14TP	12.5 x 13.5	K14	0.14	2.1	750
	470	MVH25VC471MK14TP	12.5 x 13.5	K14	0.14	2.1	750
	470	MVH25VD471ML17TR	16 x 16.5	L17	0.10	1.5	1,000
	680	MVH25VD681ML17TR	16 x 16.5	L17	0.10	1.5	1,000
	680	MVH25VD681MM17TR	18 x 16.5	M17	0.10	1.5	1,200
1,000	MVH25VD102MM22TR	18 x 21.5	M22	0.058	0.87	1,550	
35 Volts 44 Volts Surge	10	MVH35VC10RMF60TP	6.3 x 5.7	F60	3.3	66	27
	22	MVH35VC22RMF60TP	6.3 x 5.7	F60	3.3	66	39
	33	MVH35VC33RMF80TP	6.3 x 7.7	F80	2.3	46	62
	33	MVH35VC33RMH63TP	8 x 6.3	H63	2.3	46	62
	47	MVH35VC47RMH10TP	8 x 10	H10	1.0	20	92
	100	MVH35VC101MJ10TP	10 x 10	J10	0.7	13.4	151
	330	MVH35VC331MK14TP	12.5 x 13.5	K14	0.14	2.1	750
	330	MVH35VD331ML17TR	16 x 16.5	L17	0.10	1.5	1,000
	470	MVH35VC471MK16TP	12.5 x 16	K16	0.11	1.5	900
	470	MVH35VD471ML17TR	16 x 16.5	L17	0.10	1.5	1,000
680	MVH35VD681MM17TR	18 x 16.5	M17	0.10	1.5	1,200	

*Refer to diagrams for detailed case size dimensions.

Standard Voltage Ratings - Surface Mount (10-100V)

Rated Voltage (WVDC)	Capacitance (µF)	Catalog Part Number	Nominal Case Size* D x L (mm)	Case Code	Maximum ESR (Ω) at		Rated Ripple Current (mA rms) at +125°C, 100kHz
					+20°C, 100kHz	-40°C, 100kHz	

50 Volts 63 Volts Surge	10	MVH50VC10RMF60TP	6.3 x 5.7	F60	3.3	66	38
	22	MVH50VC22RMF80TP	6.3 x 7.7	F80	2.3	46	50
	22	MVH50VC22RMH63TP	8 x 6.3	H63	2.3	46	50
	33	MVH50VC33RMH10TP	8 x 10	H10	1.0	20	83
	47	MVH50VC47RMJ10TP	10 x 10	J10	0.7	13.4	111
	100	MVH50VC101MK14TP	12.5 x 13.5	K14	0.23	3.5	550
	220	MVH50VC221MK14TP	12.5 x 13.5	K14	0.23	3.5	550
	220	MVH50VD221ML17TR	16 x 16.5	L17	0.15	2.3	850
	330	MVH50VC331MK16TP	12.5 x 16	K16	0.18	2.7	700
	330	MVH50VD331ML17TR	16 x 16.5	L17	0.15	2.3	850
470	MVH50VD471MM17TR	18 x 16.5	M17	0.15	2.3	920	

63 Volts 79 Volts Surge Not Solvent Proof	10	MVH63VC10RMF80TP	6.3 x 7.7	F80	2.3	115	42
	10	MVH63VC10RMH63TP	8 x 6.3	H63	2.3	115	42
	22	MVH63VC22RMH10TP	8 x 10	H10	1.0	50	56
	33	MVH63VC33RMJ10TP	10 x 10	J10	0.7	35	71
	100	MVH63VC101MK14TP	12.5 x 13.5	K14	0.25	12.5	500
	220	MVH63VC221MK16TP	12.5 x 16	K16	0.2	10	600
	330	MVH63VD331ML17TR	16 x 16.5	L17	0.18	9	820
	470	MVH63VD471ML22TR	16 x 21.5	L22	0.11	5.5	1,100

100 Volts 125 Volts Surge Not Solvent Proof	10	MVH100VC10RMH10TP	8 x 10	H10	1.0	50	53
	22	MVH100VC22RMJ10TP	10 x 10	J10	0.7	35	63
	47	MVH100VC47RMK14TP	12.5 x 13.5	K14	0.33	16.5	450
	68	MVH100VC68RMK16TP	12.5 x 16	K16	0.26	13	550
	100	MVH100VD101ML17TR	16 x 16.5	L17	0.24	12	650
	220	MVH100VD221MM22TR	18 x 21.5	M22	0.16	8	950

Standard Voltage Ratings - Surface Mount (160-450V)

Rated Voltage (WVDC)	Capacitance (µF)	Catalog Part Number	Nominal Case Size* D x L (mm)	Case Code	Maximum ESR (Ω) at		Rated Ripple Current (mA rms) at +125°C, 120Hz
					+20°C, 120Hz	+125°C, 120Hz	

160 Volts 200 Volts Surge Not Solvent Proof	10	MVH160VC10RMK14TP	12.5 x 13.5	K14	33.16	100
	22	MVH160VD22RML17TR	16 x 16.5	L17	15.07	180
	33	MVH160VD33RMM17TR	18 x 16.5	M17	10.05	245
	68	MVH160VD68RMM22TR	18 x 21.5	M22	4.88	380

200 Volts 250 Volts Surge Not Solvent Proof	10	MVH200VC10RMK14TP	12.5 x 13.5	K14	33.16	100
	22	MVH200VD22RML17TR	16 x 16.5	L17	15.07	180
	33	MVH200VD33RML22TR	16 x 21.5	L22	10.05	250
	33	MVH200VD33RMM17TR	18 x 16.5	M17	10.05	245
	47	MVH200VD47RMM22TR	18 x 21.5	M22	7.05	315

250 Volts 300 Volts Surge Not Solvent Proof	10	MVH250VC10RMK16TP	12.5 x 16	K16	33.16	110
	22	MVH250VD22RML22TR	16 x 21.5	L22	15.07	205
	22	MVH250VD22RMM17TR	18 x 16.5	M17	15.07	200
	33	MVH250VD33RMM22TR	18 x 21.5	M22	10.05	260

400 Volts 450 Volts Surge Not Solvent Proof	4.7	MVH400VC4R7MK14TP	12.5 x 13.5	K14	84.66	70
	6.8	MVH400VD6R8ML17TR	16 x 16.5	L17	58.51	100
	10	MVH400VD10RML22TR	16 x 21.5	L22	39.79	140
	10	MVH400VD10RMM17TR	18 x 16.5	M17	39.79	135

450 Volts 500 Volts Surge Not Solvent Proof	3.3	MVH450VC3R3MK16TP	12.5 x 16	K16	120.57	65
	4.7	MVH450VD4R7ML17TR	16 x 16.5	L17	84.66	85
	10	MVH450VD10RMM22TR	18 x 21.5	M22	39.79	145

*Refer to diagrams for detailed case size dimensions.