



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




1E713131
(ON 01MVAR0) 台景図

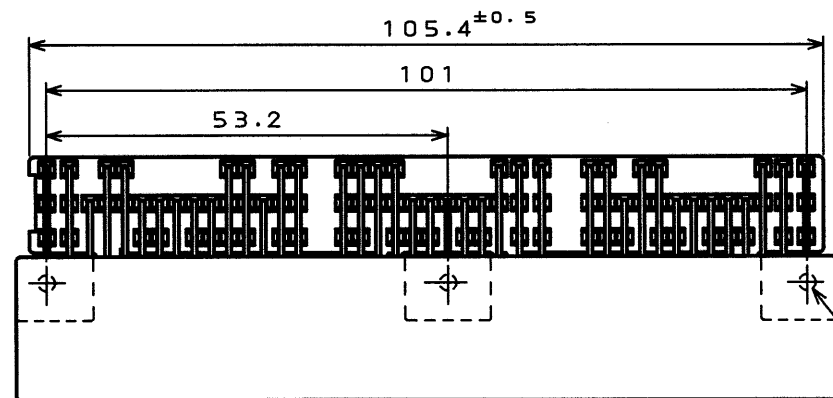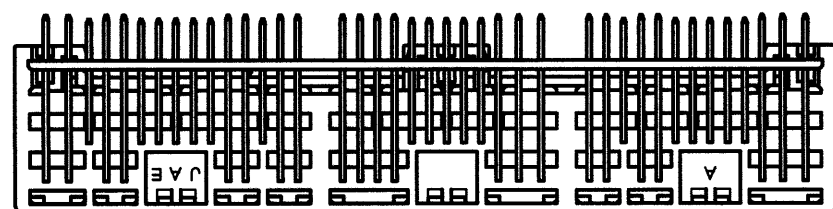

35 PIN BLOCK
POWER : 6 PIN
SIGNAL : 29 PIN
35芯ブロック
POWER : 6芯
SIGNAL : 29芯

28 PIN BLOCK
POWER : 6 PIN
SIGNAL : 22 PIN
28芯ブロック
POWER : 6芯
SIGNAL : 22芯

30 PIN BLOCK
POWER : 6 PIN
SIGNAL : 24 PIN
30芯ブロック
POWER : 6芯
SIGNAL : 24芯

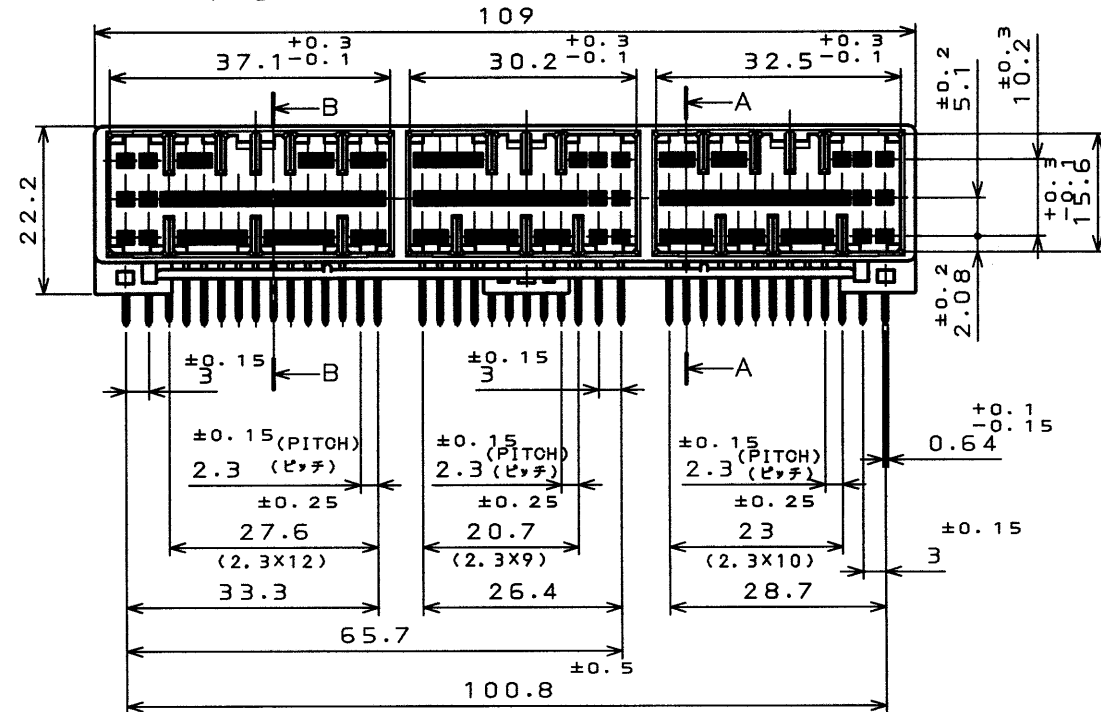


NOTE 1. RECOMMENDED ATTACHMENT SCREW: JIS B 1115, 1122 OR 1123
M3X6 LENGTH TAPPING SCREW : GRADE 2 OR 4.

NOTE 2. THE SHEARED EDGE OF PIN CONTACTS ARE NOT PLATED.

注1. 推奨取り付けネジ: JIS B 1115, 1122 又は 1123
M3X6 タッピンネジ 2種又は4種。

注2. ピンコンタクトの破断面には、めっきは付かない。

版数 REV.	年月日 DATE	CON NO.	変更内容 DESCRIPTION	製図 DR.	担当 CHK.	査閲 APPD.	承認 APPD.
2	20.Dec.2002	51189	JAPANESE → BILINGUAL	T.ENOMOTO	S.MAJIMA	T. Ichimura	Y. Kume

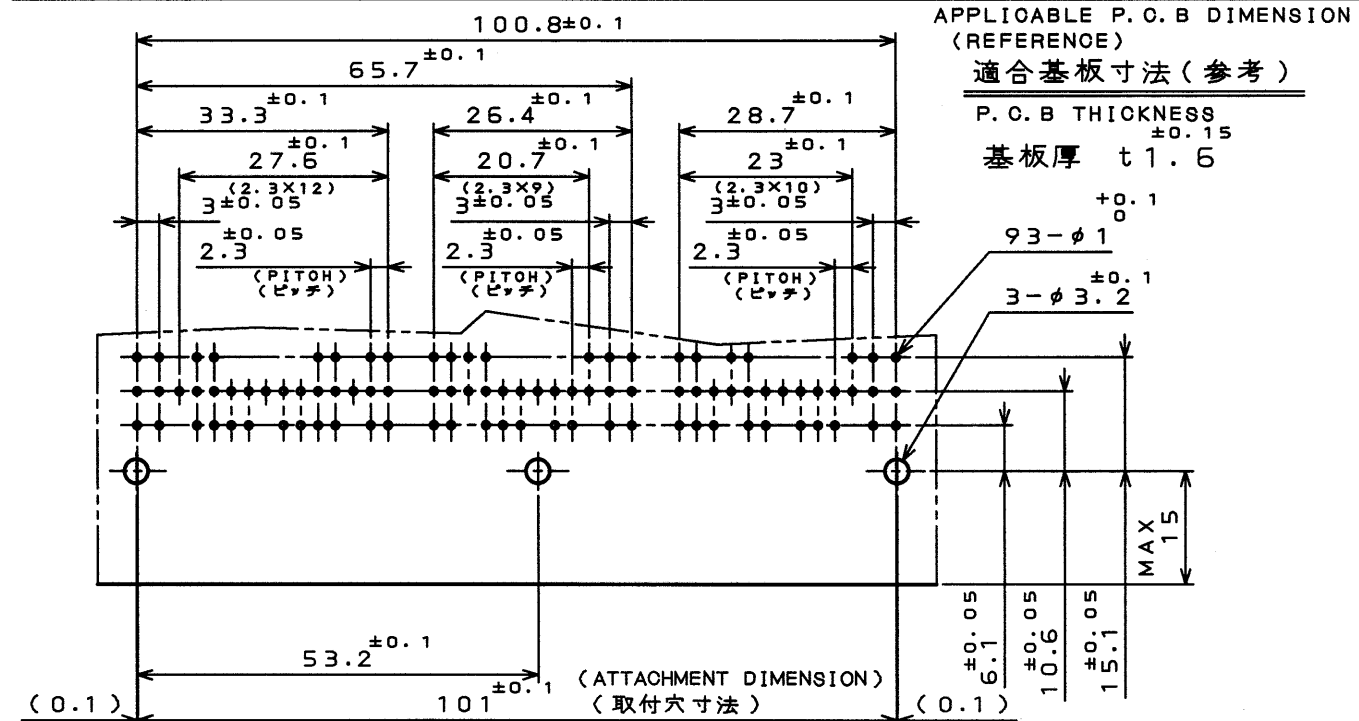

APPLICABLE P. O. B DIMENSION
(REFERENCE)


適合基板寸法 (参考)

P. C. B THICKNESS


基板厚 t1.6

MAX 15

SECT A-A

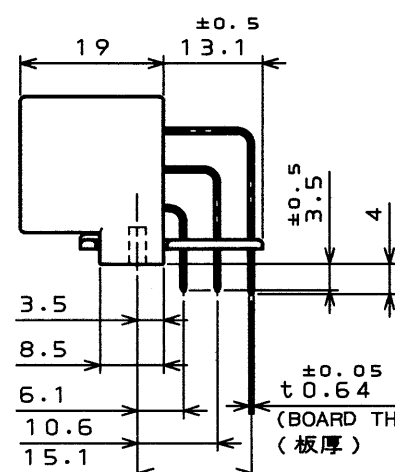

SECT B-B



5	LOCATOR	1	GLASS FILLED PBT		COLOR: DARK GRAY
4	PIN CONTACT 3	31	HIGH CONDUCTIVITY COPPER ALLOY	TIN PLATING	
3	PIN CONTACT 2	40	HIGH CONDUCTIVITY COPPER ALLOY	TIN PLATING	
2	PIN CONTACT 1	22	HIGH CONDUCTIVITY COPPER ALLOY	TIN PLATING	
1	PIN INSULATOR	1	GLASS FILLED PBT		COLOR: DARK GRAY
符号 NO.	名称 DESCRIPTION	個数 QTY.	材料 MATERIAL	仕上 FINISH	備考 REMARKS
仕様書 (SPECIFICATION)	JACS-1440 JABL-1440	第1版 (ORIGINAL DATE)	1.Nov.1996	尺 (SCALE)	2:1
製造 DR.		製造 CHK.	T.KUME	名称 (TITLE)	MX7-93PL
公差 (GENERAL TOLERANCE)		査閲 APPD.	Y. ICHIMURA	重量 (WEIGHT)	
寸法 (DIMENSION)	角度 (ANGLES)	承認 APPD.	K. TAKEGAWA		
. ±0.5	X° ±				
.X ±0.3	X°X' ±				
.XX ±					
.XXX ±					

本図面は日本航空電子工業(株)の所有する情報を含むもので当社の許可なく複製を禁止する。
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO JAE AND CAN NOT BE REPRODUCED WITHOUT WRITTEN CONSENT OF JAE.

DOF-0-212D(98.02)

QDS-96-110-50736

A3

SIZE

版数
(REV.)