



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





5,000 Watt Transient Voltage Suppressor (TVS) Protection Device

**HALOGEN
FREE**

DESCRIPTION

This RoHS compliant transient voltage suppressor series 5KP5.0e3 - 5KP250CAe3 provides a range of standoff voltage options from 5.0 to 250V in both unidirectional and bidirectional options. Clamping action is almost instantaneous. As a result, they provide effective protection from ESD and EFT per IEC61000-4-2 and IEC61000-4-4, as well as transients caused by inductive switching and RFI. They also protect from secondary lightning effects per 61000-4-5 at the class levels specified below.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Available in both unidirectional and bidirectional configurations
- Moisture classification is level 1 with no dry pack required per IPC/JEDEC J-STD-020B
- RoHS compliant

APPLICATIONS / BENEFITS

- Selections for 5.0 to 250 volts stand-off voltage (V_{WM})
- Economical TVS series for thru-hole mounting
- Pico- to nano-second response time
- Protection from transients caused by inductive switching and RFI
- Compliant to IEC 61000-4-2 and IEC 61000-4-4 for ESD and EFT protection respectively
- Secondary lightning protection per IEC61000-4-5 with 42 ohms source impedance:
 - Class 1, 2, 3, 4: 5KP5.0 to 5KP110CA
 - Class 5: 5KP5.0 to 5KP110CA (short distance)
 - Class 5: 5KP5.0 to 5KP36CA (long distance)
- Secondary lightning protection per IEC61000-4-5 with 12 ohms source impedance:
 - Class 1 & 2: 5KP5.0 to 5KP110CA
 - Class 3: 5KP5.0 to 5KP78CA
 - Class 4: 5KP5.0 to 5KP40CA
- Secondary lightning protection per IEC61000-4-5 with 2 ohms source impedance:
 - Class 2: 5KP5.0 to 5KP70CA
 - Class 3: 5KP5.0 to 5KP36CA
 - Class 4: 5KP5.0 to 5KP18CA



P600 Package

Also available in:


**Case 5A (DO-204AR)
package**

(hirel plastic axial-leaded)

 [M5KP5.0A – M5KP110CA](#)

DO-13 package

(metal axial-leaded)

 [LC6.5A – LC170A](#)

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com


MAXIMUM RATINGS @ 25 °C unless otherwise noted

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T _J and T _{STG}	-55 to +175	°C
Thermal Resistance, Junction to Lead @ 0.375 inch (9.5 mm) lead length from body	R _{θJL}	8.0	°C/W
Thermal Resistance, Junction to Ambient	R _{θJA}	40	°C/W
Peak Pulse Power Dissipation 10/1000 μs	P _{PP}	5000	W
Rated Average Power Dissipation @ T _L = 75 °C 0.375 inch (9.5 mm) from body ⁽¹⁾	P _{M(AV)}	8.0	W
Surge Peak Forward Current ⁽²⁾	I _{FSM}	500	A
Solder Temperature @ 10 s		260	°C

- Notes:**
- When mounted as shown in [Figure 5](#)
 - Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum

MECHANICAL and PACKAGING

- CASE: Void-free transfer molded thermosetting epoxy body meeting UL94V-0
- TERMINALS: RoHS compliant annealed matte-tin plating. Solderable per MIL-STD-750, method 2026.
- MARKING: Manufacturer, date code, part number, polarity and tolerance suffixes
- POLARITY: For unidirectional types the color band denotes the cathode, which is positive with respect to the anode under normal TVS operation.
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number). Consult factory for quantities.
- WEIGHT: Approximately 2.1 grams
- See [Package Dimensions](#) on last page.

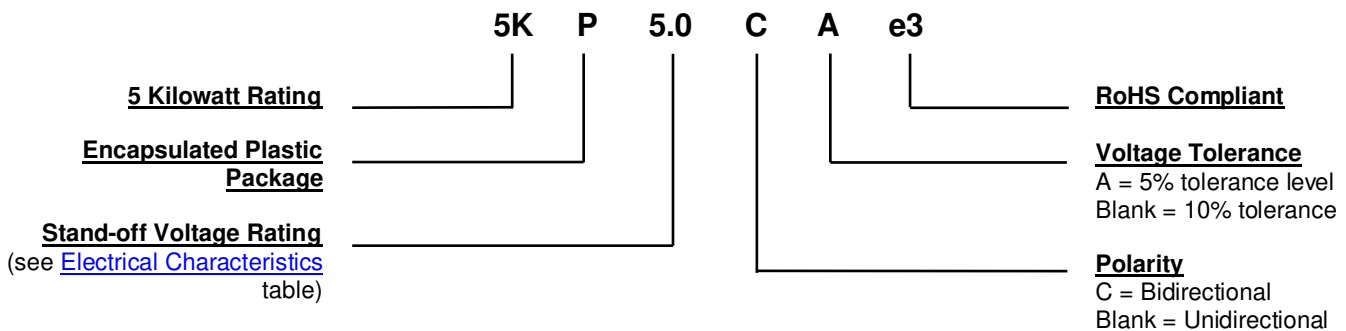PART NOMENCLATURE


SYMBOLS & DEFINITIONS

Symbol	Definition
$\alpha_{V(BR)}$	Temperature Coefficient of Breakdown Voltage: The change in breakdown voltage divided by the change in temperature that caused it expressed in %/°C or mV/°C.
I_D	Standby Current: The current through the device at rated stand-off voltage.
I_{PP}	Peak Impulse Current: The maximum rated random recurring peak impulse current or nonrepetitive peak impulse current that may be applied to a device. A random recurring or nonrepetitive transient current is usually due to an external cause, and it is assumed that its effect will have completely disappeared before the next transient arrives.
P_{PP}	Peak Pulse Power. The rated random recurring peak impulse power or rated nonrepetitive peak impulse power. The impulse power is the maximum-rated value of the product of I_{PP} and V_C .
$V_{(BR)}$	Breakdown Voltage: The voltage across the device at a specified current $I_{(BR)}$ in the breakdown region.
V_C	Clamping Voltage: The voltage across the device in a region of low differential resistance during the application of an impulse current (I_{PP}) for a specified waveform.
V_{WM}	Working Standoff Voltage: The maximum-rated value of dc or repetitive peak positive cathode-to-anode voltage that may be continuously applied over the standard operating temperature.

ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise stated

DEVICE NUMBER	BREAKDOWN VOLTAGE ⁽¹⁾ $V_{(BR)}$ @ I_T		TEST CURRENT I_T	WORKING STAND-OFF VOLTAGE V_{WM}	MAXIMUM STANDBY CURRENT ⁽³⁾ I_D @ V_{WM}	MAXIMUM PEAK PULSE CURRENT ⁽²⁾ I_{PP}	MAXIMUM CLAMPING VOLTAGE V_C @ I_{PP}	MAXIMUM TEMPERATURE COEFFICIENT OF $V_{(BR)}$ $\alpha_{V(BR)}$
	Min	Max						
	Volts	mA						
5KP5.0e3 / 5KP5.0Ce3	6.40	7.30	50	5.0	5000	521	9.6	0.057
5KP5.0Ae3 / 5KP5.0CAe3	6.40	7.00	50	5.0	5000	543	9.2	0.057
5KP6.0e3 / 5KP6.0Ce3	6.67	8.15	50	6.0	5000	439	11.4	0.061
5KP6.0Ae3 / 5KP6.0CAe3	6.67	7.37	50	6.0	5000	485	10.3	0.061
5KP6.5e3 / 5KP6.5Ce3	7.22	8.82	50	6.5	2000	407	12.3	0.065
5KP6.5Ae3 / 5KP6.5CAe3	7.22	7.98	50	6.5	2000	446	11.2	0.065
5KP7.0e3 / 5KP7.0Ce3	7.78	9.51	50	7.0	1000	376	13.3	0.068
5KP7.0Ae3 / 5KP7.0CAe3	7.78	8.60	50	7.0	1000	417	12.0	0.068
5KP7.5e3 / 5KP7.5Ce3	8.33	10.2	5	7.5	250	350	14.3	0.073
5KP7.5Ae3 / 5KP7.5CAe3	8.33	9.21	5	7.5	250	388	12.9	0.073
5KP8.0e3 / 5KP8.0Ce3	8.89	10.9	5	8.0	150	333	15.0	0.075
5KP8.0Ae3 / 5KP8.0CAe3	8.89	9.83	5	8.0	150	368	13.6	0.075
5KP8.5e3 / 5KP8.5Ce3	9.44	11.5	5	8.5	50	314	15.9	0.078
5KP8.5Ae3 / 5KP8.5CAe3	9.44	10.4	5	8.5	50	347	14.4	0.078
5KP9.0e3 / 5KP9.0Ce3	10.0	12.2	5	9.0	20	296	16.9	0.081
5KP9.0Ae3 / 5KP9.0CAe3	10.0	11.1	5	9.0	20	325	15.4	0.081
5KP10e3 / 5KP10Ce3	11.1	13.6	5	10	15	266	18.8	0.084
5KP10Ae3 / 5KP10CAe3	11.1	12.3	5	10	15	294	17.0	0.084
5KP11e3 / 5KP11Ce3	12.2	14.9	5	11	10	249	20.1	0.086
5KP11Ae3 / 5KP11CAe3	12.2	13.5	5	11	10	275	18.2	0.086
5KP12e3 / 5KP12Ce3	13.3	16.3	5	12	5	227	22.0	0.088
5KP12Ae3 / 5KP12CAe3	13.3	14.7	5	12	5	251	19.9	0.088
5KP13e3 / 5KP13Ce3	14.4	17.6	5	13	2	210	23.8	0.090
5KP13Ae3 / 5KP13CAe3	14.4	15.9	5	13	2	233	21.5	0.090
5KP14e3 / 5KP14Ce3	15.6	19.1	5	14	2	194	25.8	0.092
5KP14Ae3 / 5KP14CAe3	15.6	17.2	5	14	2	216	23.2	0.092
5KP15e3 / 5KP15Ce3	16.7	20.4	5	15	2	186	26.9	0.094
5KP15Ae3 / 5KP15CAe3	16.7	18.5	5	15	2	205	24.4	0.094
5KP16e3 / 5KP16Ce3	17.8	21.8	5	16	2	174	28.8	0.096
5KP16Ae3 / 5KP16CAe3	17.8	19.7	5	16	2	192	26.0	0.096
5KP17e3 / 5KP17Ce3	18.9	23.1	5	17	2	164	30.5	0.097
5KP17Ae3 / 5KP17CAe3	18.9	20.9	5	17	2	181	27.6	0.097
5KP18e3 / 5KP18Ce3	20.0	24.4	5	18	2	155	32.2	0.098
5KP18Ae3 / 5KP18CAe3	20.0	22.1	5	18	2	171	29.2	0.098
5KP20e3 / 5KP20Ce3	22.2	27.1	5	20	2	140	35.8	0.099
5KP20Ae3 / 5KP20CAe3	22.2	24.5	5	20	2	154	32.4	0.099
5KP22e3 / 5KP22Ce3	24.4	29.8	5	22	2	127	39.4	0.100
5KP22Ae3 / 5KP22CAe3	24.4	26.9	5	22	2	141	35.5	0.100
5KP24e3 / 5KP24Ce3	26.7	32.6	5	24	2	116	43.0	0.101
5KP24Ae3 / 5KP24CAe3	26.7	29.5	5	24	2	129	38.9	0.101

Continued on next page

ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise stated (continued)

DEVICE NUMBER	BREAKDOWN VOLTAGE ⁽¹⁾ V _(BR) @ I _T		TEST CURRENT I _T	STAND-OFF VOLTAGE V _{WM}	MAXIMUM STANDBY CURRENT ⁽³⁾ I _D @ V _{WM}	MAXIMUM PEAK PULSE CURRENT ⁽²⁾ I _{PP}	MAXIMUM CLAMPING VOLTAGE V _C @ I _{PP}	MAXIMUM TEMPERATURE COEFFICIENT OF V _(BR) α _{V(BR)}
	Min	Max						
	Volts	mA						
5KP26e3 / 5KP26Ce3	28.9	35.3	5	26	2	107	46.6	0.101
5KP26Ae3 / 5KP26CAe3	28.9	31.9	5	26	2	119	42.1	0.101
5KP28e3 / 5KP28Ce3	31.1	38.0	5	28	2	100	50.0	0.102
5KP28Ae3 / 5KP28CAe3	31.1	34.4	5	28	2	110	45.4	0.102
5KP30e3 / 5KP30Ce3	33.3	40.7	5	30	2	93.5	53.5	0.103
5KP30Ae3 / 5KP30CAe3	33.3	36.8	5	30	2	103	48.4	0.103
5KP33e3 / 5KP33Ce3	36.7	44.9	5	33	2	84.7	59.0	0.104
5KP33Ae3 / 5KP33CAe3	36.7	40.6	5	33	2	93.8	53.3	0.104
5KP36e3 / 5KP36Ce3	40.0	48.9	5	36	2	77.8	64.3	0.104
5KP36Ae3 / 5KP36CAe3	40.0	44.2	5	36	2	86.1	58.1	0.104
5KP40e3 / 5KP40Ce3	44.4	54.3	5	40	2	70.0	71.4	0.105
5KP40Ae3 / 5KP40CAe3	44.4	49.1	5	40	2	77.5	64.5	0.105
5KP43e3 / 5KP43Ce3	47.8	58.4	5	43	2	65.2	76.7	0.105
5KP43Ae3 / 5KP43CAe3	47.8	52.8	5	43	2	72.0	69.4	0.105
5KP45e3 / 5KP45Ce3	50.0	61.1	5	45	2	62.3	80.3	0.106
5KP45Ae3 / 5KP45CAe3	50.0	55.3	5	45	2	68.8	72.7	0.106
5KP48e3 / 5KP48Ce3	53.3	65.2	5	48	2	58.5	85.5	0.106
5KP48Ae3 / 5KP48CAe3	53.3	58.9	5	48	2	64.6	77.4	0.106
5KP51e3 / 5KP51Ce3	56.7	69.3	5	51	2	54.9	91.1	0.107
5KP51Ae3 / 5KP51CAe3	56.7	62.7	5	51	2	60.7	82.4	0.107
5KP54e3 / 5KP54Ce3	60.0	73.3	5	54	2	51.9	96.3	0.107
5KP54Ae3 / 5KP54CAe3	60.0	66.3	5	54	2	57.4	87.1	0.107
5KP58e3 / 5KP58Ce3	64.4	78.7	5	58	2	48.5	103	0.107
5KP58Ae3 / 5KP58CAe3	64.4	71.2	5	58	2	53.4	94	0.107
5KP60e3 / 5KP60Ce3	66.7	81.5	5	60	2	46.7	107	0.108
5KP60Ae3 / 5KP60CAe3	66.7	73.7	5	60	2	51.7	97	0.108
5KP64e3 / 5KP64Ce3	71.1	86.9	5	64	2	43.9	114	0.108
5KP64Ae3 / 5KP64CAe3	71.1	78.6	5	64	2	48.5	103	0.108
5KP70e3 / 5KP70Ce3	77.8	95.1	5	70	2	40.0	125	0.108
5KP70Ae3 / 5KP70CAe3	77.8	86.0	5	70	2	44.2	113	0.108
5KP75e3 / 5KP75Ce3	83.3	102	5	75	2	37.3	134	0.108
5KP75Ae3 / 5KP75CAe3	83.3	92.1	5	75	2	41.3	121	0.108
5KP78e3 / 5KP78Ce3	86.7	106	5	78	2	36.0	139	0.108
5KP78Ae3 / 5KP78CAe3	86.7	95.8	5	78	2	39.7	126	0.108
5KP85e3 / 5KP85Ce3	94.4	115	5	85	2	33.1	151	0.108
5KP85Ae3 / 5KP85CAe3	94.4	104	5	85	2	36.5	137	0.108
5KP90e3 / 5KP90Ce3	100	122	5	90	2	31.3	160	0.110
5KP90Ae3 / 5KP90CAe3	100	111	5	90	2	34.2	146	0.110
5KP100e3 / 5KP100Ce3	111	136	5	100	2	27.9	179	0.110
5KP100Ae3 / 5KP100CAe3	111	123	5	100	2	30.9	162	0.110

Continued on next page

ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise stated (continued)

DEVICE NUMBER	BREAKDOWN VOLTAGE ⁽¹⁾ $V_{(BR)}$ @ I_T		TEST CURRENT I_T	STAND-OFF VOLTAGE V_{WM}	MAXIMUM STANDBY CURRENT ⁽³⁾ I_D @ V_{WM}	MAXIMUM PEAK PULSE CURRENT ⁽²⁾ I_{PP}	MAXIMUM CLAMPING VOLTAGE V_C @ I_{PP}	MAXIMUM TEMPERATURE COEFFICIENT OF $V_{(BR)}$ $\alpha_{V(BR)}$
	Min	Max						
	Volts	mA						
5KP110e3 / 5KP110Ce3	122	149	5	110	2	25.5	196	0.110
5KP110Ae3 / 5KP110CAe3	122	135	5	110	2	28.2	177	0.110
5KP120e3 / 5KP120Ce3	133	162	5	120	2	23.5	213	0.110
5KP120Ae3 / 5KP120CAe3	133	147	5	120	2	26.4	193	0.110
5KP130e3 / 5KP130Ce3	144	175	5	130	2	21.6	231	0.110
5KP130Ae3 / 5KP130CAe3	144	159	5	130	2	24.4	209	0.110
5KP150e3 / 5KP150Ce3	167	204	5	150	2	18.7	268	0.110
5KP150Ae3 / 5KP150CAe3	167	185	5	150	2	21.0	243	0.110
5KP160e3 / 5KP160Ce3	178	217	5	160	2	17.4	287	0.110
5KP160Ae3 / 5KP160CAe3	178	197	5	160	2	19.7	259	0.110
5KP170e3 / 5KP170Ce3	189	231	5	170	2	16.4	304	0.110
5KP170Ae3 / 5KP170CAe3	189	209	5	170	2	18.5	275	0.110
5KP180e3 / 5KP180Ce3	200	244	5	180	2	15.5	323	0.110
5KP180Ae3 / 5KP180CAe3	200	221	5	180	2	17.5	292	0.110
5KP190e3 / 5KP190Ce3	211	258	5	190	2	14.6	343	0.110
5KP190Ae3 / 5KP190CAe3	211	233	5	190	2	16.5	310	0.110
5KP200e3 / 5KP200Ce3	222	271	5	200	2	13.7	364	0.110
5KP200Ae3 / 5KP200CAe3	222	246	5	200	2	15.5	329	0.110
5KP210e3 / 5KP210Ce3	233	284	5	210	2	12.9	386	0.110
5KP210Ae3 / 5KP210CAe3	233	258	5	210	2	14.6	349	0.110
5KP220e3 / 5KP220Ce3	244	298	5	220	2	12.2	410	0.110
5KP220Ae3 / 5KP220CAe3	244	270	5	220	2	13.7	371	0.110
5KP250e3 / 5KP250Ce3	277	338	5	250	2	10.6	470	0.110
5KP250Ae3 / 5KP250CAe3	277	306	5	250	2	12.0	425	0.110

NOTES:

- (1) $V_{(BR)}$ measured after I_T applied for 300 μ s, I_T = square wave pulse or equivalent
- (2) Surge current waveform per [Figure 3](#) and derated per [Figure 2](#)
- (3) For bidirectional types with V_{WM} of 30 volts and less, the I_D limit is doubled

GRAPHS

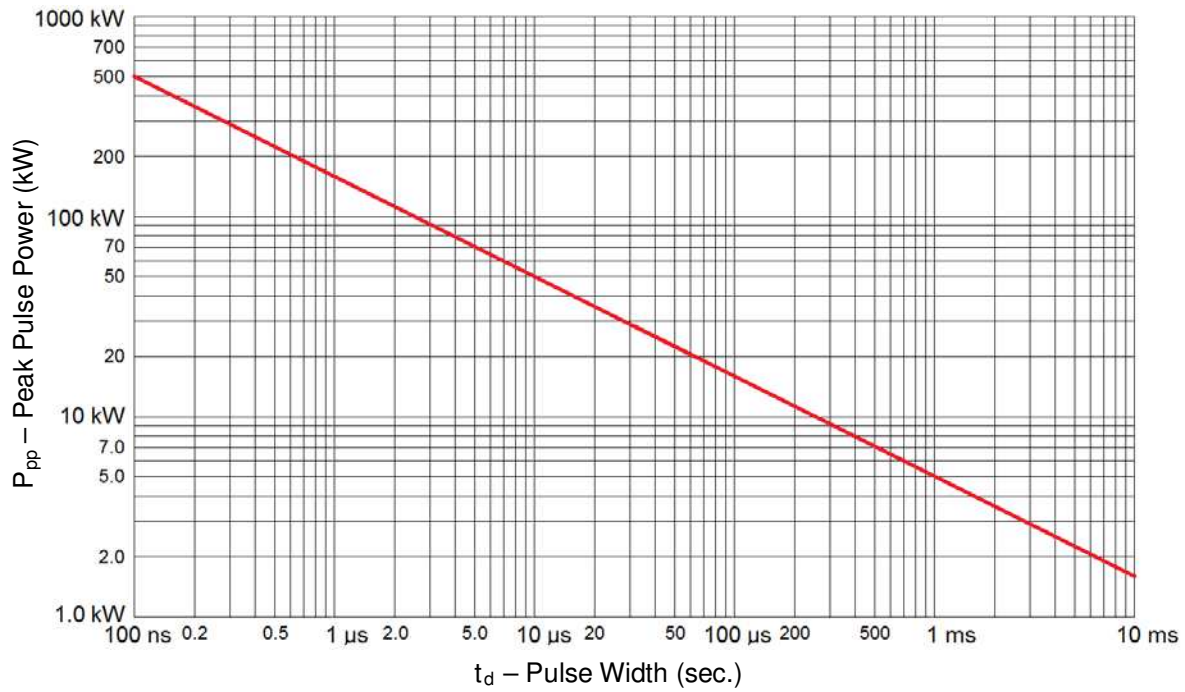


FIGURE 1
Peak Pulse Power Rating Curve


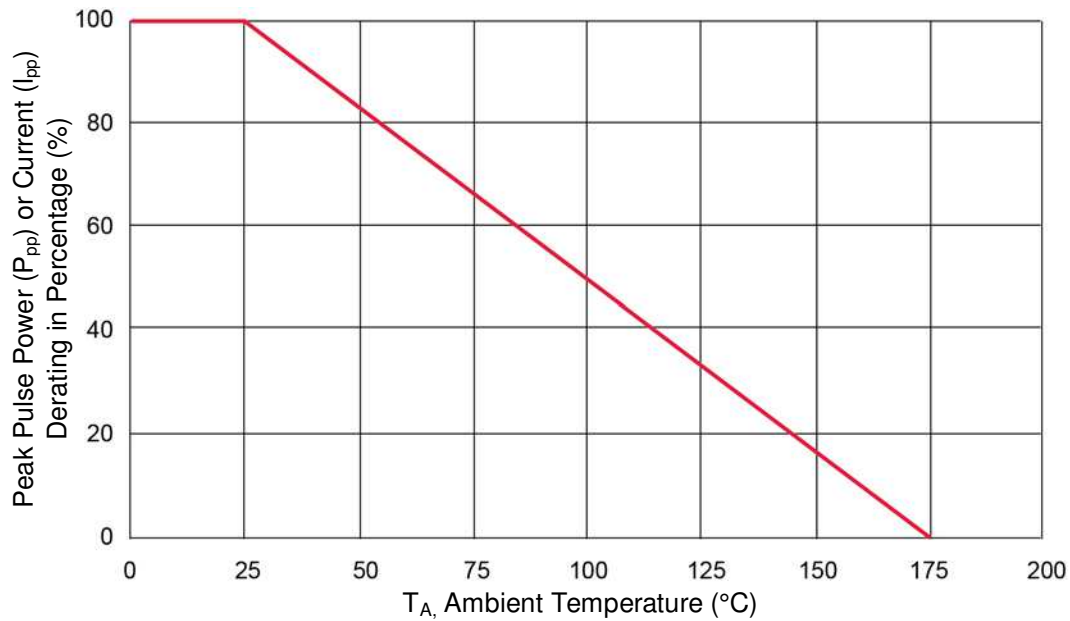


FIGURE 2
Pulse Derating Curve

GRAPHS (continued)

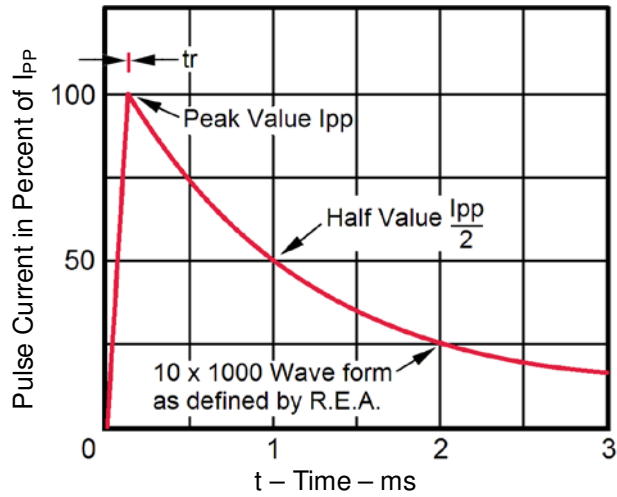

Test waveform parameters: $t_r=10 \mu s$, $t_p=1000 \mu s$

FIGURE 3
Pulse Waveform for 10/1000 μs Exponential Surge

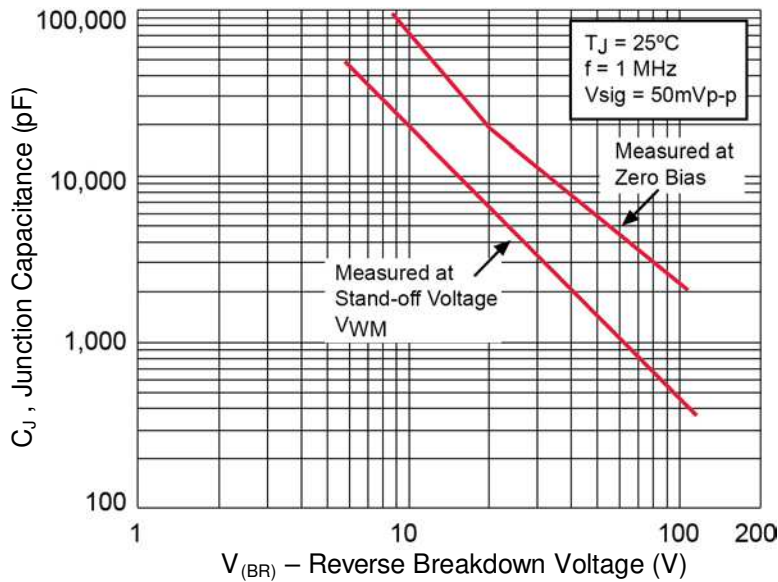


FIGURE 4
Typical Junction Capacitance

GRAPHS (continued)

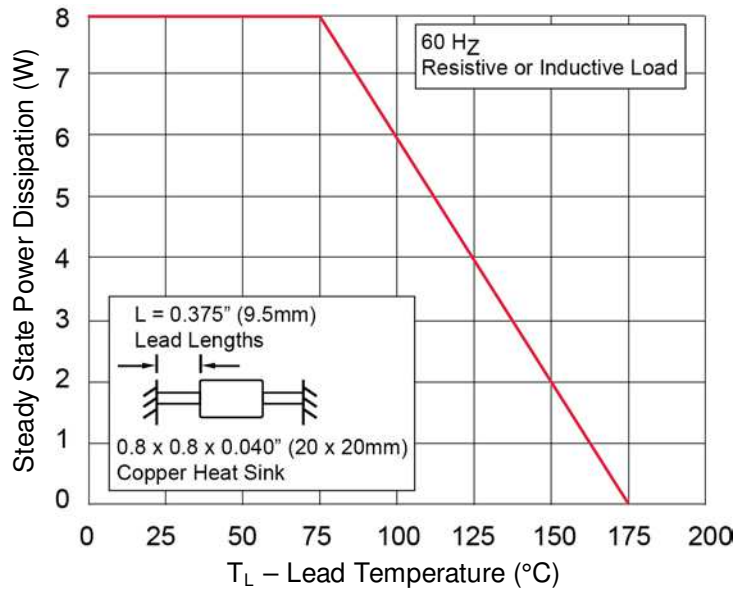


FIGURE 5
Steady State Power Derating Curve

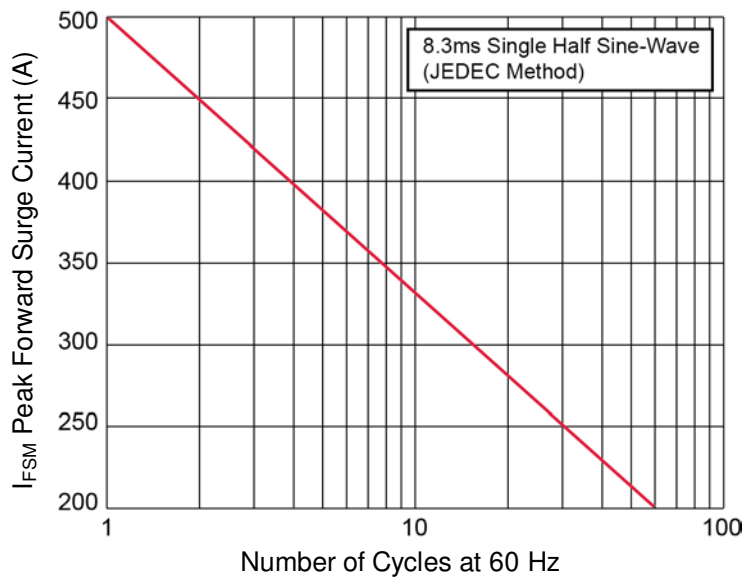
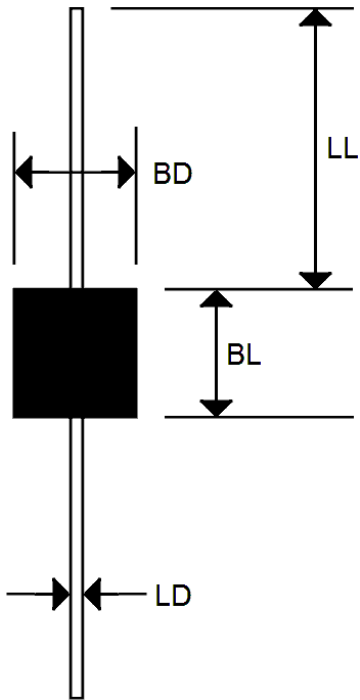


FIGURE 6
Maximum Non-repetitive Forward Surge Current

PACKAGE DIMENSIONS


Dim	Dimensions			
	Inch		Millimeters	
	Min	Max	Min	Max
LL	0.750	-	19.05	-
BL	0.340	0.360	8.645	9.135
BD	0.340	0.360	8.645	9.135
LD	0.047	0.053	1.194	1.346