imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PANDUIT[®] IDENTIFICATION SOLUTIONS


Dot Matrix Labels

Non-Laminated Labels



- High quality, economical solution for wire/cable labeling
- Use as a wrap around label or flag style marker for wire/cable labeling
- Available in vinyl cloth material and supplied on 9 pin fed sheets
- PANDUIT labeling software packages include all label formats for quick and easy label production

Part Number System for Non-Laminated Labels

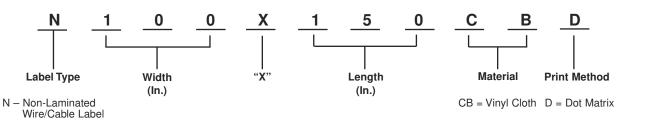

Material/Print Method Selection Guide

Material	Print Method	Temperature Range	Features				
Vinyl Cloth, White (CB) •	Dot Matrix (D)	-50°F to 170°F (-46°C to 77°C)	Indoor/outdoor rated; thin conformable material with repositionable adhesive allows label to be removed and reused or used in temporary applications; provides durability, high temperature resistance and dimensional stability for rough or textured surface				

•UL Recognized.

System Overview

Labeling Solutions by Application

Labels by Print Method

Labeling Software

Printers

Pre-Printed and Write-On Markers

Lockout / Tagout

> Safety and Facility ID

Generic Order Forms

Standards

CANDUIT® IDENTIFICATION SOLUTIONS

System Overview

Dot Matrix Labels

Non-Laminated Labels

Labeling Solutions by Applica

> Lal ł Pr Me

Lab Soft

Part Number	Part Description	Width		Length		Min. Cable O.D.		Max. Cable O.D.		Std. Pkg.	Std. Ctn.
		In.	mm	In.	mm	In.	mm	In.	mm	Qty.	Qty.
N025X075CBD	White, vinyl cloth label	.25	6.35	.75	19.05	.24	6.10	.51	12.95	5000	20000
N025X125CBD	White, vinyl cloth label	.25	6.35	1.25	31.75	.40	10.16	.85	21.59	5000	20000
N025X150CBD	White, vinyl cloth label	.25	6.35	1.50	38.10	.48	12.19	1.02	25.91	5000	20000
N025X175CBD	White, vinyl cloth label	.25	6.35	1.75	44.45	.56	14.22	1.19	30.23	5000	20000
N050X075CBD	White, vinyl cloth label	.50	12.70	.75	19.05	.24	6.10	.51	12.95	5000	15000
N050X125CBD	White, vinyl cloth label	.50	12.70	1.25	31.75	.40	10.16	.85	21.59	5000	20000
N050X150CBD	White, vinyl cloth label	.50	12.70	1.50	38.10	.48	12.19	1.02	25.91	5000	10000
N050X175CBD	White, vinyl cloth label	.50	12.70	1.75	44.45	.56	14.22	1.19	30.23	5000	1000
N100X075CBD	White, vinyl cloth label	1.00	25.40	.75	19.05	.24	6.10	.51	12.95	5000	20000
N100X125CBD	White, vinyl cloth label	1.00	25.40	1.25	31.75	.40	10.16	.85	21.59	5000	2000
N100X150CBD	White, vinyl cloth label	1.00	25.40	1.50	38.10	.48	12.19	1.02	25.91	5000	1500
N100X175CBD	White, vinyl cloth label	1.00	25.40	1.75	44.45	.56	14.22	1.19	30.23	5000	1500

Width

mm

6.35

6.35

12.70

12.70

25.40

25.40

In.

.25

.25

.50

.50

1.00

1.00

Printers

Order number of labels required in multiples of Std. Pkg. Qty.

White, vinyl cloth label

Order number of labels required in multiples of Std. Pkg. Qty.

Part Description

Flag Style Labels

Part Number

N025X150CBD

N025X175CBD

N050X150CBD

N050X175CBD

N100X150CBD

N100X175CBD

Pre-Printed and Write-On Markers

Lockout /

Tagout

Safety

and Facility ID


> Generic Order

Forms

Standards

Technical Reference/ Index

C24





Std.

Pkg. Qty.

5000

5000

5000

5000

5000

5000

Std.

Ctn.

Qty.

20000

20000

10000

10000

15000

15000



Max. Cable

O.D.

mm

25.91

30.23

25.91

30.23

25.91

30.23

In.

1.02

1.19

1.02

1.19

1.02

1.19

Min. Cable

O.D.

mm

12.19

14.22

12.19

14.22

12.19

14.22

In.

.48

.56

.48

.56

.48

.56

Length

mm

38.10

44.45

38.10

44.45

38.10

44.45

In.

1.50

1.75

1.50

1.75

1.50

1.75

