



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

T1 Shielded RJ48C Cross-over Cable (RJ45 M/M), 10-ft., TAA

MODEL NUMBER: **N266-010**

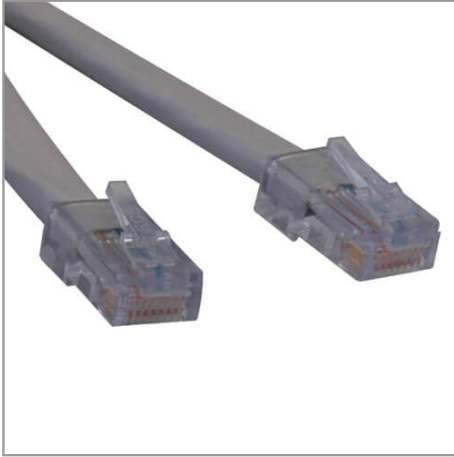

Highlights

- 22AWG, 100ohm T1 Rated Cross-over Cable
- Connects your T1 CSU/DSU
- Meets ANSI T1.403 Cabling Requirement
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

Package Includes

10ft T1 Cross-over Shielded RJ48C Patch Cable

Description

Tripp Lite's T1, RJ45-RJ45 , (RJ48C) Cross-over Patch Cables are constructed with premium Quabbin 9720, T1 certified cable. Two individually shielded, 22AWG, 100ohm pairs, maximize the performance of your expensive T1 circuits and equipment. Beware of generic T1 patch cables made with inexpensive Cat5 unshielded patch cable. The American National Standards Institute (ANSI) states in ANSI T1.403 that T1 cable be constructed of two balanced pairs, 22 AWG Solid conductor, 100ohm impedance, with a loss budget of 5.5db. Cross-over wiring configuration available in 3ft, 5ft, 7ft, and 10ft lengths. Custom lengths available...consult your reseller. Also available in Straight-through wiring configuration...see Tripp Lite N265- Series T1 patch cables.

Features

- ANSI certified T1 cable, Levels 1, 1A, and 1C
- Complies with ANSI T1.403 Carrier-to-Customer Installation-DS1 Metallic Interface
- Cross-over T1 wiring configuration
- Available in 3ft, 5ft, 7ft, and 10ft stocked lengths
- Custom length cables available
- NEC (UL) Type CMR
- Available also in Straight-through wiring configurations
- 22AWG Solid Tinned Copper

Specifications

OVERVIEW

UPC Code	037332150370
----------	--------------



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Technology	T1
INPUT	
Cable Length (ft.)	10
Cable Length (m)	3.1
PHYSICAL	
Shipping Dimensions (hwd / in.)	12.000 x 10.000 x 0.500
Shipping Dimensions (hwd / cm)	30.48 x 25.40 x 1.27
Shipping Weight (lbs.)	0.3400
Shipping Weight (kg)	0.15
Color	Beige
CONNECTIONS	
Side A - Connector 1	RJ45 (MALE)
Side B - Connector 1	RJ45 (MALE)
WARRANTY	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>