



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Duplex Multimode 62.5/125 Fiber Patch Cable (ST/ST), 30M (100-ft.)

MODEL NUMBER: N302-30M

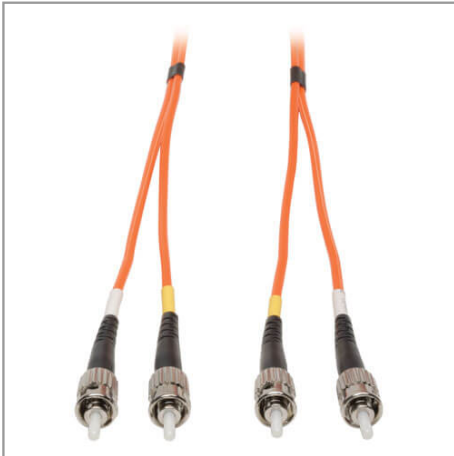

Highlights

- Premium PVC 62.5/125µm multimode patch cables
- Attenuation loss meets or exceeds the latest industry standards

System Requirements

- Any fiber optic hardware or NIC card requiring multimode duplex cable with ST/ST connectors

Package Includes

- 30 meter (100ft) Duplex MMF Cable ST/ST 62.5/125 Fiber

Description

Tripp Lite's 30 meter (100ft) multimode duplex fiber optic ST/ST patch cable is manufactured from 62.5/125 zipcord fiber. The cable has ST connectors on each end, a PVC jacket and is FDDI and OFNR rated. Duplex multimode fiber is most commonly used in LAN applications.

Features

- Manufactured from 62.5/125 duplex (zipcord) fiber
- PVC jacket
- Length: 30 meter (100ft) connectors: 2 ST connectors on each end
- Insertion loss testing performed on every connector (0.2db typical) and provided with cable
- Beveled edge on ends of glass makes insertion of plug a breeze.
- Fiber made from glass (not a polymer)
- Color coded shrouds identify transmit and receive
- Fiber optic distributed data interface (FDDI) rated
- OFNR (riser rated)

Specifications

| OVERVIEW | |
|--------------|--------------------------|
| UPC Code | 037332135254 |
| Technology | Multimode(All versions) |
| Optical Mode | OM1 |
| INPUT | |



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

| | |
|-------------------------------------|---------------------------|
| Cable Length (ft.) | 98.4 |
| Cable Length (m) | 30 |
| PHYSICAL | |
| Shipping Dimensions (hwd / in.) | 1.000 x 5.400 x 6.200 |
| Shipping Dimensions (hwd / cm) | 2.54 x 13.72 x 15.75 |
| Shipping Weight (lbs.) | 0.5000 |
| Shipping Weight (kg) | 0.23 |
| Color | Orange |
| COMMUNICATIONS | |
| Network Speed | 1Gbps |
| CONNECTIONS | |
| Side A - Connector 1 | ST DUPLEX (MALE) |
| Side B - Connector 1 | ST DUPLEX (MALE) |
| WARRANTY | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>