



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Duplex Singlemode 8.3/125 Fiber Patch Cable (LC to SC/APC), 2M (6-ft.)

MODEL NUMBER: N366-02M-AP

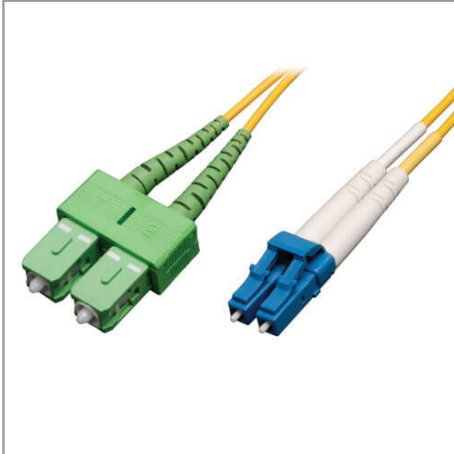

### Highlights

- LC to SC/APC (Angle Physical Contact), 2 Meter Fiber Patch cable
- Premium PVC 8.3/125 micron singlemode patch cables
- Attenuation loss meets or exceeds the latest industry standards
- Twice the bandwidth throughput of multimode cable

### Package Includes

- 2 Meter (6-ft.) Duplex SMF 8.3/125 Patch Cable, LC to SC/APC

### Description

Tripp Lite's 2-meter, single mode duplex fiber optic LC to SC/APC patch cable is manufactured from 8.3/125 zipcord fiber. The cable has SC Angle Physical Polish connectors on one end, LC connectors on the other, a PVC jacket, and is FDDI and OFNR rated. Duplex single mode fiber is most commonly used in LAN applications. The Angled connector face prevents light entering the fiber to bounce back into the laser, destabilizing it. Check your fiber transceivers user manual to see if an APC cable is warranted.

### Features

- LC to SC/APC (Angle Physical Contact), 2 Meter Fiber Patch cable
- Manufactured from 8.3/125 duplex (zipcord) fiber
- PVC jacket
- Length: 1-meter. Connectors: 2 SC (Green ) and 2 LC connectors on each end
- Insertion loss testing performed on every connector (0.2db typical) and provided with cable
- Beveled edge on ends of glass makes insertion of plug a breeze
- Fiber made from glass (not a polymer)
- Fiber optic distributed data interface (FDDI) rated
- OFNR (riser rated)

## Specifications

OVERVIEW	
UPC Code	037332150967
Clad Diameter	125
Core Diameter	8.3



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.triplite.com

Number of Fibers	2
Technology	Singlemode
Optical Mode	OS2
<b>INPUT</b>	
Cable Length (ft.)	6.6
Cable Length (m)	2
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	9.000 x 7.000 x 0.500
Shipping Dimensions (hwd / cm)	22.86 x 17.78 x 1.27
Shipping Weight (lbs.)	0.0600
Shipping Weight (kg)	0.03
Color	Yellow
<b>CONNECTIONS</b>	
Side A - Connector 1	LC DUPLEX (MALE)
Side B - Connector 1	SC DUPLEX (MALE)
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.triplite.com/products/product-certification-agencies>