



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Guaranteed compatibility when used with recommended Tripp Lite cabling. Designed specifically for use with Tripp Lite cables, such as the N842-, N844- and N845-Series cables.

## 40Gb Pass-Through Cassette - (x12) 12-Fiber MTP/MPO ( Female )

MODEL NUMBER: **N484-12M12**

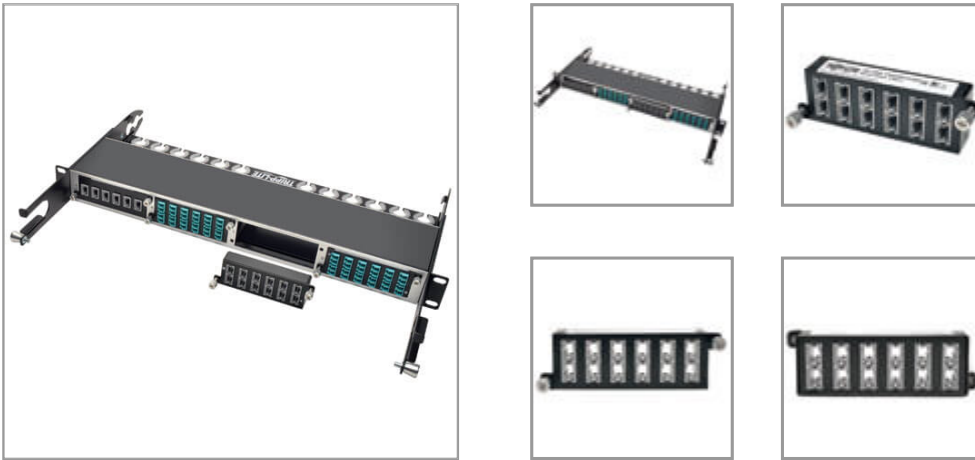

### Description

Tripp Lite's N484-12M12 is a High Density 40Gb Pass-through Cassette, with (x12) 12-Fiber MTP/MPO connections. Designed specifically for use with Tripp Lite's N484-00U and N484-01U chassis'; up to 4 cassettes per N484-01U, or 1 per N484-00U. Each MTP/MPO connector is rated for up to 40GbE, with an extremely low insertion loss of 0.35db, well under the IEEE-802.3ae maximum channel loss spec of <25db. Guaranteed compatibility when used with recommended Tripp Lite cabling. Designed specifically for use with Tripp Lite cables, such as the N842-, N844- and N845-Series cables. Installation is simple, with the cassette being easily installed or removed using screw tabs to lock or unlock it from the panel; no tools required. Furthermore, each cassette features factory terminated connectors that reduce the time and labor required of field connector terminations. Cassette housing made with heavy duty, 1.0mm Cold Rolled Steel.

### Features

- High Density Fiber Cassette for use with Tripp Lite's N484-00U and N484-01U chassis'
- 40Gb Pass-through Cassette, with (x12) 12-Fiber MTP/MPO connections
- Max insertion loss of 0.35dB falls well under the IEEE 802.3ae maximum channel loss spec of <25dB
- Guaranteed compatibility when used with recommended Tripp Lite cabling
- Designed specifically for use with Tripp Lite cables, such as the N842-, N844- and N845-Series cables
- Installation is simple, with the cassette being easily installed or removed using screw tabs to lock or unlock it from the panel; no tools required
- Factory terminated connectors reduce the time and labor required of field connector terminations
- Housing made of heavy duty, 1.0mm Cold Rolled Steel
- Includes dust caps for unused ports

### Highlights

- High Density Fiber Cassette for use with Tripp Lite's N484-00U and N484-01U chassis'
- 40Gb Pass-through Cassette, with (x12) 12-Fiber MTP/MPO connections ( Female )
- Guaranteed compatibility when used with recommended Tripp Lite cabling
- Designed specifically for use with Tripp Lite cables, such as the N842-, N844- and N845-Series cables
- Factory terminated connectors reduce the time and labor required of field connector terminations

### System Requirements

- Guaranteed compatibility when used with recommended Tripp Lite cabling
- Designed specifically for use with Tripp Lite cables, such as the N842-, N844- and N845-Series cables

### Package Includes

- N484-12M12 40GbE Pass-Through Cassette - (x12) 12-Fiber MTP/MPO ( Female )
- Quick Start Guide



## Specifications

<b>OVERVIEW</b>	
UPC Code	037332187215
Technology	MTP/MPO
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	2.360 x 7.900 x 1.460
Shipping Dimensions (hwd / cm)	5.99 x 20.07 x 3.71
Shipping Weight (lbs.)	0.4900
Shipping Weight (kg)	0.22
Unit Dimensions (hwd / in.)	1.4 x 4.4 x 0.8
Unit Weight (lbs.)	0.3
Unit Weight (kg)	0.14
Color	Black
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	-4 to 122 F (-20 to 50 C)
<b>CONNECTIONS</b>	
Ports	12
Side A - Connector 1	12-STRAND MTP (FEMALE)
Side B - Connector 1	12-STRAND MTP (FEMALE)
<b>CERTIFICATIONS</b>	
Approvals	RoHS, REACH
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	Lifetime limited warranty

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>