



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
H	-	B	ECR-15-010046	13JUL15	SW	RZ	

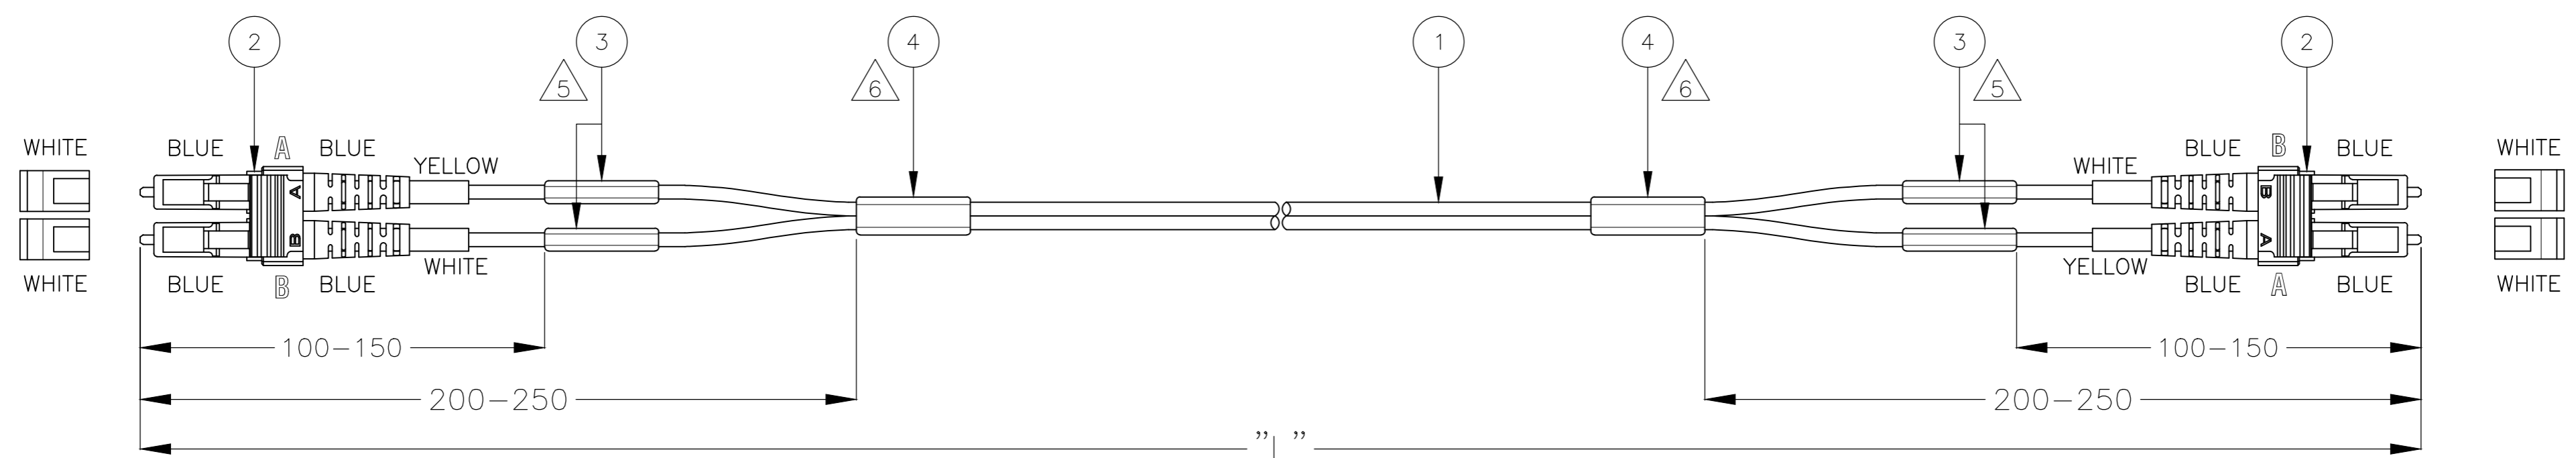


ASSEMBLY CONNECTIVITY	
LC CONN.	LC CONN.
YELLOW (A)	WHITE (B)
WHITE (B)	YELLOW (A)

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061531-Y	XY.0

NOTES:

- 1 ATTENUATION ≤ 0.3 dB, MEASURED AT 1310 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- 2 RETURN LOSS ≥ 45 dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 1310 nm
- 3 TUNED CONNECTORS
- 4 CABLE INFORMATION:
 - CORE DIAMETER: 9/125 μm (2x)
 - OUTER JACKET DIAMETER: 1.8 x 3.6 mm
 - OUTER JACKET COLOUR: YELLOW
 - OUTER JACKET MATERIAL: LSZH
- △5 INFORMATION ON LABEL, SEE DETAIL FOR EXAMPLE
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER & ORDER NUMBER
 - ATTENUATION AND RETURN LOSS AT 1310 nm
- △6 BLANK LABEL
 - * ONLY ONE LABEL IN THE MIDDLE OF THE CABLE IS USED FOR LENGTHS < 0.6 METER

EXAMPLE LABEL DETAIL:

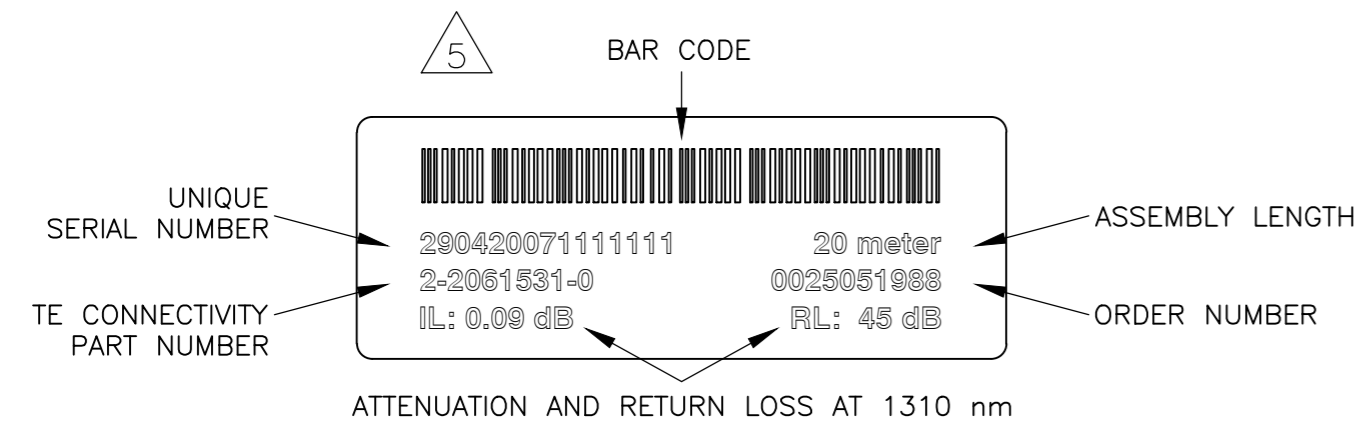

2	BLANK LABEL	4
4	INFORMATION LABEL	3
2	LC DUPLEX CONNECTOR, ULTRA SHORT, SINGLE MODE, BLUE	2
L	FOCAB 1.8MZ 9/125 G657A, YELLOW, LSZH	1
Qty	Description	Item
THIS DRAWING IS A CONTROLLED DOCUMENT.		
DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1.0 1 PLC ± 0.5 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -		DWN R. COOLEN 13APR2011 CHK R. GROENEVELD 01JUN2011 APVD A. HENGELMOLEN 01JUN2011 PRODUCT SPEC - APPLICATION SPEC - WEIGHT - CUSTOMER DRAWING
MATERIAL - FINISH -		NAME R. COOLEN NAME A. HENGELMOLEN SIZE A2 CAGE CODE 00779 DRAWING NO C-2061531 RESTRICTED TO - SCALE NTS SHEET 1 of 1 REV B
FIBER OPTIC LEAD 1.8MZ LC/DPX - LC/DPX ULTRA SHORT SINGLE MODE 9/125 G657A		