



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



10MHz *Low Noise/Low G-Sensitivity* OCXO NA-10M-6800 series

NA-10M-6800 Series in 25.4x25.4mm DIP package

NA-10M-6800 series is a 10.000 MHz high performance (VC)OCXO with low phase noise(LPN) and low G sensitivity(LGS). It has excellent temperature versus frequency stability with many available options. The part is housed in a hermetically sealed RoHS package which protects it from extreme changes in external humidity and pressure.



RoHS Compliant Standard

FEATURES

- **Low Phase Noise**
- Small Hermetically Sealed Package
- Tight Frequency Stability
- Low Power Consumption
- Fast Warm-up Time
- Electrical Frequency Tuning Input
- Reference Voltage Output
- RoHS-Compliant (lead-free)

APPLICATIONS

- Instrument Reference
- Microwave Communication
- Clock Reference for Microwave Signal Source
- Test & Measurement
- Telecom Systems
- Radar Systems

ELECTRICAL SPECIFICATIONS

Test conditions: VDC = +12 V; VCO = +5 V; at +25 ± 3°C unless otherwise identified

1. OUTPUT (PIN = "R.F. OUTPUT")

	Parameter	Min.	Typ.	Max.	Unit	Test Condition
1.1.	Frequency (Fo)	10.000000			MHz	
1.2.	Initial Accuracy	-0.1		+0.1	ppm	@ +25 ±1°C after turn on power 60 minutes Vco=+5V
1.3.	Waveform	Sine wave				
1.4.	Level	+8	+10	+12	dBm	
1.5.	Load	50			Ω	
1.6.	Harmonics				-30	dBc
1.7.	Spurious				-80	dBc
						10Hz to 1MHz from carrier

2. FREQUENCY STABILITY

	Parameter	Min.	Typ.	Max.	Unit	Test Condition	
2.1.	Ambient	±5, ±10, ±20, ±30, ±50, ±100			ppb	referenced to 25°C	Refer to Table 1 : Ordering Information
		-20°C ~ +70°C -40°C ~ +85°C			°C		
2.2.	Aging						
	Daily	-0.5		+0.5	ppb	after 30 days	
	Yearly	-50		+50	ppb		
	10 Years	-0.3		+0.3	ppm		
2.3.	Voltage	-1		+1	ppb	±5% change	
2.4.	Short term		0.002		ppb	root Allan variance for $\tau=1$ sec	
2.5.	Load	-1		+1	ppb	±5% change	
2.6.	Warm-up	-50		+50	ppb	in 5 minutes @ +25 ±1°C	referenced to 1 hour
2.7.	G-Sensitivity (each axis)			1	ppb/g	Option, Refer to Table 1 : Ordering Information	
2.8.	Phase Noise (Max.)	Option A	Option B	Option C		Refer to Table 1 : Ordering Information	
		-105	-110	-115	dBc/Hz	@ 1Hz	
		-135	-140	-142	dBc/Hz	@ 10Hz	
		-155	-155	-155	dBc/Hz	@ 100Hz	
		-165	-165	-165	dBc/Hz	@ 1KHz	
		-170	-170	-170	dBc/Hz	@ 10KHz	
		-170	-170	-170	dBc/Hz	@ 100KHz	
		-170	-170	-170	dBc/Hz	@ 1MHz	

3. ELECTRICAL FREQUENCY ADJUSTMENT (PIN = "VCO INPUT")

	Parameter	Min.	Typ.	Max.	Unit	Test Condition
3.1.	Tuning Range	±0.4*			ppm	Referenced to frequency at nominal Center Voltage
3.2.	Control Voltage	0.5		+9.5	V	
3.3.	Slope	Positive				
3.4.	Center Voltage		+5.0		V	
3.5.	Linearity	-10		+10	%	

* Sufficient to adjust the oscillator to nominal frequency for 10 years. Some unit will have ±0.7ppm tuning range.

4. INPUT POWER (PIN = "+VDC")

	Parameter	Min.	Typ.	Max.	Unit	Test Condition
4.1.	Voltage	+11.4	+12	+12.6	V	
4.2.	Current					
	Steady State			2.0	W	@ +25°C, operating -20°C ~ +70°C
				2.3		@ +25°C, operating -40°C ~ +85°C
	During Warm-Up			400	mA	@ +25°C, operating -20°C ~ +70°C
			500	@ +25°C, operating -40°C ~ +85°C		

Refer to Table 1 : Ordering Information

5. REFERENCE VOLTAGE (PIN = "REFERENCE VOLTAGE")

	Parameter	Min.	Typ.	Max.	Units	Test Condition
5.1.	Voltage	+9.25	+9.5	+9.75	V	
5.2.	Source Resistance			100	Ohm	
5.3.	Load Impedance	10			Kohm	

6. ENVIRONMENTAL


	Parameter	Reference Std.	Test Condition
6.1.	Operable Temperature	-45°C to +90°C	Note 1
6.2.	Storage Temperature	-50°C to +95°C	
6.3.	Humidity	MIL-STD-202, Method 103 Test Condition A	95% RH @ +40°C, non-condensing, 240 hours
6.4.	Vibration (non-operating)	MIL-STD-202, Method 201	0.06" Total p-p, 10 to 55 Hz
6.5.	Shock (non-operating)	MIL-STD-202, Method 213, Test Condition J	30g, 11ms, half-sine

Note 1 : Output maintained over this temperature range. Other requirements of this specification may not be met when operating outside the temperature range in 2.1.

Table 1 : ORDERING INFORMATION

Ambient Temp. (°C)	Option	Phase Noise Option			G-Sensitivity Option
		A	B	C	
-20°C ~ +70°C	±30 ppb	NA-10M-6810	NA-10M-6811	NA-10M-6812	Y
		NA-10M-6815	NA-10M-6816	NA-10M-6817	N
	±20 ppb	NA-10M-6820	NA-10M-6821	NA-10M-6822	Y
		NA-10M-6825	NA-10M-6826	NA-10M-6827	N
	±10 ppb	NA-10M-6830	NA-10M-6831	NA-10M-6832	Y
		NA-10M-6835	NA-10M-6836	NA-10M-6837	N
	±5 ppb	NA-10M-6840	NA-10M-6841	NA-10M-6842	Y
		NA-10M-6845	NA-10M-6846	NA-10M-6847	N
-40°C ~ +85°C	±100 ppb	NA-10M-6860	NA-10M-6861	NA-10M-6862	Y
		NA-10M-6865	NA-10M-6866	NA-10M-6867	N
	±50 ppb	NA-10M-6870	NA-10M-6871	NA-10M-6872	Y
		NA-10M-6875	NA-10M-6876	NA-10M-6877	N
	±30 ppb	NA-10M-6880	NA-10M-6881	NA-10M-6882	Y
		NA-10M-6885	NA-10M-6886	NA-10M-6887	N
	±20 ppb	NA-10M-6890	NA-10M-6891	NA-10M-6892	Y
		NA-10M-6895	NA-10M-6896	NA-10M-6897	N

Phase Noise Test Data

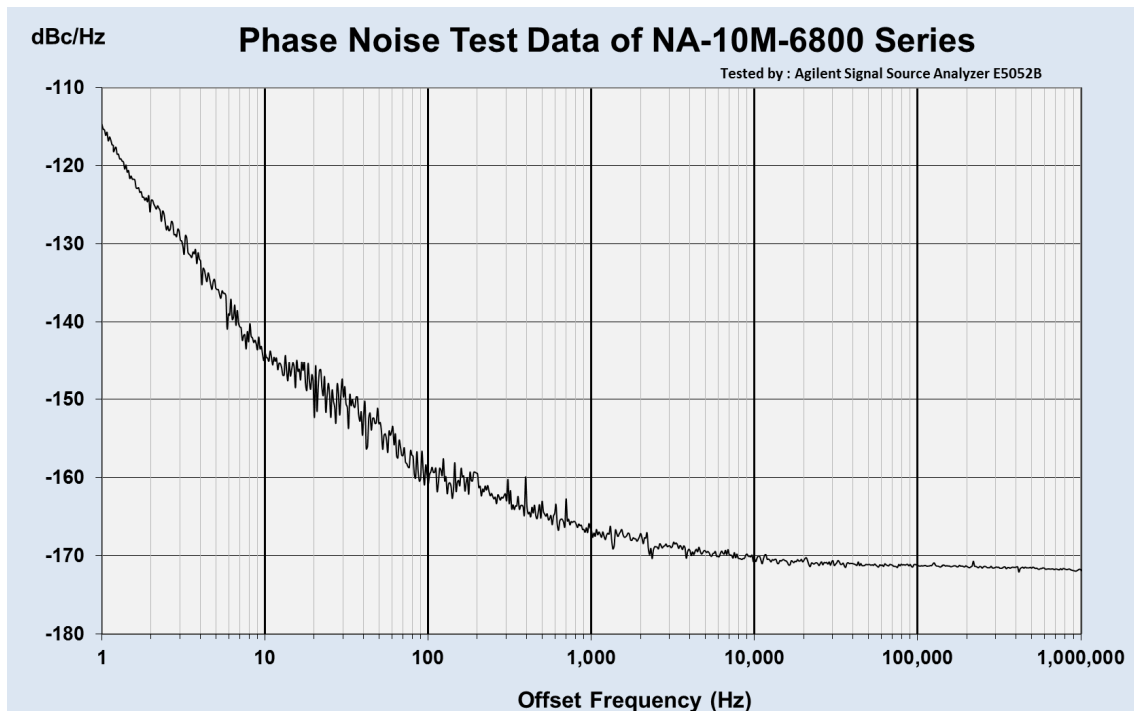

OUTLINE DRAWING

