



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





PTOD102CR00

Platinum Temperature Sensor

Product Description

This sensor is a resistance temperature detector (RTD) using a platinum resistor as sensing element. This platinum resistor consists of a structured platinum film on a ceramic substrate, passivated by glass coating. The contact areas are solderable AgPd (Silver Palladium).

This SMD - Sensor can be mounted face down to a PCB

The characteristic curve of this Platinum RTD complies with DIN EN 60751. The usage of Platinum as resistive material guarantees high long term stability.

The tolerance class is determined at 25°C (room temperature calibration)

Due to small outline and low mass this RTD has a low time constant; therefore it is a suitable solution for fast and precise feedback control systems.

Features

- ◆ R_0 : 1000 Ω
- ◆ TCR 3850ppm/K
- ◆ Application temperature -50...150°C
- ◆ resistance tolerance $\pm 0.23\%$
- ◆ Size 1.6 x 3.25 x 0.9 mm³ (width/length/height)
- ◆ SMD size 1206
- ◆ AgPd-solderable contacts for face down mounting to PCB's

Applications

- ◆ Specific temperature feedback control
- ◆ Medical
- ◆ HVC
- ◆ White goods
- ◆ Automotive
- ◆ Industrial applications

- ◆ **Platinum Temperature Sensor**
- ◆ **Conformal to DIN EN 60751**
- ◆ **Global interchangeability**
- ◆ **Wide temperature range**
- ◆ **Fast response time**
- ◆ **Class C (F0.6) tolerance**
- ◆ **Small outline dimensions**
- ◆ **SMD size 1206**

Sensor properties

Parameter	Symbol	Condition	Min	Typical	Max	Unit
Nominal Resistance at 0 °C	R ₀	Class B (F0.6)	997.7	1000.0	1002.3	Ω
Nominal Resistance at 25 °C	R ₂₅	Class B (F0.6)	1094.3	1097.3	1100.3	Ω
Temperature tolerance at 25 °C		Class B (F0.6)	-0.78		+0.78	°C
Temperature Coefficient of Resistance	TCR	0 °C, 100 °C		3850		ppm/°C
Temperature Range		Class C (F0.6)	-50		150	°C
Selfheating Coefficient in air, flow: 1 m/s				0.4		°C/mW
Response Time Water Flow: 0.4 m/s	τ _{W,0.9}			0.3		s
Response Time Air Flow: 1 m/s	τ _{A,0.9}			15		s
Measuring Current		Class C (F0.6)			0.5	mA

Calculation Formulas

The calculation formulas of this Pt-RTD are defined in DIN EN 60751 as following:

For T ≥ 0 °C: $R_{(T)} = R_{(0)} \cdot (1 + a \cdot T + b \cdot T^2)$

For T < 0 °C: $R_{(T)} = R_{(0)} \cdot [1 + a \cdot T + b \cdot T^2 + c \cdot (T - 100^\circ\text{C}) \cdot T^3]$

Polynomial coefficients: a = 3.9083E-03 b = -5.775E-07 c = -4.183E-12

Tolerances: class F0.6 (C=2B): ± (0.6+0.007*|T/°C|) °C (-50 ... +150 °C)

Mechanical Dimensions

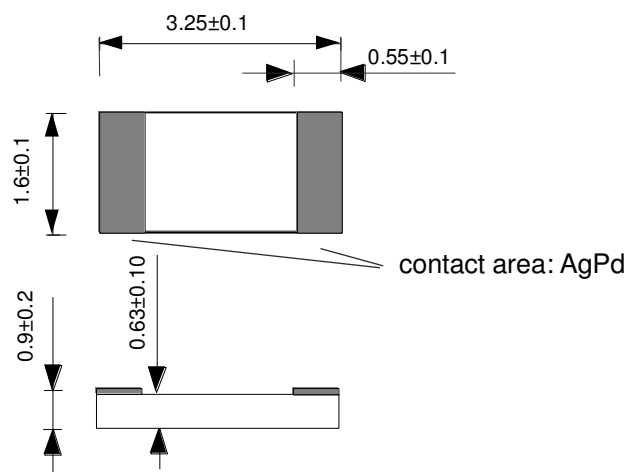


Figure 1: Mechanical dimensions of Platinum Temperature Sensor

PTOD102BR00

Platinum Temperature Sensor


Proposed Solder Profile

The PTOD sensor elements can be soldered using reflow soldering process. The following combination of soldering paste and temperature profile was tested and verified, other soldering pastes and profiles should be tested before using for series production.

Soldering paste: AIM NC254 SAC305 (Sn96.5, Ag0.3, Cu0.5)

Reflow profile: Rate of temperature rise: 2°C / sec max.

Ramp up to 150°C	Progress through 175°C	To peak temp 235±5°C	Time above 217°C	Cooldown ≤ 4°C / sec	Profile length ambient to start of cooldown
120±15 sec	120±15 sec	75±15 sec	75±15 sec	120±15 sec	ca. 6min

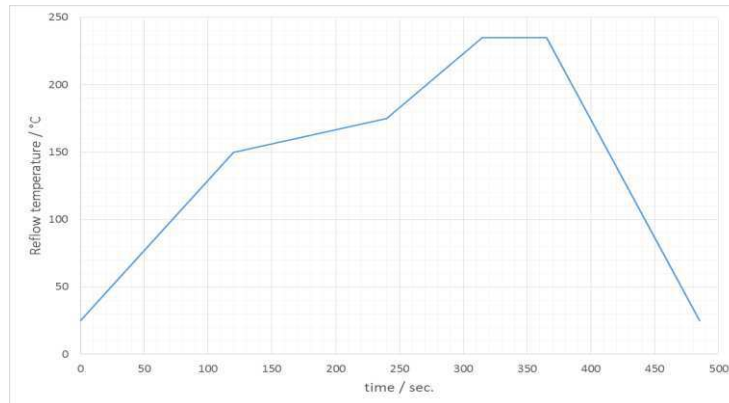

Ordering Information

Description	Part Number
PTOD102CR00:PT1000,1.6X3.2,C	NB-PTCO-330

Packing and Minimum Order Quantity

Packing	PCS per Packing Unit	MOQ
Tape: 8 mm width, pitch: 4 mm on 7 inch reel	3500	3500

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
1711 139th Lane NW
Andover, MN 55304
Tel: +1 763 689 4870
Fax: +1 763 689 5033

customercare.ando@te.com

EUROPE

TE Connectivity Sensors Germany GmbH
Hauert 13
44227 Dortmund
Germany
Tel : +49 231 9740-0
Fax : +49 231 9740-20

customercare.dtmtd@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 368 Wulian 1st Road
Gongxing Town
Shuangliu, Chengdu
Sichuan, 610200
China
Tel: +86 (0) 28 8573 9088
Fax: +86 (0) 28 8573 9070

customercare.chdu@te.com

te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, MEAS, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.

[Model Rev]
[Internal ECN]