



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PART NAME	NON-METALLIC ENCLOSURE (STYLE B)	PART No.	NBB-10245 & NBB-10265 & NBB-15245 & NBB-22245
-----------	----------------------------------	----------	---

MATERIAL:
UL LISTED INDOOR VERSION
 SOLID BODY & COVER _____ ABS/PC BLENDED PLASTIC
 UL94-5VB FLAMMABILITY RATING
 CLEAR COVER _____ POLYCARBONATE PLASTIC
 UL94V-0 FLAMMABILITY RATING
 UV STABILIZED
UL LISTED OUTDOOR VERSION
 SOLID BODY & COVER _____ PBT/PC BLENDED PLASTIC
 UL94-5VA FLAMMABILITY RATING
 UV STABILIZED
ABS VERSION
 SOLID BODY & COVER _____ ABS
 UL94-HB FLAMMABILITY RATING

FINISH:
 BODY _____ LIGHT GRAY
 COVER _____ LIGHT GRAY OR CLEAR
 LATCHES & HINGES _____ NON-METALLIC
 WALL MOUNTING BRACKETS _____ STAINLESS STEEL


INDUSTRY STANDARDS:
UL LISTED INDOOR VERSION
 UL508 TYPE 1, 2, 3, 3R, 4, 4X INDOOR, 12 & 13
 NEMA TYPE 1, 2, 3, 3R, 4, 4X, 12 & 13
 IEC529-IP65
UL LISTED OUTDOOR VERSION
 UL508 TYPE 1, 2, 3, 3R, 4, 4X, 12 & 13
 NEMA TYPE 1, 2, 3, 3R, 4, 4X, 12 & 13
 IEC529-IP65
ABS VERSION
 NEMA TYPE 1, 2, 3, 3R, 4, 4X, 12 & 13
 IEC529-IP65

ALL VERSIONS
 GASKET _____ MODIFIED POLYURETHANE

NOTE: UNIT COMES COMPLETE WITH
 (4) WALL MOUNTING BRKTS.
 & (4) M5 x 10mm LG. TRUSS
 HD. MACHINE SCREWS (NOT
 SHOWN)

COVER INCLUDES GRAY POLY-
 URETHANE GASKET.

INTERNAL HINGED PANEL MOUNTING
 BRACKETS, AIR & MOISTURE VENTS,
 STAINLESS STEEL LOCKING HASP
 AND GALVANIZED STEEL INTERNAL
 PANEL ARE NOT INCLUDED, BUT
 CAN BE PURCHASED SEPARATELY.

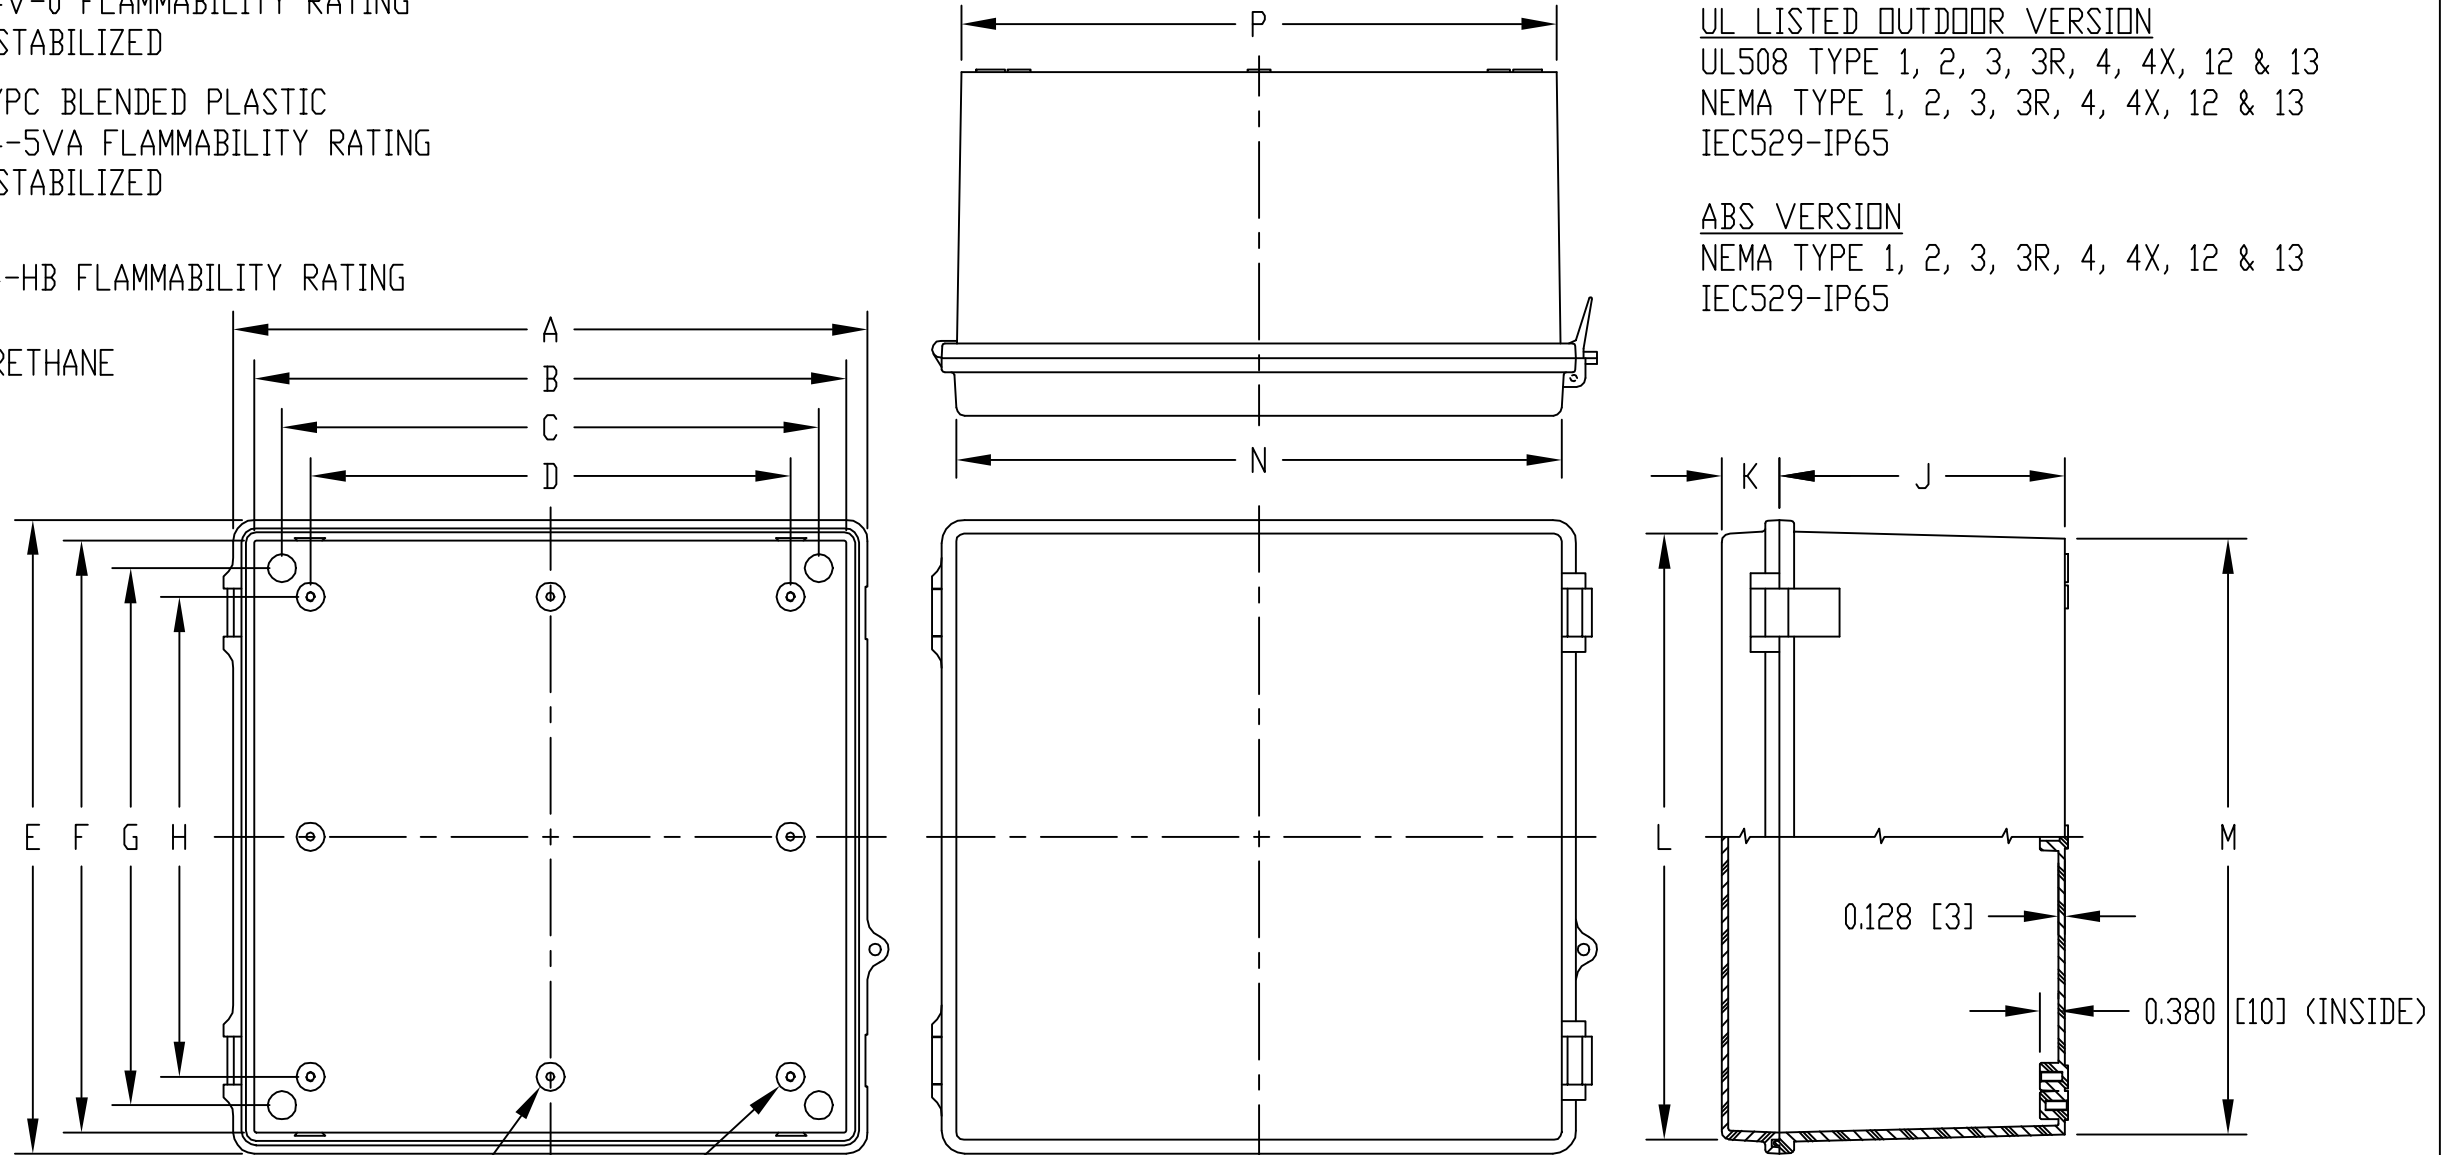

0.575 [15] DIA. BOSS WITH 0.166 [4] DIA.
 HOLE x 0.395 [10] DEEP (4) PLACES
 BOSSES ACCEPT M5 METRIC OR #10 STD. SHEET
 METAL SCREWS x 0.375 [9] LG. (NOT SUPPLIED)

0.575 [15] DIA. BOSS WITH
 M5 x 0.8mm THREADED BRASS
 INSERT - (4) PLACES INSIDE
 (4) PLACES OUTSIDE

DIMENSIONS = INCHES
 [MILLIMETERS]
NOTE: ALL DIMENSIONS HAVE ±0.039 [±1] TOLERANCE
 UNLESS OTHERWISE SPECIFIED

VIEW LESS COVER				DIMENSIONS													
UL LISTED INDOOR VERSION	UL LISTED OUTDOOR VERSION	ABS VERSION		A	B	C	D	E	F	G	H	J	K	L	M	N	P
PART NO.	PART NO.	PART NO.															
SOLID COVER	CLEAR COVER	SOLID COVER	SOLID COVER														
NBB-10245	NBB-10265	NBB-15245	NBB-22245	13.010	12.144	11.013	9.846	13.000	12.140	11.020	9.846	5.857	1.185	12.435	12.225	12.425	12.215
				[330]	[308]	[280]	[250]	[330]	[308]	[280]	[250]	[149]	[30]	[316]	[311]	[316]	[310]