



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NHD-3.5-320240MF-ASXN#-T

TFT (Thin-Film-Transistor) Color Liquid Crystal Display Module

| | |
|---------|---------------------------------|
| NHD- | Newhaven Display |
| 3.5- | 3.5" Diagonal |
| 320240- | 320xRGBx240 Pixels |
| MF- | Model |
| A- | Built-in Driver / No Controller |
| S- | Sunlight Readable |
| X- | TFT |
| N- | TN, Wide Temperature |
| #- | RoHS Compliant |
| T- | 4-Wire Resistive Touch Panel |

Newhaven Display International, Inc.

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

www.newhavendisplay.com

nhtech@newhavendisplay.com

nhsales@newhavendisplay.com


Document Revision History

| Revision | Date | Description | Changed by |
|----------|----------|------------------------------------|------------|
| 0 | 04/29/16 | Initial Release | SB |
| 1 | 6/30/16 | Added Chromaticity | SB |
| 2 | 9/22/16 | Backlight & Supply Current Updated | SB |

Functions and Features

- 320xRGBx240 resolution
- LED backlight
- 24-bit Digital RGB interface (6.4MHz)
- 3.3V power supply
- With 4-Wire resistive Touch Panel
- Sunlight readable

Mechanical Drawing

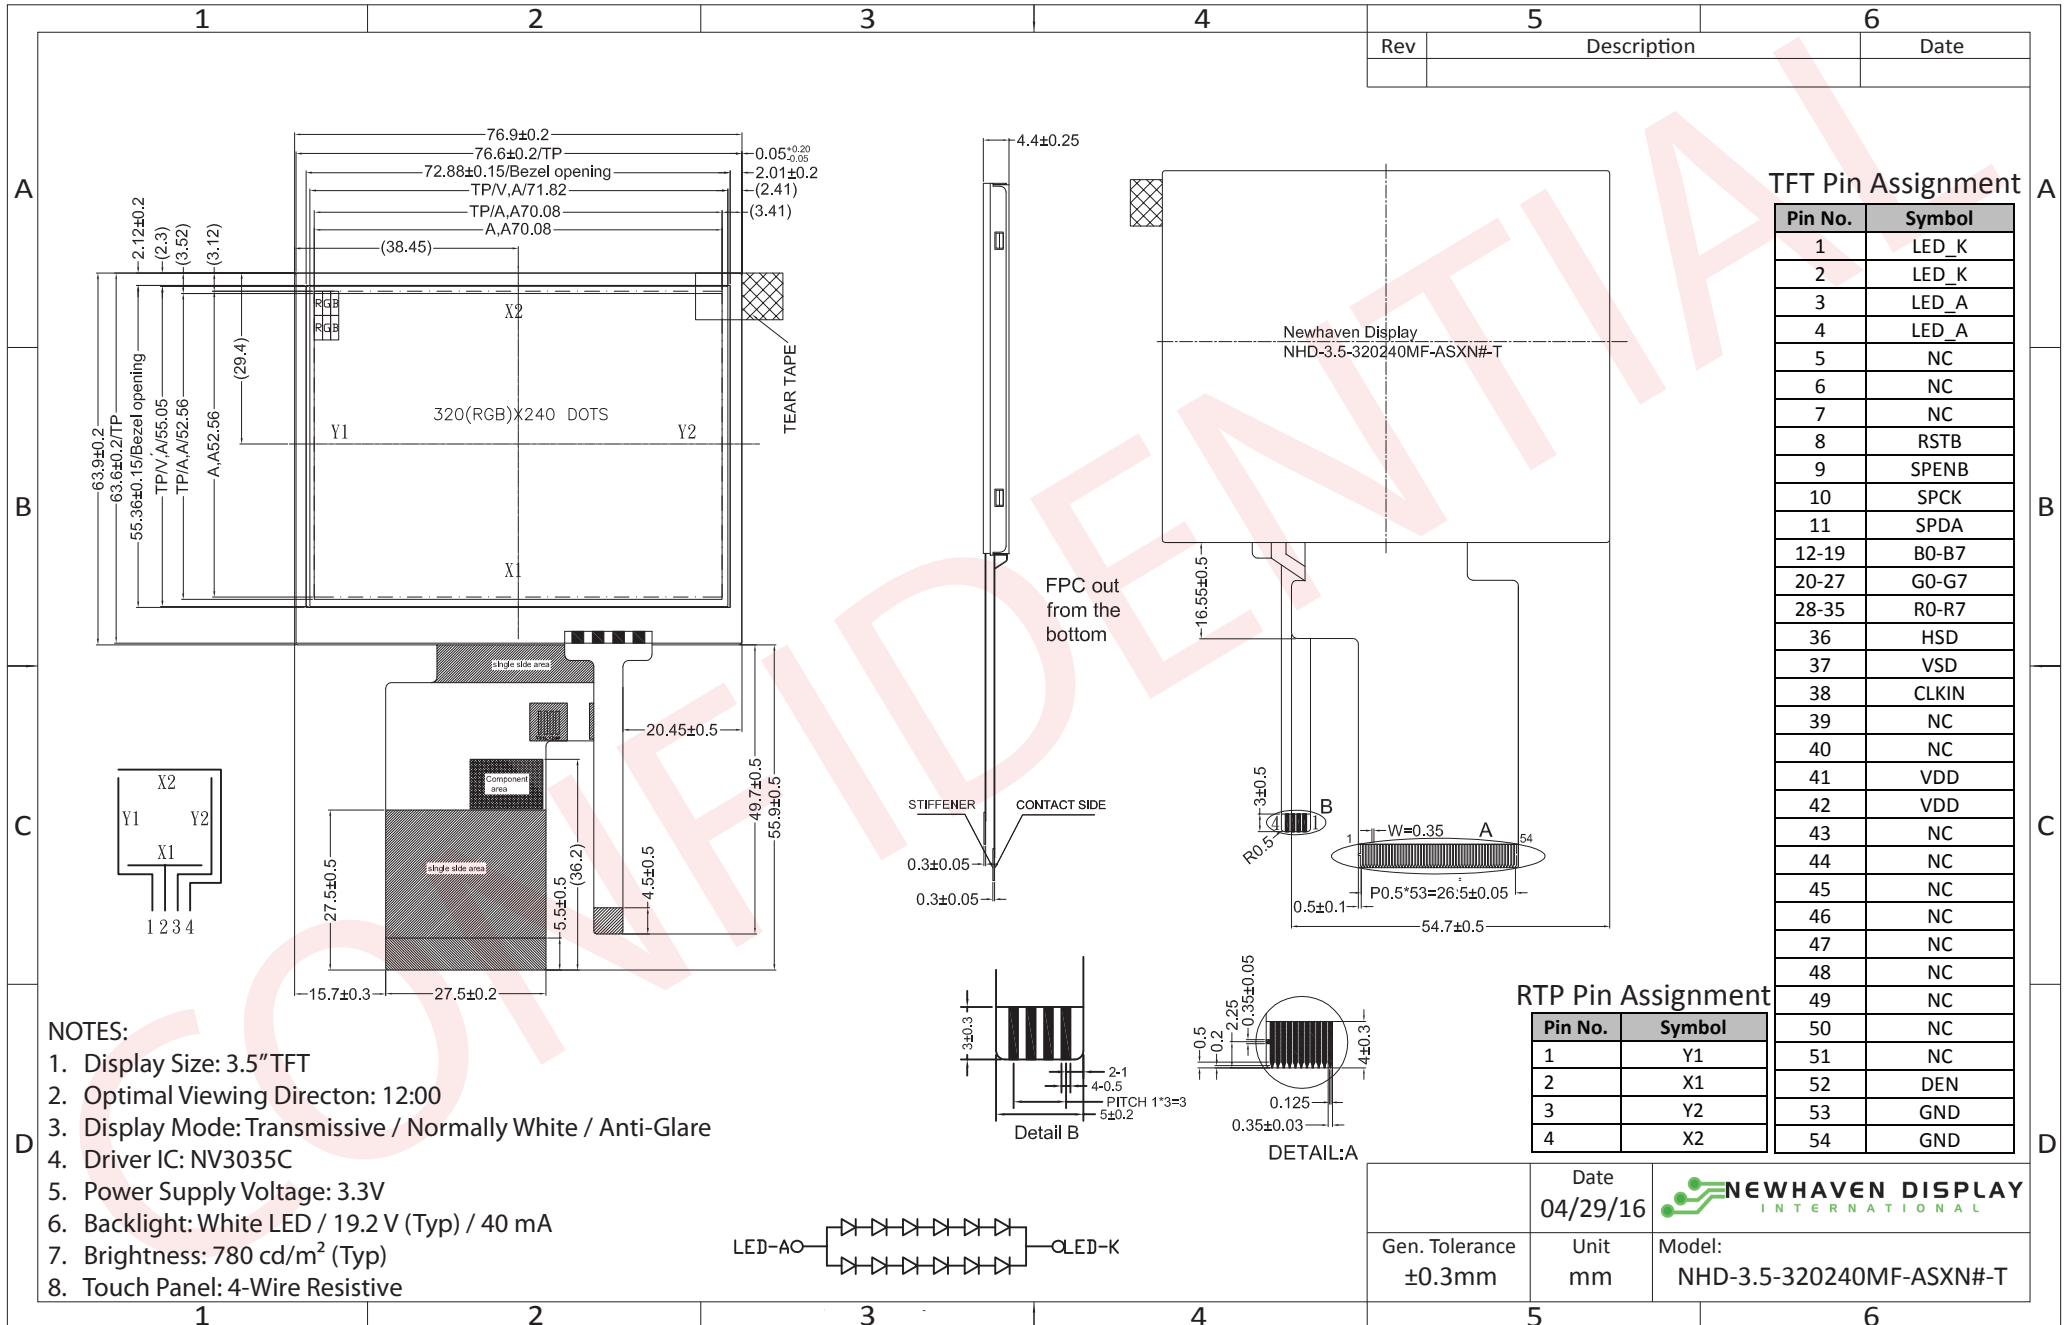

The drawing contained herein is the exclusive property of Newhaven Display International, Inc. and shall not be copied, reproduced, and/or disclosed in any format without permission.

Pin Description

TFT:

| Pin No. | Symbol | External Connection | Function Description |
|---------|----------|---------------------|---|
| 1-2 | LED_K | Power Supply | Backlight Cathode (Ground) |
| 3-4 | LED_A | Power Supply | Backlight Anode (40mA @ 19.2V) |
| 5-7 | NC | - | No Connect |
| 8 | RESET | MPU | Active LOW Reset signal |
| 9 | /CS | MPU | Active LOW Serial Chip Select signal |
| 10 | SCK | MPU | Serial Clock signal |
| 11 | SDI | MPU | Serial Data signal |
| 12-19 | B0-B7 | MPU | Blue Data signals |
| 20-27 | G0-G7 | MPU | Green Data signals |
| 28-35 | R0-R7 | MPU | Red Data signals |
| 36 | HSYNC | MPU | Horizontal (Line) Sync signal |
| 37 | VSYNC | MPU | Vertical (Frame) Sync signal |
| 38 | DOTCLOCK | MPU | Dot Clock signal |
| 39-40 | NC | - | No Connect |
| 41-42 | VDD | Power Supply | Supply Voltage for LCD and logic (3.3V) |
| 43-51 | NC | - | No Connect |
| 52 | DEN | - | Data Enable signal (No Connect) |
| 53-54 | GND | Power Supply | Ground |

Recommended connector: 54pin, 0.5mm pitch, FFC connector. Molex P/N 51296-5494

Resistive Touch Panel:

| Pin No. | Symbol | External Connection | Function Description |
|---------|--------|---------------------|----------------------|
| 1 | Y1 | Touch Controller | Left |
| 2 | X1 | Touch Controller | Down |
| 3 | Y2 | Touch Controller | Right |
| 4 | X2 | Touch Controller | Up |

Recommended connector: 4pin, 1.0mm pitch, FFC connector. Molex P/N 52207-0485

Driver Information

Built-in NV3035C driver. No controller.

Please download specification at http://www.newhavendisplay.com/app_notes/NV3035C.pdf

Note: To achieve optimum VCOM and VGL settings, the SPI interface may be used to set the following registers:

ROEh = 6Bh

ROFh = 24h

Electrical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------------------------|------------------|---|----------------------|--------|----------------------|------|
| Operating Temperature Range | T _{OP} | Absolute Max | -20 | - | +70 | °C |
| Storage Temperature Range | T _{ST} | Absolute Max | -30 | - | +80 | °C |
| Digital Supply Voltage | V _{DD} | - | 3.0 | 3.3 | 3.6 | V |
| Supply Current | I _{DD} | V _{DD} =3.3V | 5 | 10 | 15 | mA |
| "H" Level input | V _{IH} | - | 0.8*V _{DD} | - | V _{DD} | V |
| "L" Level input | V _{IL} | - | V _{SS} | - | 0.2*V _{DD} | V |
| "H" Level output | V _{OH} | - | V _{DD} -0.4 | - | V _{DD} | V |
| "L" Level output | V _{OL} | - | V _{SS} | - | V _{SS} +0.4 | V |
| Backlight Supply Voltage | V _{LED} | - | 17.4 | 19.2 | 19.8 | V |
| Backlight Supply Current | I _{LED} | V _{LED} = 19.2V | 30 | 40 | 50 | mA |
| Backlight Lifetime* | - | I _{LED} = 40 mA T _{OP} = 25° C | 20,000 | 50,000 | - | Hrs. |

*Backlight lifetime is rated as Hours until **half-brightness**, under normal operating conditions.

Optical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit | |
|------------------------|----------------|--------------------------|-------|--------|-------|-------------------|---|
| Optimal Viewing Angles | Top | CR ≥ 10 | - | 40 | - | ° | |
| | Bottom | | - | 60 | - | ° | |
| | Left | | - | 60 | - | ° | |
| | Right | | - | 60 | - | ° | |
| Contrast Ratio | CR | - | 200 | 350 | - | - | |
| Luminance | L _V | I _{LED} = 40 mA | 620 | 780 | - | cd/m ² | |
| Response Time | Rise | T _{OP} = 25° C | - | 25 | 40 | ms | |
| | Fall | | - | 25 | 40 | ms | |
| Chromaticity | Red | X _R | - | 0.520 | 0.570 | 0.620 | - |
| | | Y _R | - | 0.258 | 0.308 | 0.358 | - |
| | Green | X _G | - | 0.268 | 0.308 | 0.358 | - |
| | | Y _G | - | 0.578 | 0.628 | 0.678 | - |
| | Blue | X _B | - | 0.0096 | 0.146 | 0.196 | - |
| | | Y _B | - | 0.051 | 0.101 | 0.151 | - |
| White | X _W | - | 0.223 | 0.273 | 0.323 | - | |
| | Y _W | - | 0.278 | 0.328 | 0.378 | - | |

Touch Panel Characteristics


| Item | Min. | Typ. | Max. | Unit |
|-----------------------------|-----------|------|------|------------|
| Linearity | - | - | 1.5 | % |
| Circuit Resistance – X-Axis | 200 | - | 900 | Ω |
| Circuit Resistance – Y-Axis | 200 | - | 900 | Ω |
| Insulation Resistance | 20 | - | - | MΩ |
| Operating Voltage | - | - | 5 | V |
| Chattering | - | - | 10 | Ms |
| Transmittance | 75 | - | - | % |
| Activation Force | 70 | - | 120 | g |
| Pen Writing Durability | 100,000 | - | - | Characters |
| Pitting Durability | 1,000,000 | - | - | Touches |
| Surface Hardness | 3 | - | - | H |
| Haze | - | 7 | - | % |

Timing Characteristics


| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|---|--------------------|------|-------|------|-------|--|
| System Operation Timing | | | | | | |
| VDD power source slew time | T _{POR} | | | 1000 | us | From 0V to 90% VDD |
| RSTB active pulse width | T _{RSTB} | 40 | | | us | VDD=3.3V |
| Input Output Timing | | | | | | |
| CLKIN clock time | T _{clk} | - | | 35.7 | ns | Please refer to timing table(P25) |
| HSD to CLKIN | T _{hc} | - | - | 1 | CLKIN | |
| HSD width | T _{hwh} | 1 | - | - | CLKIN | |
| VSD width | T _{vwh} | 1 | - | - | Th | |
| HSD period time | T _h | 60 | 63.56 | 67 | us | |
| VSD setup time | T _{vst} | 12 | - | - | ns | |
| VSD hold time | T _{vhd} | 12 | - | - | ns | |
| HSD setup time | T _{hst} | 12 | - | - | ns | |
| HSD hold time | T _{hhd} | 12 | - | - | ns | |
| Data set-up time | T _{dsu} | 12 | - | - | ns | DIN[23:0] to CLKIN |
| Data hold time | T _{dhd} | 12 | - | - | ns | DIN[23:0] to CLKIN |
| DEN setup time | T _{esd} | 12 | - | - | ns | DEN to CLKIN |
| Time that VSD to 1 st line data input | T _{vs} | 2 | 13 | 127 | Th | @CIR601/8bit RGB HV mode Control by HDLY[6:0] setting T _{vs} =HDLY[6:0] |
| Time that CCIR_V to 1 st line data input | T _{vs} | 12 | 20 | 28 | Th | @CCIR656 NTSC mode Control by HDLY[6:0] setting T _{vs} =HDLY[6:0] |
| Time that CCIR_V to 1 st line data input | T _{vs} | 17 | 25 | 33 | Th | @CCIR656 PAL mode Control by HDLY[6:0] setting T _{vs} =HDLY[6:0] |
| Time that VSD to 1 st line data input | T _{vs} | 2 | 13 | 127 | Th | @24bit RGB HV mode Control by HDLY[6:0] setting T _{vs} =HDLY[6:0] |
| Source output stable time 1 | T _{st} | - | 25 | 30 | us | 96% final, CL=30pF, RL=2K |
| Gate output stable time | T _{gst} | - | 500 | 1000 | ns | 96% final, CL=40pF |
| VCOMOUT output stable time | T _{cst} | - | 4 | 8 | us | 96% final, CL=33nF, RL=100ohm |
| 3-wire serial communication AC timing | | | | | | |
| Serial clock | T _{spck} | 320 | - | - | ns | |
| SPCK pulse duty | T _{scdut} | 40 | 50 | 60 | % | T _{ckh} /T _{spck} |
| Serial data setup time | T _{isu} | 120 | - | - | ns | |
| Serial data hold time | T _{ihd} | 120 | - | - | ns | |
| Serial clock high/low | T _{ssw} | 120 | - | - | ns | |
| Chip select distinguish | T _{cd} | 1 | - | - | us | |
| SPENA to VSD | T _{cv} | 1 | - | - | us | |
| SPENB input setup time | T _{eck} | 150 | - | - | Ns | |
| SPENB input hold time | T _{cke} | 150 | - | - | ns | |

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|---|------------------|------|------|------|-------|-------------------------|
| CLKIN frequency | F _{clk} | 6.1 | 6.4 | 8.0 | MHz | VDD=3.0~3.6V |
| CLKIN cycle time | T _{clk} | 125 | 156 | 164 | ns | |
| CLKIN pulse duty | T _{cwh} | 40 | 50 | 60 | % | T _{clk} |
| Time that HSD to 1 st data input(NTSC) | T _{hs} | 40 | 70 | 255 | CLKIN | DDLY=70,Offset=0(fixed) |


Input Data Format

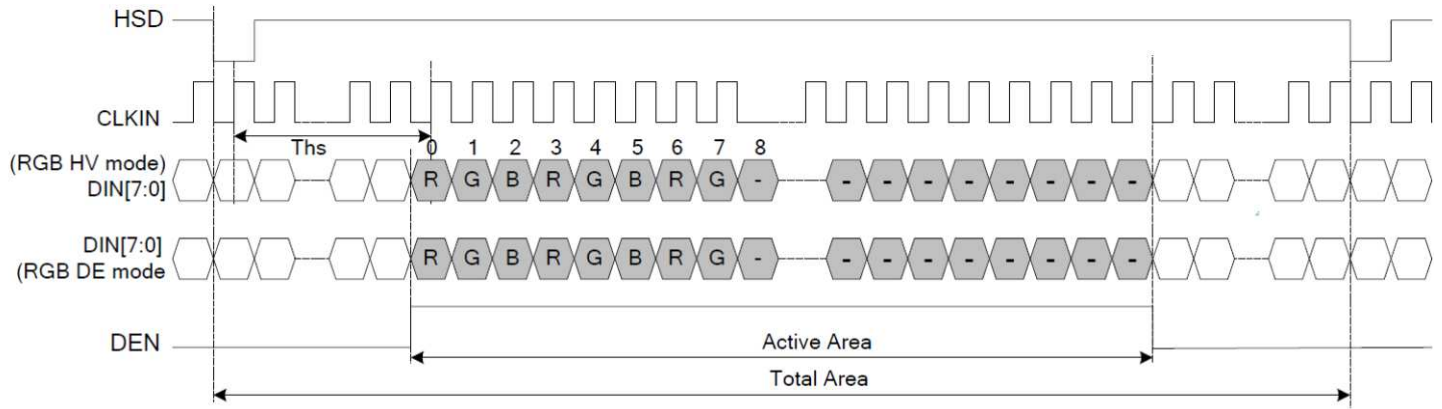


Clock and Data Input Timing Diagram

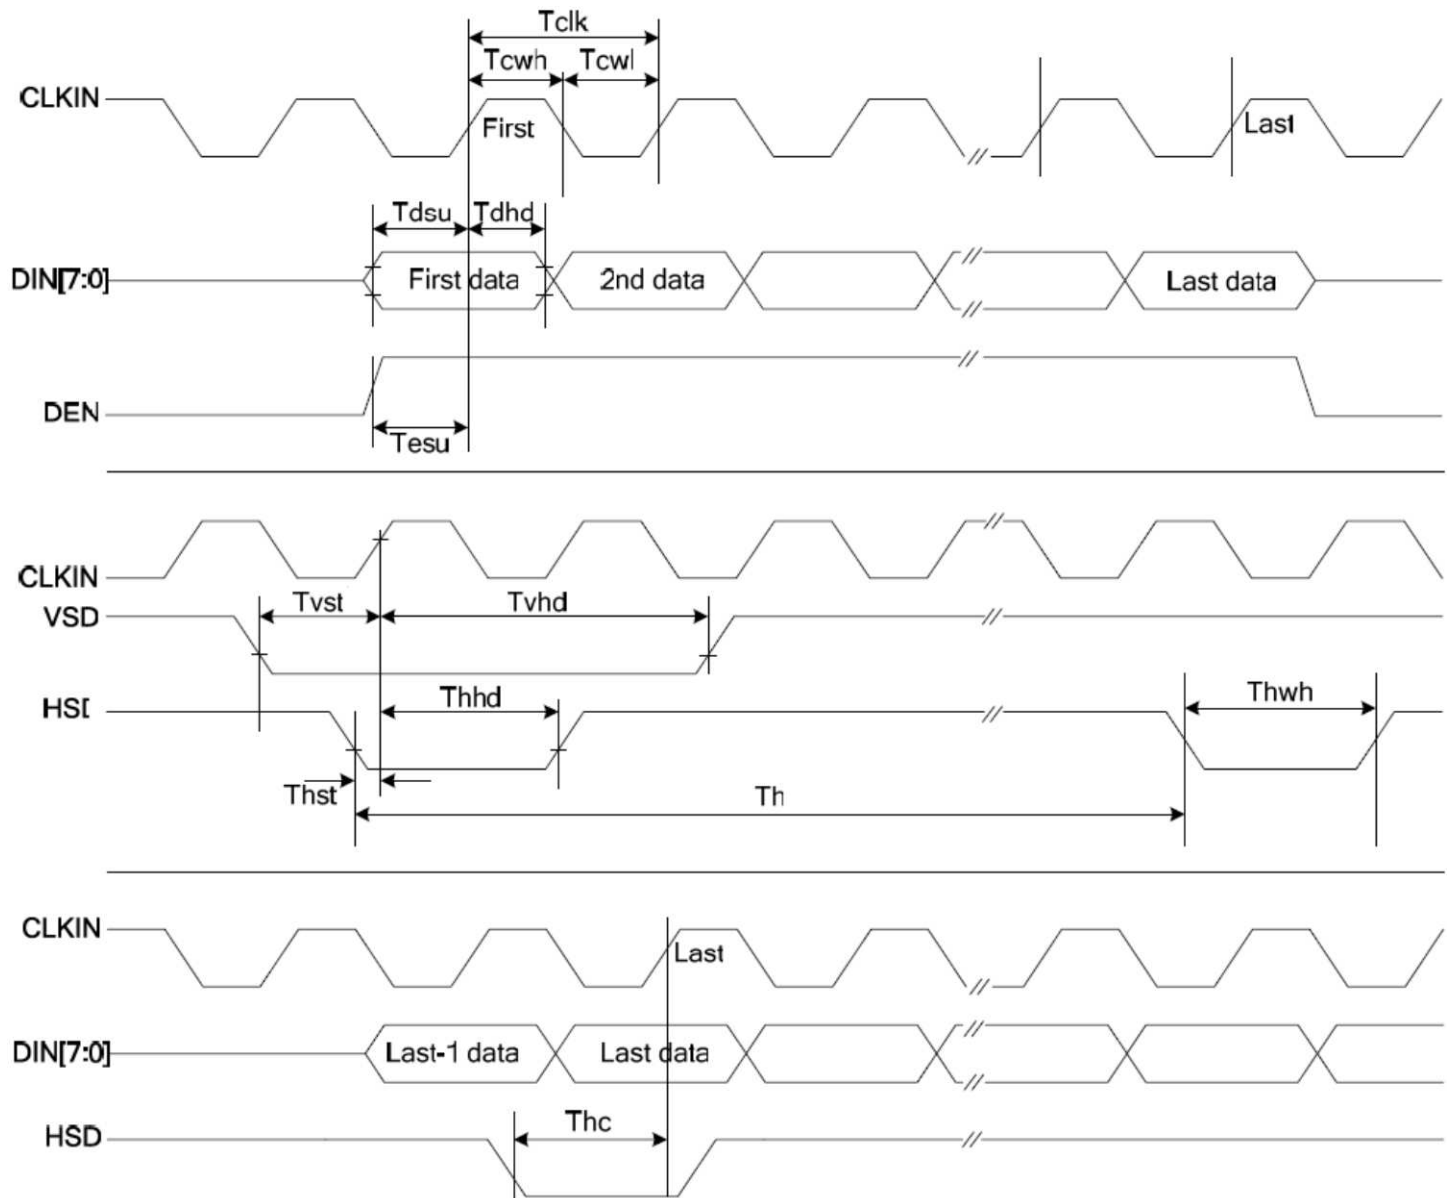

3-wire Timing Diagram

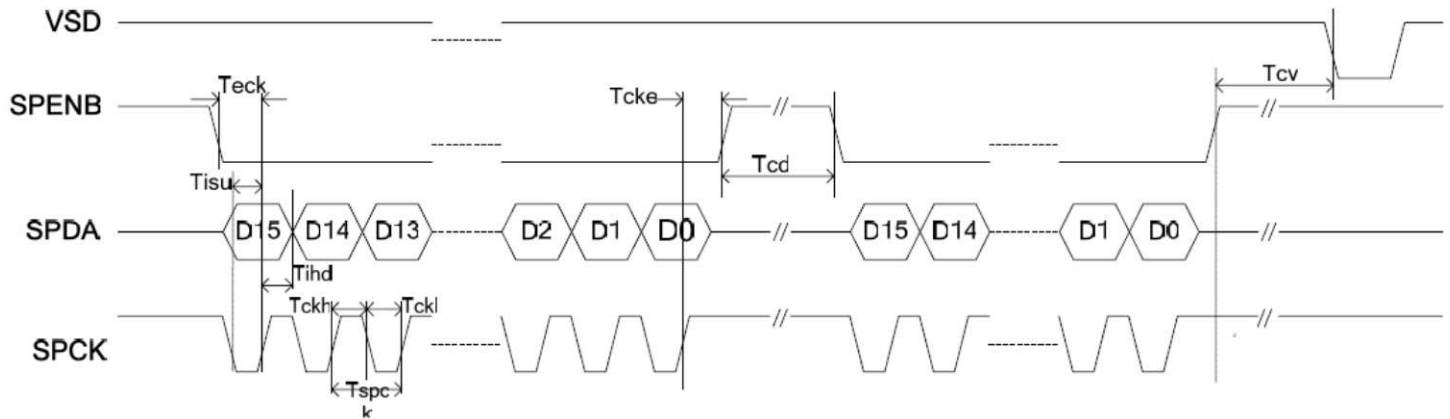

Input Data Timing

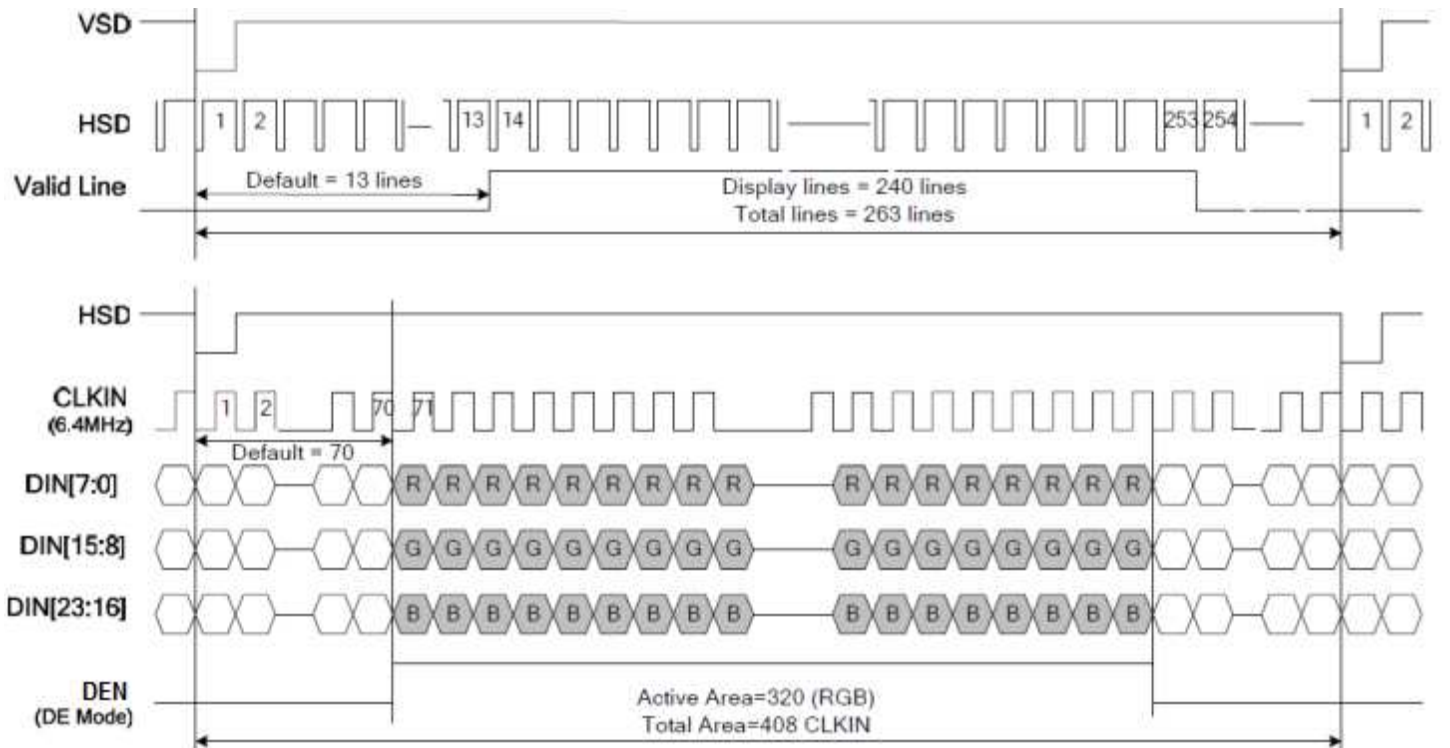

Quality Information

| Test Item | Content of Test | Test Condition | Note |
|---------------------------------------|---|---|------|
| High Temperature storage | Endurance test applying the high storage temperature for a long time. | +70°C , 240hrs | 2 |
| Low Temperature storage | Endurance test applying the low storage temperature for a long time. | -20°C , 240hrs | 1,2 |
| High Temperature Operation | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time. | +60°C , 240hrs | 2 |
| Low Temperature Operation | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time. | -10°C , 240hrs | 1,2 |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +50°C , 90% RH , 160hrs | 1,2 |
| Thermal Shock resistance | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress. | -20°C,30min -> 25°C,5min -> 70°C,30min = 1 cycle 100 cycles | |
| Vibration test | Endurance test applying vibration to simulate transportation and use. | 10-55Hz , 15mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes | 3 |
| Static electricity test | Endurance test applying electric static discharge. | VS=4KV, RS=330kΩ, CS=150pF Five times | |

Note 1: No condensation to be observed.

Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.

Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisply.com/specs/precautions.pdf

Warranty Information and Terms & Conditions

http://www.newhavendisply.com/index.php?main_page=terms